

Article No. : 6SL3210-1KE23-8AP1



Figure similar

Client order no. :  
Order no. :  
Offer no. :  
Remarks :

Item no. :  
Consignment no. :  
Project :

### Rated data

#### Input

Number of phases	3 AC
Line voltage	380 ... 480 V +10 % -20 %
Line frequency	47 ... 63 Hz
Rated current (LO)	48.20 A
Rated current (HO)	45.20 A

#### Output

Number of phases	3 AC	
<b>Rated voltage</b>	<b>400V IEC</b>	<b>480V NEC 1)</b>
Rated power (LO)	18.50 kW	25.00 hp
Rated power (HO)	15.00 kW	20.00 hp
Rated current (LO)	37.00 A	
Rated current (HO)	31.00 A	
Rated current (IN)	38.00 A	
Max. output current	62.00 A	
Pulse frequency	4 kHz	
Output frequency for vector control	0 ... 240 Hz	
Output frequency for V/f control	0 ... 550 Hz	

#### Overload capability

Low Overload (LO)
150 % base load current IL for 3 s, followed by 110 % base load current IL for 57 s in a 300 s cycle time
High Overload (HO)
200% base load current IH for 3 s, followed by 150% base load current IH for 57 s in a 300 s cycle time

### General tech. specifications

Power factor $\lambda$	0.70 ... 0.85
Offset factor $\cos \varphi$	0.95
Efficiency $\eta$	0.97
Sound pressure level (1m)	66 dB
Power loss	448.0 W
Filter class (integrated)	Class A

### Communication

Communication	PROFIBUS DP
---------------	-------------

### Inputs / outputs

#### Standard digital inputs

Number	6
Switching level: 0→1	11 V
Switching level: 1→0	5 V
Max. inrush current	15 mA

#### Fail-safe digital inputs

Number	1
--------	---

#### Digital outputs

Number as relay changeover contact	1
Output (resistive load)	DC 30 V, 0.5 A
Number as transistor	1
Output (resistive load)	DC 30 V, 0.5 A

#### Analog / digital inputs

Number	1 (Differential input)
Resolution	10 bit

#### Switching threshold as digital input

0→1	4 V
1→0	1.6 V

#### Analog outputs

Number	1 (Non-isolated output)
--------	-------------------------

#### PTC/ KTY interface

1 motor temperature sensor input, sensors that can be connected PTC, KTY and Thermo-Click, accuracy  $\pm 5^\circ\text{C}$

### Closed-loop control techniques

V/f linear / square-law / parameterizable	Yes
V/f with flux current control (FCC)	Yes
V/f ECO linear / square-law	Yes
Sensorless vector control	Yes
Vector control, with sensor	No
Encoderless torque control	No
Torque control, with encoder	No

## Data sheet for SINAMICS G120C

Article No. : 6SL3210-1KE23-8AP1

### Ambient conditions

Cooling	Air cooling using an integrated fan
Cooling air requirement	0.018 m <sup>3</sup> /s (0.636 ft <sup>3</sup> /s)
Installation altitude	1,000 m (3,280.84 ft)

### Ambient temperature

Operation	-10 ... 40 °C (14 ... 104 °F)
Transport	-40 ... 70 °C (-40 ... 158 °F)
Storage	-25 ... 55 °C (-13 ... 131 °F)

### Relative humidity

Max. operation	95 % At 40 °C (104 °F), condensation and icing not permissible
----------------	----------------------------------------------------------------

### Connections

#### Signal cable

Conductor cross-section	0.15 ... 1.50 mm <sup>2</sup> (AWG 24 ... AWG 16)
-------------------------	------------------------------------------------------

#### Line side

Version	Plug-in screw terminals
Conductor cross-section	6.00 ... 16.00 mm <sup>2</sup> (AWG 10 ... AWG 6)

#### Motor end

Version	Plug-in screw terminals
Conductor cross-section	6.00 ... 16.00 mm <sup>2</sup> (AWG 10 ... AWG 6)

#### DC link (for braking resistor)

Version	Plug-in screw terminals
Conductor cross-section	6.00 ... 16.00 mm <sup>2</sup> (AWG 10 ... AWG 6)
Line length, max.	15 m (49.21 ft)
PE connection	On housing with M4 screw

#### Max. motor cable length

Shielded	50 m (164.04 ft)
Unshielded	100 m (328.08 ft)

### Mechanical data

Degree of protection	IP20 / UL open type
Frame size	F5C
Net weight	4.40 kg (9.70 lb)

### Dimensions


Width	140 mm (5.51 in)
Height	295 mm (11.61 in)
Depth	203 mm (7.99 in)

### Standards

Compliance with standards	CE, cUL, UL, KC, EAC, C-Tick (RCM)
CE marking	EMC Directive 2004/108/EC, Low-Voltage Directive 2006/95/EC

### Converter losses to IEC61800-9-2\*

Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	35.2 %

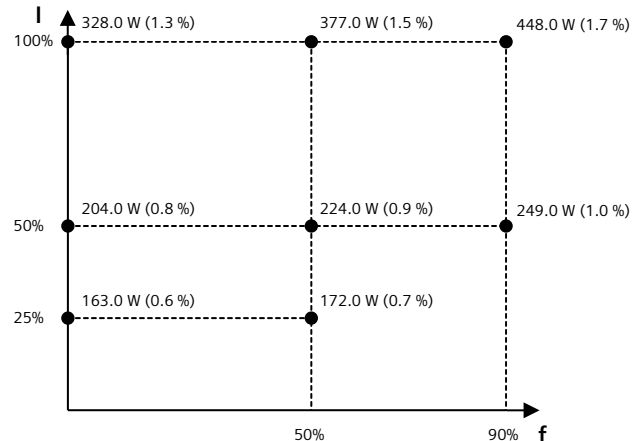

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

\*calculated values

<sup>1)</sup>The output current and HP ratings are valid for the voltage range 440V-480V