



LV HRC fuse element, NH2, In: 355 A, gG, Un AC: 500 V, Un DC: 440 V, Front indicator, live grip lugs

| Model  |                                     |
|--|-------------------------------------|
| product brand name   | SENTRON                             |
| product designation  | LV HRC fuse link                    |
| design of the product  | With blade contacts                 |
| design of an identification indicator  | Front indicators                    |
| design of the switching contact  | Non-corroding, silver-plated        |
| design of the fuse link  | LV HRC fuse link                    |
| General technical data   |                                     |
| size of fuse system according to EN 60269-1  | NH2                                 |
| operating class of the fuse link   | gG                                  |
| mounting type  | non-insulated grip lugs             |
| type of voltage of the operating voltage   | AC/DC                               |
| operational current at AC rated value  | 355 A                               |
| supply voltage   |                                     |
| • at AC  | 500 V                               |
| • at DC  | 440 V                               |
| Protection class   |                                     |
| protection class IP  | IP20, with connected conductors     |
| Breaking Capacity  |                                     |
| breaking capacity at AC according to IEC 60269 rated value                                 | 120 kA                              |
| breaking capacity at DC with time constant $\leq 10$ ms according to IEC 60269 rated value | 25 kA                               |
| Dissipation  |                                     |
| power loss [W]   | 26 W                                |
| power loss [W] for rated value of the current at AC in hot operating state per pole        | 26 W                                |
| Mechanical Design  |                                     |
| width of the enclosure   | 57.8 mm                             |
| mounting position  | Any, preferably vertical            |
| Net Weight   | 654 g                               |
| Environmental conditions   |                                     |
| ambient temperature during operation   |                                     |
| • minimum  | -5 °C                               |
| • maximum  | 40 °C                               |
| environmental category   | -20 to +50 at 95% relative humidity |
| environmental category during storage  | 90% at 20°C                         |
| Environmental footprint  |                                     |
| Environmental Product Declaration (EPD)  | Yes                                 |
| global warming potential [CO2 eq] total  | 48.6 kg                             |
| global warming potential [CO2 eq] during manufacturing                                     | 6 kg                                |

|   |           |
|---|-----------|
| global warming potential [CO2 eq] during operation  | 42.8 kg   |
| global warming potential [CO2 eq] after end of life | -0.352 kg |

#### Certificates

|   |    |
|---|----|
| reference code according to IEC 81346-2 | FC |
|---|----|

#### Approvals Certificates

|                          |                   |                      |
|--------------------------|-------------------|----------------------|
| General Product Approval | Test Certificates | Maritime application |
|--------------------------|-------------------|----------------------|



[Special Test Certificate](#)



|       |             |
|-------|-------------|
| other | Environment |
|-------|-------------|



[Confirmation](#)

[Miscellaneous](#)

[Environmental Confirmations](#)



[Environmental Confirmations](#)

#### Further information

##### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

##### Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NA3254>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3NA3254>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3NA3254](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NA3254)

##### CAX-Online-Generator


<http://www.siemens.com/cax>

##### Tender specifications

<http://www.siemens.com/specifications>

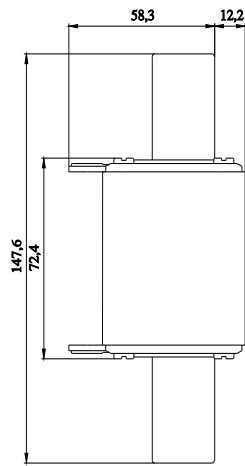

**-F**

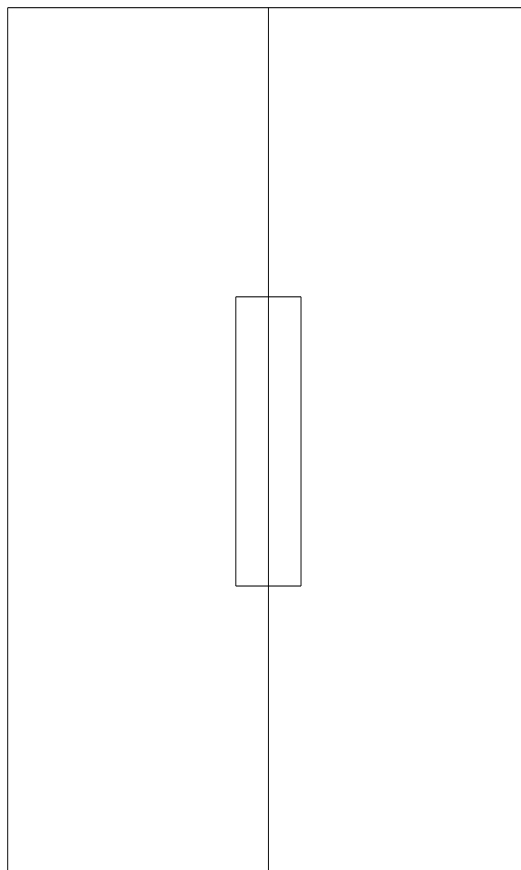

# FU



---

last modified:

5/1/2025 

