



contactor relay, 4 NO + 4 NC, 60 V DC, with varistor plugged on, screw terminal, frame size S00, removable auxiliary switch, basic device: 2 NO + 2 NC auxiliary switch: 2 NO + 2 NC

|  |                        |
|--|------------------------|
| product brand name   | SIRIUS                 |
| product designation  | Auxiliary contactor    |
| product type designation   | 3RH2                   |
| <b>General technical data</b>  |                        |
| size of contactor  | S00                    |
| product extension auxiliary switch   | No                     |
| power loss [W] for rated value of the current without load current share typical | 4 W                    |
| insulation voltage with degree of pollution 3 at AC rated value                  | 690 V                  |
| degree of pollution  | 3                      |
| surge voltage resistance rated value   | 6 kV                   |
| shock resistance at rectangular impulse  |                        |
| • at DC  | 10g / 5 ms, 5g / 10 ms |
| shock resistance with sine pulse   |                        |
| • at DC  | 15g / 5 ms, 8g / 10 ms |
| mechanical service life (operating cycles)                                       |                        |
| • of contactor typical   | 10 000 000             |
| reference code according to IEC 81346-2  | K                      |
| Substance Prohibition (Date)   | 07/01/2006             |
| SVHC substance name  | Lead - 7439-92-1       |
| Weight   | 0.347 kg               |
| <b>Ambient conditions</b>  |                        |
| installation altitude at height above sea level maximum                          | 2 000 m                |
| ambient temperature  |                        |
| • during operation   | -25 ... +60 °C         |
| • during storage   | -55 ... +80 °C         |
| relative humidity minimum  | 10 %                   |
| relative humidity at 55 °C according to IEC 60068-2-30 maximum                   | 95 %                   |
| <b>Environmental footprint</b>   |                        |
| Environmental Product Declaration (EPD)  | Yes                    |
| global warming potential [CO2 eq] total  | 133 kg                 |
| global warming potential [CO2 eq] during manufacturing                           | 1.57 kg                |
| global warming potential [CO2 eq] during operation                               | 132 kg                 |
| global warming potential [CO2 eq] after end of life                              | -0.2 kg                |
| <b>Main circuit</b>  |                        |
| no-load switching frequency  |                        |
| • at AC  | 10 000 1/h             |
| • at DC  | 10 000 1/h             |
| <b>Control circuit/ Control</b>  |                        |
| type of voltage of the control supply voltage                                    | DC                     |

|   |               |
|---|---------------|
| <b>control supply voltage at DC rated value</b>                                       | 60 V          |
| <b>operating range factor control supply voltage rated value of magnet coil at DC</b> |               |
| • initial value   | 0.8           |
| • full-scale value  | 1.1           |
| <b>design of the surge suppressor</b>   | Varistor      |
| <b>closing power of magnet coil at DC</b>   | 4 W           |
| <b>holding power of magnet coil at DC</b>   | 4 W           |
| <b>closing delay</b>  |               |
| • at DC   | 30 ... 100 ms |
| <b>opening delay</b>  |               |
| • at DC   | 7 ... 13 ms   |
| <b>arcing time</b>  | 10 ... 15 ms  |
| <b>Auxiliary circuit</b>  |               |
| <b>number of NC contacts for auxiliary contacts</b>                                   | 4             |
| • instantaneous contact   | 4             |
| <b>number of NO contacts for auxiliary contacts</b>                                   | 4             |
| • instantaneous contact   | 4             |
| <b>identification number and letter for switching elements</b>                        | 44 E          |
| operational current at AC-12 maximum  | 10 A          |
| <b>operational current at AC-15</b>   |               |
| • at 230 V rated value  | 6 A           |
| • at 400 V rated value  | 3 A           |
| • at 500 V rated value  | 2 A           |
| • at 690 V rated value  | 1 A           |
| <b>operational current at 1 current path at DC-12</b>                                 |               |
| • at 24 V rated value   | 10 A          |
| • at 110 V rated value  | 3 A           |
| • at 220 V rated value  | 1 A           |
| • at 440 V rated value  | 0.3 A         |
| • at 600 V rated value  | 0.15 A        |
| <b>operational current with 2 current paths in series at DC-12</b>                    |               |
| • at 24 V rated value   | 10 A          |
| • at 60 V rated value   | 10 A          |
| • at 110 V rated value  | 4 A           |
| • at 220 V rated value  | 2 A           |
| • at 440 V rated value  | 1.3 A         |
| • at 600 V rated value  | 0.65 A        |
| <b>operational current with 3 current paths in series at DC-12</b>                    |               |
| • at 24 V rated value   | 10 A          |
| • at 60 V rated value   | 10 A          |
| • at 110 V rated value  | 10 A          |
| • at 220 V rated value  | 3.6 A         |
| • at 440 V rated value  | 2.5 A         |
| • at 600 V rated value  | 1.8 A         |
| <b>operating frequency at DC-12 maximum</b>   | 1 000 1/h     |
| <b>operational current at 1 current path at DC-13</b>                                 |               |
| • at 24 V rated value   | 6 A           |
| • at 110 V rated value  | 1 A           |
| • at 220 V rated value  | 0.3 A         |
| • at 440 V rated value  | 0.14 A        |
| • at 600 V rated value  | 0.1 A         |
| <b>operational current with 2 current paths in series at DC-13</b>                    |               |
| • at 24 V rated value   | 10 A          |
| • at 60 V rated value   | 3.5 A         |
| • at 110 V rated value  | 1.3 A         |
| • at 220 V rated value  | 0.9 A         |
| • at 440 V rated value  | 0.2 A         |
| • at 600 V rated value  | 0.1 A         |
| <b>operational current with 3 current paths in series at DC-13</b>                    |               |
| • at 24 V rated value   | 10 A          |

|   |   |
|---|---|
| <ul style="list-style-type: none"> <li>• at 60 V rated value</li> <li>• at 110 V rated value</li> <li>• at 220 V rated value</li> <li>• at 440 V rated value</li> <li>• at 600 V rated value</li> </ul>   | 4.7 A<br>3 A<br>1.2 A<br>0.5 A<br>0.26 A  |
| <b>operating frequency at DC-13 maximum</b>   | 1 000 1/h   |
| <b>contact reliability of auxiliary contacts</b>  | 1 faulty switching per 100 million (17 V, 1 mA)   |
| <b>UL/CSA ratings</b>   |   |
| <b>contact rating of auxiliary contacts according to UL</b>   | A600 / Q600   |
| <b>Short-circuit protection</b>   |   |
| design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V   | C characteristic: 10 A; 0.4 kA  |
| design of the fuse link for short-circuit protection of the auxiliary switch required   | gG: 10 A (690 V, 1 kA)  |
| <b>Installation/ mounting/ dimensions</b>   |   |
| <b>mounting position</b>  | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface  |
| <b>fastening method</b>   | screw and snap-on mounting onto 35 mm DIN rail  |
| <b>height</b>   | 57.5 mm   |
| <b>width</b>  | 45 mm   |
| <b>depth</b>  | 117 mm  |
| <b>required spacing</b>   |   |
| <ul style="list-style-type: none"> <li>• with side-by-side mounting               <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts               <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— at the side</li> <li>— downwards</li> </ul> </li> <li>• for live parts               <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> </ul> | 10 mm<br>10 mm<br>10 mm<br>0 mm<br><br>10 mm<br>10 mm<br>6 mm<br>10 mm<br><br>10 mm<br>10 mm<br>10 mm<br>6 mm   |
| <b>Connections/ Terminals</b>   |   |
| type of electrical connection for auxiliary and control circuit   | screw-type terminals  |
| <b>type of connectable conductor cross-sections</b>   |   |
| <ul style="list-style-type: none"> <li>• for auxiliary contacts               <ul style="list-style-type: none"> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>• for AWG cables for auxiliary contacts</li> </ul>  | 2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> ), 2x 4 mm <sup>2</sup><br>2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )<br>2x (20 ... 16), 2x (18 ... 14), 2x 12 |
| <b>Safety related data</b>  |   |
| <b>product function</b>   |   |
| <ul style="list-style-type: none"> <li>• positively driven operation according to IEC 60947-5-1</li> <li>• suitable for safety function</li> </ul>  | Yes<br>Yes  |
| suitability for use safety-related switching OFF  | Yes   |
| <b>service life maximum</b>   | 20 a  |
| <b>proportion of dangerous failures</b>   |   |
| <ul style="list-style-type: none"> <li>• with low demand rate according to SN 31920</li> <li>• with high demand rate according to SN 31920</li> </ul>   | 40 %<br>73 %  |
| <b>B10 value with high demand rate according to SN 31920</b>  | 1 000 000; With 0.3 x I <sub>e</sub>  |
| <b>failure rate [FIT] with low demand rate according to SN 31920</b>  | 100 FIT   |
| <b>ISO 13849</b>  |   |
| <b>device type according to ISO 13849-1</b>   | 3   |
| <b>overdimensioning according to ISO 13849-2 necessary</b>  | Yes   |
| <b>IEC 61508</b>  |   |
| <b>safety device type according to IEC 61508-2</b>  | Type A  |
| <b>Electrical Safety</b>  |   |

protection class IP on the front according to IEC 60529 IP20

touch protection on the front according to IEC 60529 finger-safe, for vertical contact from the front

**Approvals Certificates**

General Product Approval EMV Test Certificates



[Special Test Certificate](#)

Test Certificates Maritime application

[Type Test Certificates/Test Report](#)



Maritime application other Railway Dangerous goods



[Miscellaneous](#)



[Confirmation](#)

[Special Test Certificate](#)

[Transport Information](#)




**Environment**




[Environmental Confirmations](#)

**Further information**

- Information on the packaging <https://support.industry.siemens.com/cs/ww/en/view/109813875>
- Information for data generation and storage <https://support.industry.siemens.com/cs/ww/en/view/109995012>
- Information- and Downloadcenter (Catalogs, Brochures,...) <https://www.siemens.com/ic10>
- Industry Mall (Online ordering system) <https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RH2344-1DE40-0KA0>
- Cax online generator <https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RH2344-1DE40-0KA0>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...) <https://support.industry.siemens.com/cs/ww/en/ps/3RH2344-1DE40-0KA0>
- Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) [https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RH2344-1DE40-0KA0&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RH2344-1DE40-0KA0&lang=en)
- Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current <https://support.industry.siemens.com/cs/ww/en/ps/3RH2344-1DE40-0KA0/char>
- Further characteristics (e.g. electrical endurance, switching frequency) <https://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RH2344-1DE40-0KA0&objecttype=14&gridview=view1>

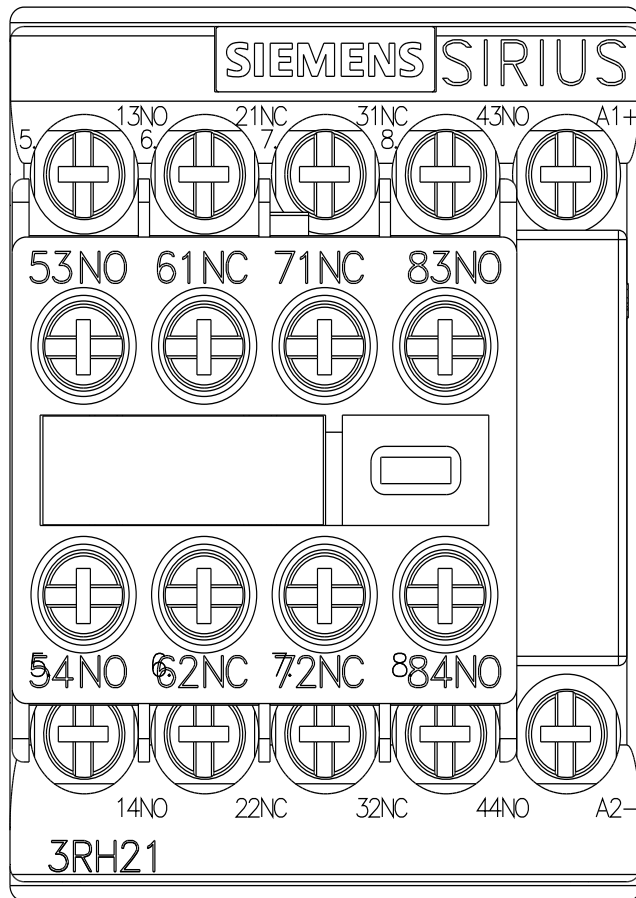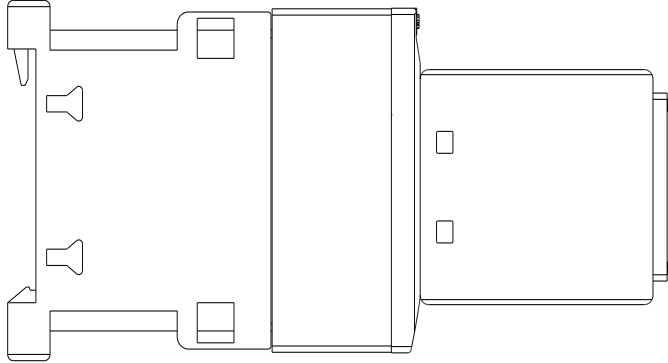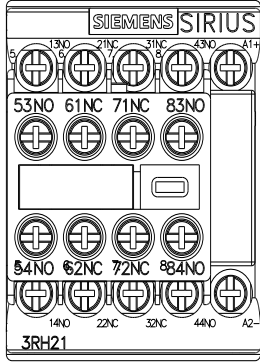

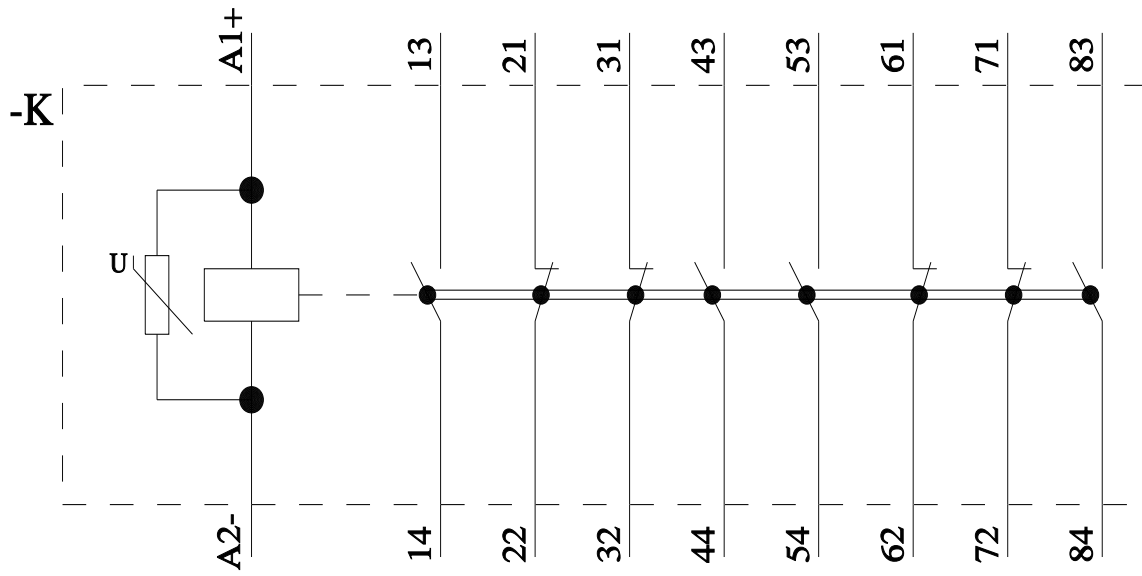

last modified:

9/5/2025 