

ECOFAST Energy TT clamping connector for feeder 6 mm<sup>2</sup> 2 x Q4/2 socket



product category	Miscellaneous accessories	
product designation	Power double-T terminal connector	
<b>General technical data</b>		
degree of pollution	3	
surge voltage resistance rated value	6 000 V	
protection class IP	IP65	
Substance Prohibition (Date)	05/01/2012	
Weight	0.441 kg	
operating voltage rated value maximum	690 V	
operational current at AC at 400 V rated value	40 A	
<b>Ambient conditions</b>		
ambient temperature during operation	-40 ... +125 °C	
<b>Installation/ mounting/ dimensions</b>		
height	55 mm	
width	107 mm	
length	158 mm	
<b>Approvals Certificates</b>		
General Product Approval	EMV	other



other	Environment
<a href="#">Confirmation</a>	<a href="#">Environmental Confirmations</a>

### Further information

Information on the packaging  
<https://support.industry.siemens.com/cs/ww/en/view/109813875>  
 Information for data generation and storage  
<https://support.industry.siemens.com/cs/ww/en/view/109995012>  
 Information- and Downloadcenter (Catalogs, Brochures,...)  
<https://www.siemens.com/ic10>  
 Industry Mall (Online ordering system)  
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1911-2BG02>  
 Cax online generator  
<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1911-2BG02>  
 Service&Support (Manuals, Certificates, Characteristics, FAQs,...)  
<https://support.industry.siemens.com/cs/ww/en/ps/3RK1911-2BG02>  
 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)  
[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RK1911-2BG02&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1911-2BG02&lang=en)

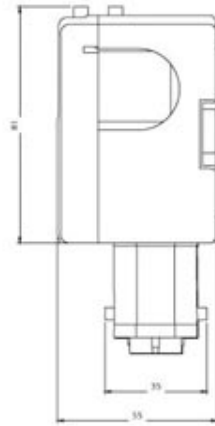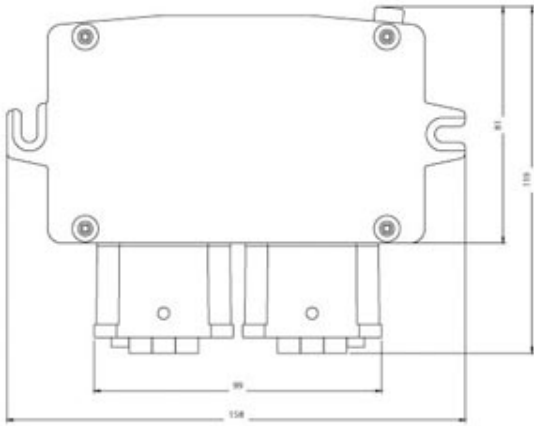

---

last modified:

4/2/2025