



AS-i SlimLine Compact module SC22.5 digital, A/B slave 4 DI/2 RQ, IP20 4 x inputs for 3-wire sensor Sensor supply can be switched over 2 x outlet relay 1 A DC 24 V spring-type terminals Overall width 22.5 mm

| | |
|--|--|
| product designation | Slimline Compact I/O module for use in the control cabinet |
| design of the product | AS-i SC22.5, 4DI/2RQ A/B |
| product type designation | 3RK2 |
| design of the slave type | A/B slave |
| AS-Interface slave profile | S-7.A.0 |
| ID1 code | 7; Factory setting, changeable |
| operating voltage according to AS-Interface specification | 18 ... 31.6 V |
| product function suitable for AS-i Power24V | Yes |
| consumed current from profile conductors of the AS-Interface | |
| • at 30 V maximum | 270 mA |
| • at 24 V with AS-i Power24V maximum | 270 mA |
| type of address setting of AS-i slaves | via front addressing socket |
| Substance Prohibitance (Date) | 05/01/2012 |
| SVHC substance name | Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol - 119-47-1 2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one - 71868-10-5 Diboron trioxide - 1303-86-2 |
| Weight | 0.229 kg |
| reference code | |
| • according to EN 61346-2 | K |
| • according to DIN 40719 extended according to IEC 204-2 according to IEC 750 | A |
| shock resistance | 15g / 11 ms (modules) or 10g / 11 ms (modules with device connector) |
| other information | Sensor supply via Uaux: Auxiliary feed 20 to 30 V DC required to supply the sensor. Sensor supply via AS-i: No additional power required. |
| Digital Inputs | |
| number of digital inputs | 4 |
| number of digital inputs safety-related | 0 |
| type of input characteristic | PNP Type 2 |
| type of connection technology | 2- and 3-wire technology |
| Sensor supply | |
| type of voltage supply for sensor supply | AS-Interface / U_AUX switchable |
| ampacity of the sensor supply for all inputs at ambient temperature 40 °C | 500 mA |
| • note | 200 mA with supply via AS interface / 500 mA with supply via Uaux |
| property of the sensor supply short-circuit and overload resistant | Yes |
| voltage drop at the sensor supply | |
| • from AS-interface | 8.5 V |
| • from external auxiliary voltage | 1 V |
| Digital Outputs | |

| | |
|--|---------------------|
| number of digital outputs | 2 |
| type of switching output | Relays, CO contacts |
| property of the output short-circuit proof | No |
| ampacity of the output relay at AC-15 at 230 V at 50/60 Hz | 3 A |
| ampacity of the output relay at DC-13 | |
| • at 24 V | 1 A |
| • at 110 V | 0.2 A |
| • at 230 V | 0.1 A |

Analog inputs

| | |
|-------------------------|---|
| number of analog inputs | 0 |
|-------------------------|---|

Analog outputs

| | |
|--------------------------|---|
| number of analog outputs | 0 |
|--------------------------|---|

Device connector

| | |
|---|-----|
| ampacity of the interface to the device connector | |
| • for AS-Interface | 2 A |
| • for external auxiliary voltage | 4 A |

Installation/ mounting/ dimensions

| | |
|------------------|----------------------------|
| fastening method | screw and snap-on mounting |
| height | 100 mm |
| width | 22.5 mm |
| depth | 120 mm |

Ambient conditions

| | |
|---------------------|----------------|
| ambient temperature | |
| • during operation | -25 ... +70 °C |
| • during storage | -40 ... +85 °C |

Connections/ Terminals

| | |
|---|--|
| type of electrical connection of the inputs and outputs | spring-loaded terminal (push-in) |
| type of connectable conductor cross-sections | |
| • solid | 1x (0.5 ... 1.5 mm ²), 2x (0.5 ... 1.5 mm ²) |
| • finely stranded with core end processing | 1x (0,25 ... 1,0 mm ²), 2x (0,25 ... 1,0 mm ²) |
| • finely stranded without core end processing | 1x (0.5 ... 1.5 mm ²), 2x (0.5 ... 1.5 mm ²) |
| • for AWG cables solid | 1x (20 ... 16), 2x (20 ... 16) |
| • for AWG cables stranded | 1x (20 ... 16), 2x (20 ... 16) |

Approvals Certificates

| | |
|--------------------------|-----|
| General Product Approval | EMV |
|--------------------------|-----|



Test Certificates

| | | | | | |
|--|-------------------------------|--|--|--|--|
| Type Test Certificates/Test Report | Miscellaneous | | | | |
|--|-------------------------------|--|--|--|--|

other

| | | | | |
|--|------------------------------|-------------------------------|---|--|
| | Confirmation | Miscellaneous | Environmental Confirmations | |
|--|------------------------------|-------------------------------|---|--|

Further information

Siemens is working on the renewal of the current EAC certificates.
Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).
Siemens has decided to exit the Russian market (see here).
<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK2402-2MG00-2AA2>

Cax online generator


<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK2402-2MG00-2AA2>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK2402-2MG00-2AA2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK2402-2MG00-2AA2&lang=en

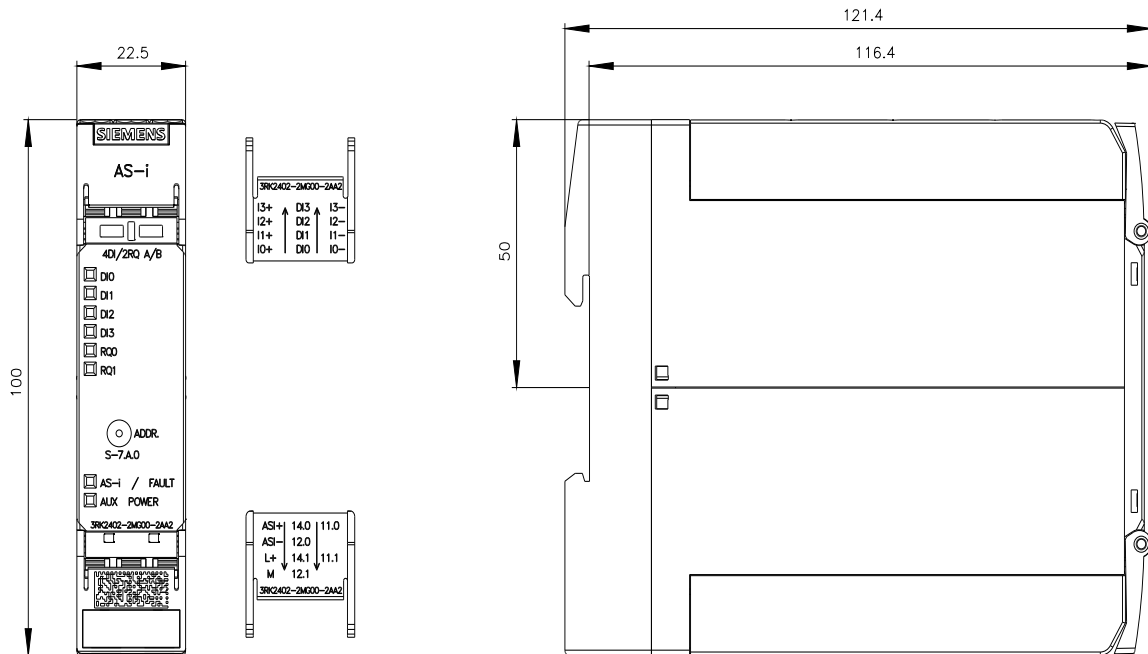

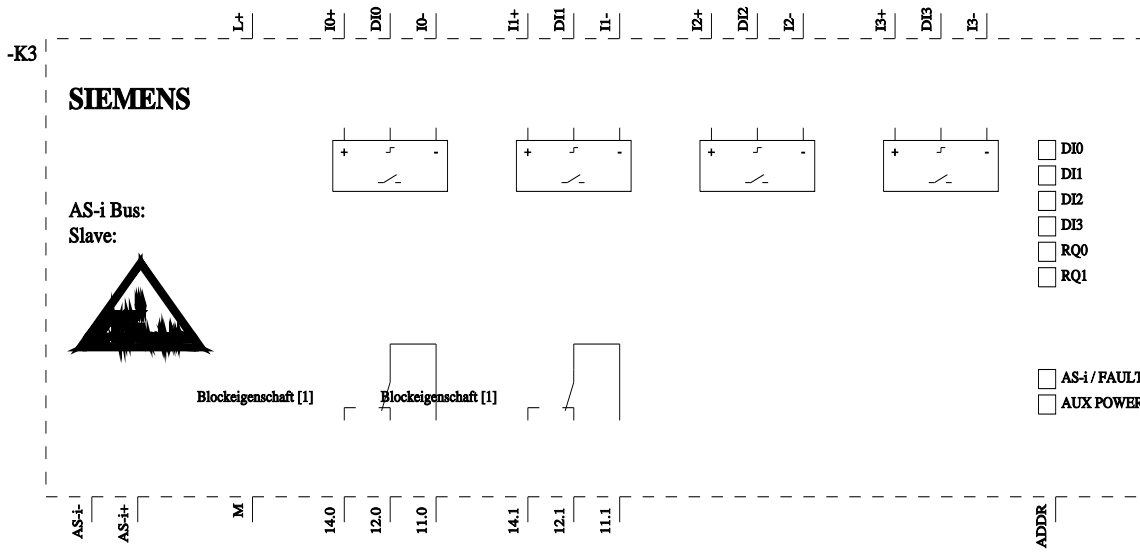

last modified:

4/2/2025