



Fail-safe direct starter, 3RM1, 500 V, 0.09 - 0.75 kW, 0.4 - 2 A, 24 V DC, screw terminals



|   |   |
|---|---|
| product brand name  | SIRIUS  |
| product category  | Motor starter   |
| product designation   | Fail-safe direct starter  |
| design of the product   | With electronic overload protection and safety-related disconnection  |
| product type designation  | 3RM1  |
| <b>General technical data</b>   |   |
| equipment version according to IEC 60947-4-2  | 3   |
| product function  | fail-safe direct starter  |
| <ul style="list-style-type: none"> <li>intrinsic device protection</li> </ul>                             | Yes   |
| <ul style="list-style-type: none"> <li>for power supply reverse polarity protection</li> </ul>            | Yes   |
| suitability for operation device connector 3ZY12  | Yes   |
| power loss [W] for rated value of the current   |   |
| <ul style="list-style-type: none"> <li>at AC in hot operating state per pole</li> </ul>                   | 0.1 W   |
| <ul style="list-style-type: none"> <li>without load current share typical</li> </ul>                      | 1.37 W  |
| insulation voltage rated value  | 500 V   |
| overvoltage category  | III   |
| surge voltage resistance rated value  | 6 kV  |
| maximum permissible voltage for protective separation   |   |
| <ul style="list-style-type: none"> <li>between main and auxiliary circuit</li> </ul>                      | 500 V   |
| <ul style="list-style-type: none"> <li>between control and auxiliary circuit</li> </ul>                   | 250 V   |
| shock resistance  | 6g / 11 ms  |
| vibration resistance  | 1 ... 6 Hz, 15 mm; 20 m/s <sup>2</sup> , 500 Hz   |
| operating frequency maximum   | 1 1/s   |
| reference code according to IEC 81346-2   | Q   |
| Substance Prohibitance (Date)   | 03/01/2017  |
| SVHC substance name   | Lead - 7439-92-1<br>Lead monoxide (lead oxide) - 1317-36-8<br>2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol - 79-94-7<br>6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol - 119-47-1 |
| Weight  | 0.302 kg  |
| product function  |   |
| <ul style="list-style-type: none"> <li>direct start</li> </ul>  | Yes   |
| <ul style="list-style-type: none"> <li>reverse starting</li> </ul>  | No  |
| product function short circuit protection   | No  |
| <b>Electromagnetic compatibility</b>  |   |
| EMC emitted interference according to IEC 60947-1   | class A   |
| EMC immunity according to IEC 60947-1   | Class A   |
| conducted interference  |   |
| <ul style="list-style-type: none"> <li>due to burst according to IEC 61000-4-4</li> </ul>                 | 3 kV / 5 kHz  |
| <ul style="list-style-type: none"> <li>due to conductor-earth surge according to IEC 61000-4-5</li> </ul> | 4 kV signal lines 2 kV  |
| <ul style="list-style-type: none"> <li>due to conductor-conductor surge according to IEC</li> </ul>       | 2 kV  |

|  |   |
|--|---|
| 61000-4-5  |   |
| <ul style="list-style-type: none"> <li>due to high-frequency radiation according to IEC 61000-4-6</li> </ul> | 10 V  |
| <b>field-based interference according to IEC 61000-4-3</b>   | 10 V/m  |
| <b>electrostatic discharge according to IEC 61000-4-2</b>  | 6 kV contact discharge / 8 kV air discharge                         |
| <b>conducted HF interference emissions according to CISPR11</b>  | Class B for the domestic, business and commercial environments      |
| <b>field-bound HF interference emission according to CISPR11</b>   | Class B for the domestic, business and commercial environments      |
| <b>Safety related data</b>   |   |
| <b>safe state</b>  | Load circuit open   |
| <b>function test interval maximum</b>  | 1 a   |
| <b>diagnostics test interval by internal test function maximum</b>   | 600 s   |
| <b>stop category according to IEC 60204-1</b>  | 0   |
| <b>B10d value</b>  | 2 500 000   |
| <b>failure rate [FIT] at rate of recognizable hazardous failures (<math>\lambda_{dd}</math>)</b>             | 1 400 FIT   |
| <b>failure rate [FIT] at rate of non-recognizable hazardous failures (<math>\lambda_{du}</math>)</b>         | 16 FIT  |
| <b>average diagnostic coverage level (DCavg)</b>   | 99 %  |
| <b>MTTFd</b>   | 75 a  |
| <b>IEC 62061</b>   |   |
| <b>Safety Integrity Level (SIL) according to IEC 62061</b>   | SIL 3   |
| PFHD with high demand rate according to IEC 62061  | 2E-8 1/h  |
| <b>ISO 13849</b>   |   |
| <b>performance level (PL) according to ISO 13849-1</b>   | PL e  |
| <b>IEC 61508</b>   |   |
| <b>Safety Integrity Level (SIL)</b>  |   |
| <ul style="list-style-type: none"> <li>according to IEC 61508</li> </ul>                                     | 3   |
| <b>safety device type according to IEC 61508-2</b>   | Type B  |
| PFDAvg with low demand rate according to IEC 61508   | 1.75E-5   |
| <b>Safe failure fraction (SFF)</b>   | 99.4 %  |
| hardware fault tolerance according to IEC 61508  | 1   |
| T1 value for proof test interval or service life according to IEC 61508                                      | 20 a  |
| <b>Electrical Safety</b>   |   |
| <b>protection class IP on the front according to IEC 60529</b>   | IP20  |
| <b>touch protection on the front according to IEC 60529</b>  | finger-safe   |
| <b>ATEX</b>  |   |
| <b>Safety Integrity Level (SIL) according to IEC 61508 relating to ATEX</b>                                  | SIL 2   |
| PFHD with high demand rate according to IEC 61508 relating to ATEX   | 5E-8 1/h  |
| PFDAvg with low demand rate according to IEC 61508 relating to ATEX  | 0.0005  |
| hardware fault tolerance according to IEC 61508 relating to ATEX   | 0   |
| T1 value for proof test interval or service life according to IEC 61508 relating to ATEX                     | 3 a   |
| certificate of suitability according to ATEX directive 2014/34/EU  | BVS 12 ATEX F 002 X   |
| <b>type of protection according to ATEX directive 2014/34/EU</b>   | II (2)G [Ex e] [Ex d] [Ex px], II (2)D [Ex t] [Ex p], I (M2) [Ex d] |
| <b>Main circuit</b>  |   |
| <b>number of poles for main current circuit</b>  | 3   |
| <b>design of the switching contact</b>   | Hybrid  |
| <b>adjustable current response value current of the current-dependent overload release</b>                   | 0.4 ... 2 A   |
| <b>minimum load [%]</b>  | 20 %; from set rated current  |
| <b>type of the motor protection</b>  | solid-state   |
| operating voltage rated value  | 48 ... 500 V  |
| <b>relative symmetrical tolerance of the operating voltage</b>   | 10 %  |
| <b>operating frequency 1 rated value</b>   | 50 Hz   |
| <b>operating frequency 2 rated value</b>   | 60 Hz   |
| <b>relative symmetrical tolerance of the operating frequency</b>   | 10 %  |
| <b>operational current</b>   |   |
| <ul style="list-style-type: none"> <li>at AC at 400 V rated value</li> </ul>                                 | 2 A   |

|   |   |
|---|---|
| <ul style="list-style-type: none"> <li>• at AC-3 at 400 V rated value</li> <li>• at AC-53a at 400 V at ambient temperature 40 °C rated value</li> </ul>   | 2 A<br>2 A  |
| <b>ampacity when starting maximum</b>   | 16 A  |
| operating power for 3-phase motors at 400 V at 50 Hz  | 0.09 ... 0.75 kW                                  |
| <b>Inputs/ Outputs</b>  |   |
| input voltage at digital input at DC rated value  | 24 V  |
| <b>input current at digital input</b>   |   |
| <ul style="list-style-type: none"> <li>• for signal &lt;1&gt; at DC</li> <li>• with signal &lt;0&gt; at DC</li> </ul>   | 8 mA<br>1 mA                                      |
| number of CO contacts for auxiliary contacts  | 1   |
| <b>operational current of auxiliary contacts at AC-15 at 230 V maximum</b>  | 3 A   |
| <b>operational current of auxiliary contacts at DC-13 at 24 V maximum</b>   | 1 A   |
| <b>Control circuit/ Control</b>   |   |
| <b>type of voltage of the control supply voltage</b>  | DC  |
| <b>control supply voltage at DC rated value</b>   | 19.2 ... 30 V                                     |
| <b>relative negative tolerance of the control supply voltage at DC</b>  | 20 %  |
| <b>relative positive tolerance of the control supply voltage at DC</b>  | 25 %  |
| <b>control supply voltage 1 at DC rated value</b>   | 24 V  |
| <b>operating range factor control supply voltage rated value at DC</b>  |   |
| <ul style="list-style-type: none"> <li>• initial value</li> <li>• full-scale value</li> </ul>   | 0.8<br>1.25                                       |
| <b>control current at DC</b>  |   |
| <ul style="list-style-type: none"> <li>• in standby mode of operation</li> <li>• during operation</li> </ul>  | 13 mA<br>57 mA                                    |
| <b>inrush current peak</b>  |   |
| <ul style="list-style-type: none"> <li>• at 24 V</li> <li>• at DC at 24 V</li> <li>• at DC at 24 V at switching on of motor</li> </ul>  | 0.28 A; values at 25 °C<br>300 mA<br>130 mA       |
| <b>duration of inrush current peak</b>  |   |
| <ul style="list-style-type: none"> <li>• at 24 V</li> <li>• at DC at 24 V</li> <li>• at DC at 24 V at switching on of motor</li> </ul>  | 85 ms<br>80 ms<br>20 ms                           |
| <b>power loss [W] in auxiliary and control circuit</b>  |   |
| <ul style="list-style-type: none"> <li>• <b>in switching state OFF</b> <ul style="list-style-type: none"> <li>— with bypass circuit</li> </ul> </li> <li>• <b>in switching state ON</b> <ul style="list-style-type: none"> <li>— with bypass circuit</li> </ul> </li> </ul> | 0.35 W<br>1.37 W                                  |
| <b>Response times</b>   |   |
| <b>ON-delay time</b>  | 65 ... 76 ms                                      |
| <b>OFF-delay time</b>   | 30 ... 43 ms                                      |
| <b>Power Electronics</b>  |   |
| <b>operational current</b>  |   |
| <ul style="list-style-type: none"> <li>• at 40 °C rated value</li> <li>• at 50 °C rated value</li> <li>• at 55 °C rated value</li> <li>• at 60 °C rated value</li> </ul>  | 2 A<br>2 A<br>2 A<br>2 A                          |
| <b>Installation/ mounting/ dimensions</b>   |   |
| <b>mounting position</b>  | vertical, horizontal, standing (observe derating) |
| <b>fastening method</b>   | screw and snap-on mounting onto 35 mm DIN rail    |
| <b>height</b>   | 100 mm  |
| <b>width</b>  | 22.5 mm   |
| <b>depth</b>  | 141.6 mm  |
| <b>required spacing</b>   |   |
| <ul style="list-style-type: none"> <li>• with side-by-side mounting <ul style="list-style-type: none"> <li>— forwards</li> <li>— backwards</li> </ul> </li> </ul>   | 0 mm<br>0 mm                                      |

|   |   |
|---|---|
| — upwards   | 50 mm   |
| — downwards   | 50 mm   |
| — at the side   | 0 mm  |
| ● for grounded parts  |   |
| — forwards  | 0 mm  |
| — backwards   | 0 mm  |
| — upwards   | 50 mm   |
| — at the side   | 3.5 mm  |
| — downwards   | 50 mm   |
| <b>Ambient conditions</b>   |   |
| installation altitude at height above sea level maximum           | 4 000 m; For derating see manual  |
| <b>ambient temperature</b>  |   |
| ● during operation  | -25 ... +60 °C  |
| ● during storage  | -40 ... +70 °C  |
| ● during transport  | -40 ... +70 °C  |
| environmental category during operation according to IEC 60721    | 3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 |
| relative humidity during operation                                | 10 ... 95 %   |
| air pressure according to SN 31205                                | 900 ... 1 060 hPa   |
| <b>Communication/ Protocol</b>                                    |   |
| <b>protocol is supported</b>                                      |   |
| ● PROFINET IO protocol  | No  |
| ● PROFI-safe protocol   | No  |
| <b>product function bus communication</b>                         | No  |
| protocol is supported AS-Interface protocol                       | No  |
| <b>Connections/ Terminals</b>                                     |   |
| <b>type of electrical connection</b>                              | screw-type terminals for main circuit, screw-type terminals for control circuit   |
| ● for main current circuit  | screw-type terminals  |
| ● for auxiliary and control circuit                               | screw-type terminals  |
| <b>wire length for motor unshielded maximum</b>                   | 100 m   |
| type of connectable conductor cross-sections for main contacts    |   |
| ● solid   | 1x (0,5 ... 4 mm <sup>2</sup> ), 2x (0,5 ... 2,5 mm <sup>2</sup> )  |
| ● finely stranded with core end processing                        | 1x (0,5 ... 4 mm <sup>2</sup> ), 2x (0,5 ... 1,5 mm <sup>2</sup> )  |
| <b>connectable conductor cross-section for main contacts</b>      |   |
| ● solid or stranded   | 0.5 ... 4 mm <sup>2</sup>   |
| ● finely stranded with core end processing                        | 0.5 ... 4 mm <sup>2</sup>   |
| <b>connectable conductor cross-section for auxiliary contacts</b> |   |
| ● solid or stranded   | 0.5 ... 2.5 mm <sup>2</sup>   |
| ● finely stranded with core end processing                        | 0.5 ... 2.5 mm <sup>2</sup>   |
| <b>type of connectable conductor cross-sections</b>               |   |
| ● for auxiliary contacts  |   |
| — solid   | 1x (0,5 ... 2,5 mm <sup>2</sup> ), 2x (1,0 ... 1,5 mm <sup>2</sup> )  |
| — finely stranded with core end processing                        | 1x (0,5 ... 2,5 mm <sup>2</sup> ), 2x (0,5 ... 1 mm <sup>2</sup> )  |
| ● for AWG cables for auxiliary contacts                           | 1x (20 ... 14), 2x (18 ... 16)  |
| <b>AWG number as coded connectable conductor cross section</b>    |   |
| ● for main contacts   | 20 ... 12   |
| ● for auxiliary contacts  | 20 ... 14   |
| <b>UL/CSA ratings</b>   |   |
| <b>yielded mechanical performance [hp]</b>                        |   |
| ● for single-phase AC motor                                       |   |
| — at 230 V rated value  | 0.125 hp  |
| ● for 3-phase AC motor  |   |
| — at 200/208 V rated value  | 0.333 hp  |
| — at 220/230 V rated value  | 0.333 hp  |
| — at 460/480 V rated value  | 0.75 hp   |
| <b>operational current at AC at 480 V according to UL 508</b>     | 2 A   |
| <b>Approvals Certificates</b>                                     |   |
| <b>General Product Approval</b>                                   | <b>EMV</b>  |



| For use in hazardous locations  | Functional Safety                            | Test Certificates                                  | other   |                              | Railway                                  |
|---|--|--|---|------------------------------|--|
|  | <a href="#">Type Examination Certificate</a> | <a href="#">Type Test Certificates/Test Report</a> |  | <a href="#">Confirmation</a> | <a href="#">Special Test Certificate</a> |

#### Environment

[Environmental Confirmations](#)

#### Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RM1102-1AA04>

Cax online generator



<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RM1102-1AA04>




Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RM1102-1AA04>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RM1102-1AA04&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RM1102-1AA04&lang=en)

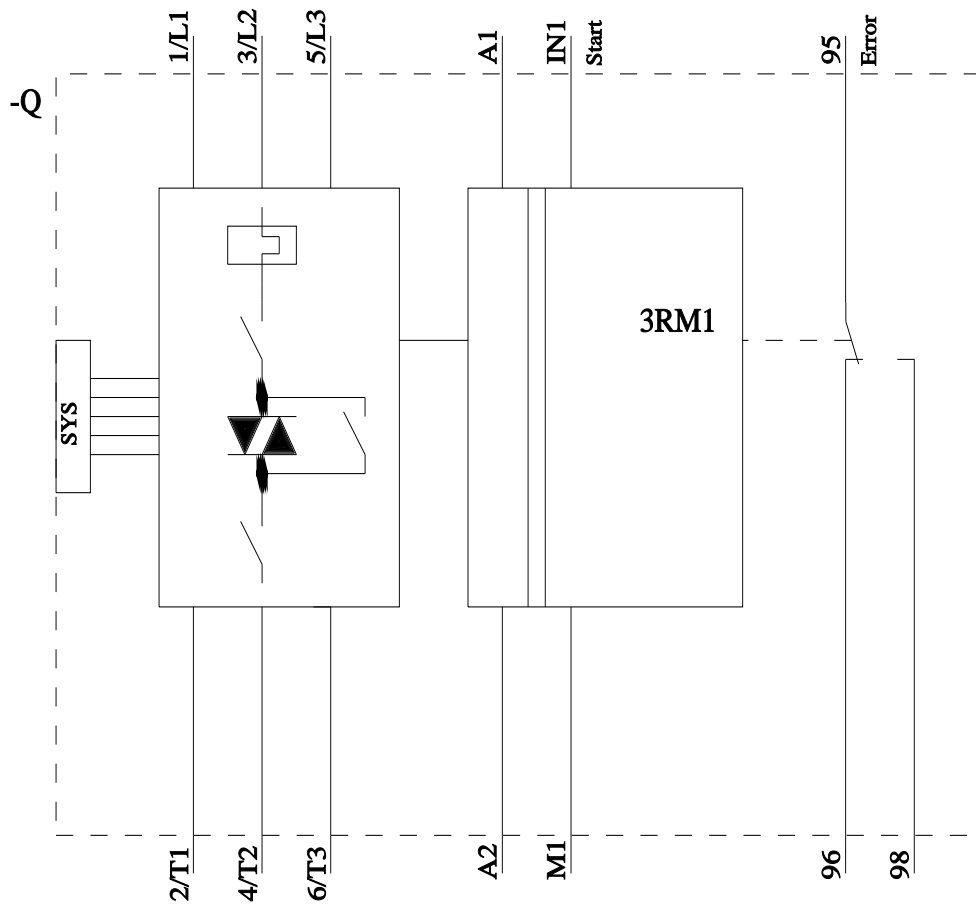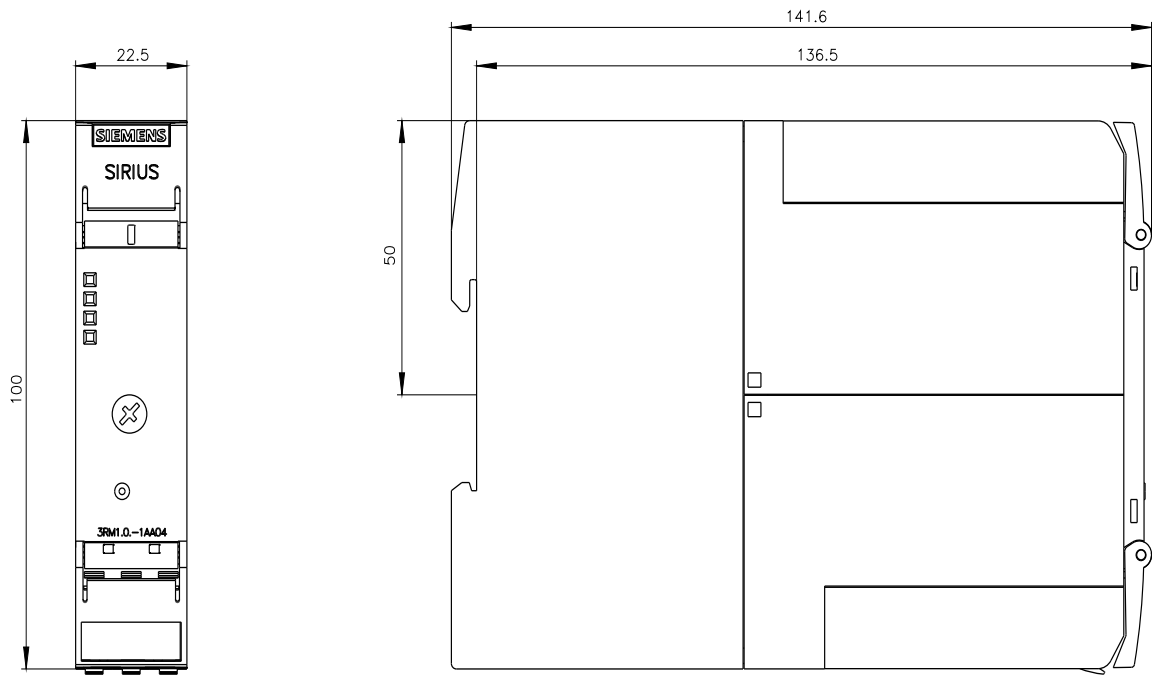

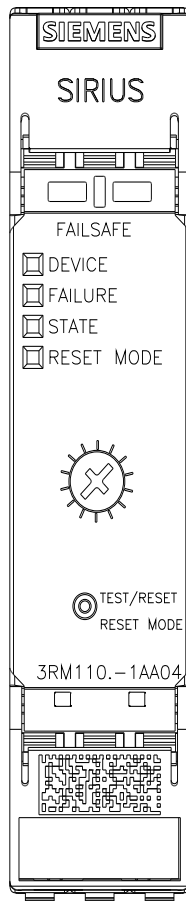

last modified:

9/5/2025 