



Timing relay, multifunction 1 changeover contact, 2 functions (B, K) 7 time ranges (0.05 s...100 h) 24 V AC/DC at 50/60 Hz AC With LED, screw terminal

product brand name	SIRIUS
product designation	timing relay
design of the product	2 functions (B, K)
product type designation	3RP25
General technical data	
product feature protective coating on printed-circuit board	No
adjustable time	0.05 s ... 100 h
Substance Prohibitance (Date)	09/12/2014
Weight	0.132 kg
Electromagnetic compatibility	
EMC emitted interference according to IEC 61812-1	ambience A (industrial sector)
EMC immunity according to IEC 61812-1	corresponds to degree of severity 3
Electrical Safety	
protection class IP on the front according to IEC 60529	IP20
Approvals Certificates	
General Product Approval	EMV



EMV	Test Certificates	Maritime application
KC	Type Test Certificates/Test Report	

Maritime application	other	Environment
		Confirmation Environmental Confirmations

Further information
Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875 Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RP2505-1AB30-0AC1>

Cax online generator


<https://support.automation.siemens.com/WW/CAxorder/default.aspx?lang=en&mlfb=3RP2505-1AB30-0AC1>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RP2505-1AB30-0AC1>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RP2505-1AB30-0AC1&lang=en

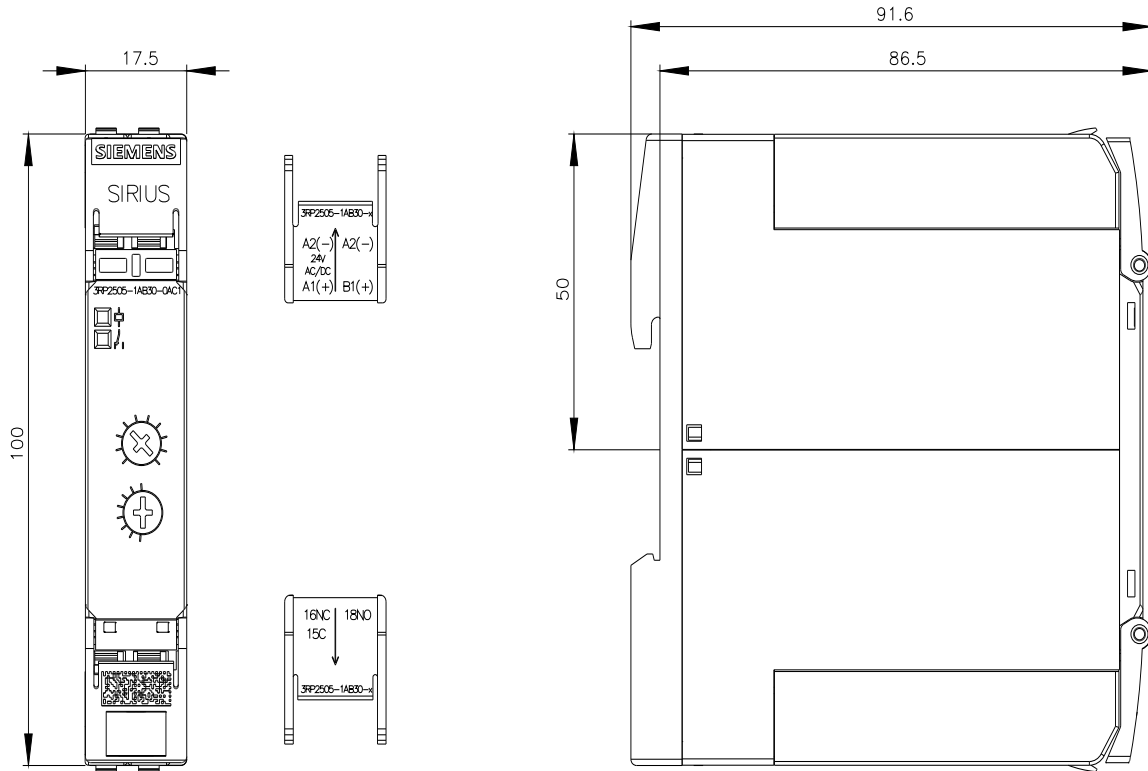

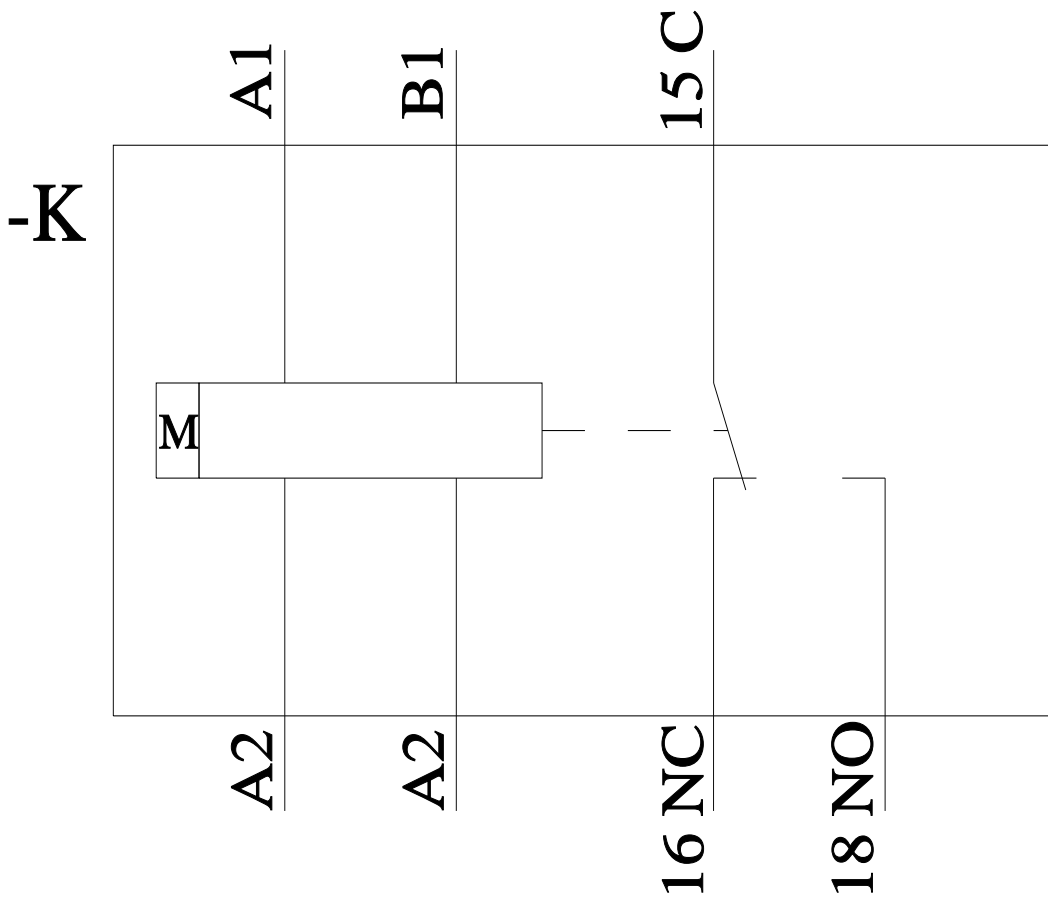

last modified:

9/5/2025 