



power contactor AC-1 690 A / 690 V / 40 °C 3-pole, U_c: 42-48 V AC(50-60 Hz) / DC drive: conventional auxiliary contacts 2 NO + 2 NC main circuit: busbar control and auxiliary circuit: screw terminal

| | |
|---|----------------------------|
| product brand name | SIRIUS |
| product designation | Contacteur |
| product type designation | 3RT14 |
| General technical data | |
| size of contactor | S12 |
| product extension | |
| • function module for communication | No |
| • auxiliary switch | Yes |
| power loss [W] for rated value of the current | |
| • at AC in hot operating state | 185.7 W |
| • at AC in hot operating state per pole | 61.9 W |
| • without load current share typical | 10 W |
| type of calculation of power loss depending on pole | quadratic |
| insulation voltage | |
| • of main circuit with degree of pollution 3 rated value | 1 000 V |
| • of auxiliary circuit with degree of pollution 3 rated value | 500 V |
| surge voltage resistance | |
| • of main circuit rated value | 8 kV |
| • of auxiliary circuit rated value | 6 kV |
| shock resistance at rectangular impulse | |
| • at AC | 8,5g / 5 ms, 4,2g / 10 ms |
| • at DC | 8,5g / 5 ms, 4,2g / 10 ms |
| shock resistance with sine pulse | |
| • at AC | 13,4g / 5 ms, 6,5g / 10 ms |
| • at DC | 13,4g / 5 ms, 6,5g / 10 ms |
| mechanical service life (operating cycles) | |
| • of contactor typical | 10 000 000 |
| • of the contactor with added electronically optimized auxiliary switch block typical | 5 000 000 |
| • of the contactor with added auxiliary switch block typical | 10 000 000 |
| reference code according to IEC 81346-2 | Q |
| Substance Prohibitance (Date) | 05/01/2012 |
| SVHC substance name | Lead - 7439-92-1 |
| Weight | 10.345 kg |
| Ambient conditions | |
| installation altitude at height above sea level maximum | 2 000 m |
| ambient temperature | |
| • during operation | -25 ... +60 °C |
| • during storage | -55 ... +80 °C |
| relative humidity minimum | 10 % |

| | |
|--|--|
| relative humidity at 55 °C according to IEC 60068-2-30 maximum | 95 % |
| Main circuit | |
| number of poles for main current circuit | 3 |
| number of NO contacts for main contacts | 3 |
| number of NC contacts for main contacts | 0 |
| type of voltage for main current circuit | AC |
| operational current | |
| <ul style="list-style-type: none"> ● at AC-1 <ul style="list-style-type: none"> — up to 690 V at ambient temperature 40 °C rated value — up to 690 V at ambient temperature 55 °C rated value — up to 690 V at ambient temperature 60 °C rated value ● at AC-3 <ul style="list-style-type: none"> — at 400 V rated value — at 690 V rated value | <p>690 A</p> <p>650 A</p> <p>650 A</p> <p>170 A</p> <p>170 A</p> |
| minimum cross-section in main circuit at maximum AC-1 rated value | 480 mm ² |
| operational current | |
| <ul style="list-style-type: none"> ● at 1 current path at DC-1 <ul style="list-style-type: none"> — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value ● with 2 current paths in series at DC-1 <ul style="list-style-type: none"> — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value ● with 3 current paths in series at DC-1 <ul style="list-style-type: none"> — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value ● at 1 current path at DC-3 at DC-5 <ul style="list-style-type: none"> — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value ● with 2 current paths in series at DC-3 at DC-5 <ul style="list-style-type: none"> — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value ● with 3 current paths in series at DC-3 at DC-5 <ul style="list-style-type: none"> — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value | <p>500 A</p> <p>500 A</p> <p>33 A</p> <p>3.8 A</p> <p>0.9 A</p> <p>0.6 A</p> <p>500 A</p> <p>500 A</p> <p>500 A</p> <p>500 A</p> <p>11 A</p> <p>5.2 A</p> <p>500 A</p> <p>11 A</p> <p>3 A</p> <p>0.6 A</p> <p>0.18 A</p> <p>0.125 A</p> <p>500 A</p> <p>500 A</p> <p>500 A</p> <p>2.5 A</p> <p>0.65 A</p> <p>0.37 A</p> <p>500 A</p> <p>500 A</p> <p>500 A</p> <p>500 A</p> <p>1.4 A</p> |

| | |
|---|------------------|
| — at 600 V rated value | 0.75 A |
| no-load switching frequency | |
| • at AC | 2 000 1/h |
| • at DC | 2 000 1/h |
| operating frequency at AC-1 maximum | 600 1/h |
| Control circuit/ Control | |
| type of voltage | AC/DC |
| type of voltage of the control supply voltage | AC/DC |
| control supply voltage at AC | |
| • at 50 Hz rated value | 42 ... 48 V |
| • at 60 Hz rated value | 42 ... 48 V |
| control supply voltage at DC rated value | 42 ... 48 V |
| operating range factor control supply voltage rated value of magnet coil at DC | |
| • initial value | 0.8 |
| • full-scale value | 1.1 |
| operating range factor control supply voltage rated value of magnet coil at AC | |
| • at 50 Hz | 0.8 ... 1.1 |
| • at 60 Hz | 0.8 ... 1.1 |
| design of the surge suppressor | with varistor |
| apparent pick-up power | |
| • at minimum rated control supply voltage at AC | |
| — at 50 Hz | 700 VA |
| — at 60 Hz | 700 VA |
| • at maximum rated control supply voltage at AC | |
| — at 60 Hz | 830 VA |
| — at 50 Hz | 830 VA |
| apparent pick-up power of magnet coil at AC | |
| • at 50 Hz | 830 VA |
| inductive power factor with closing power of the coil | |
| • at 50 Hz | 0.9 |
| apparent holding power | |
| • at minimum rated control supply voltage at DC | 8.5 VA |
| • at maximum rated control supply voltage at DC | 10 VA |
| apparent holding power | |
| • at minimum rated control supply voltage at AC | |
| — at 50 Hz | 7.6 VA |
| — at 60 Hz | 7.6 VA |
| • at maximum rated control supply voltage at AC | |
| — at 50 Hz | 9.2 VA |
| — at 60 Hz | 9.2 VA |
| apparent holding power of magnet coil at AC | |
| • at 50 Hz | 9.2 VA |
| inductive power factor with the holding power of the coil | |
| • at 50 Hz | 0.9 |
| closing power of magnet coil at DC | 920 W |
| holding power of magnet coil at DC | 10 W |
| closing delay | |
| • at AC | 45 ... 100 ms |
| • at DC | 45 ... 100 ms |
| opening delay | |
| • at AC | 60 ... 100 ms |
| • at DC | 60 ... 100 ms |
| arcing time | 10 ... 15 ms |
| control version of the switch operating mechanism | Standard A1 - A2 |
| Auxiliary circuit | |
| number of NC contacts for auxiliary contacts | 2 |
| • attachable | 4 |
| • instantaneous contact | 2 |
| number of NO contacts for auxiliary contacts | 2 |

| | |
|--|--|
| <ul style="list-style-type: none"> • attachable | 4 |
| <ul style="list-style-type: none"> • instantaneous contact | 2 |
| operational current at AC-12 maximum | 10 A |
| operational current at AC-15 | |
| <ul style="list-style-type: none"> • at 230 V rated value | 6 A |
| <ul style="list-style-type: none"> • at 400 V rated value | 3 A |
| <ul style="list-style-type: none"> • at 500 V rated value | 2 A |
| <ul style="list-style-type: none"> • at 690 V rated value | 1 A |
| operational current at DC-13 | |
| <ul style="list-style-type: none"> • at 24 V rated value | 10 A |
| <ul style="list-style-type: none"> • at 48 V rated value | 2 A |
| <ul style="list-style-type: none"> • at 60 V rated value | 2 A |
| <ul style="list-style-type: none"> • at 110 V rated value | 1 A |
| <ul style="list-style-type: none"> • at 125 V rated value | 0.9 A |
| <ul style="list-style-type: none"> • at 220 V rated value | 0.3 A |
| <ul style="list-style-type: none"> • at 600 V rated value | 0.1 A |
| contact reliability of auxiliary contacts | 1 faulty switching per 100 million (17 V, 1 mA) |
| Short-circuit protection | |
| design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V | C characteristic: 10 A; 0.4 kA |
| design of the fuse link | |
| <ul style="list-style-type: none"> • for short-circuit protection of the main circuit <ul style="list-style-type: none"> — with type of coordination 1 required — with type of coordination 2 required | gG: 800 A (690 V, 50 kA) gR: 710 A (690 V, 100 kA) |
| <ul style="list-style-type: none"> • for short-circuit protection of the auxiliary switch required | gG: 10 A (500 V, 1 kA) |
| Installation/ mounting/ dimensions | |
| mounting position | with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back |
| fastening method side-by-side mounting | Yes |
| fastening method | screw fixing |
| height | 214 mm |
| width | 160 mm |
| depth | 225 mm |
| required spacing | |
| <ul style="list-style-type: none"> • with side-by-side mounting <ul style="list-style-type: none"> — forwards — upwards — downwards — at the side | 20 mm 10 mm 10 mm 0 mm |
| <ul style="list-style-type: none"> • for grounded parts <ul style="list-style-type: none"> — forwards — upwards — at the side — downwards | 20 mm 10 mm 10 mm 10 mm |
| <ul style="list-style-type: none"> • for live parts <ul style="list-style-type: none"> — forwards — upwards — downwards — at the side | 20 mm 10 mm 10 mm 10 mm |
| Connections/ Terminals | |
| type of electrical connection | |
| <ul style="list-style-type: none"> • for main current circuit | Connection bar |
| <ul style="list-style-type: none"> • for auxiliary and control circuit | screw-type terminals |
| <ul style="list-style-type: none"> • at contactor for auxiliary contacts | Screw-type terminals |
| <ul style="list-style-type: none"> • of magnet coil | Screw-type terminals |
| width of connection bar | 25 mm |
| thickness of connection bar | 6 mm |
| diameter of holes | 11 mm |
| number of holes | 1 |
| type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> • for AWG cables for main contacts | 2/0 ... 500 kcmil |

| | |
|---|--|
| connectable conductor cross-section for main contacts | |
| <ul style="list-style-type: none"> • solid or stranded • stranded | 70 ... 240 mm ² 70 ... 240 mm ² |
| connectable conductor cross-section for auxiliary contacts | |
| <ul style="list-style-type: none"> • solid or stranded • finely stranded with core end processing | 0.5 ... 4 mm ² 0.5 ... 2.5 mm ² |
| type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> • for auxiliary contacts <ul style="list-style-type: none"> — solid — solid or stranded — finely stranded with core end processing • for AWG cables for auxiliary contacts | 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²), max. 2x (0.75 ... 4 mm ²) 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²), max. 2x (0.75 ... 4 mm ²) 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²) 2x (20 ... 16), 2x (18 ... 14), 1x 12 |
| AWG number as coded connectable conductor cross section for auxiliary contacts | 18 ... 14 |

Safety related data

| | |
|---|-----------|
| product function | |
| <ul style="list-style-type: none"> • mirror contact according to IEC 60947-4-1 • positively driven operation according to IEC 60947-5-1 | Yes No |
| suitability for use safety-related switching OFF | No |
| service life maximum | 20 a |

Electrical Safety

| | |
|--|--|
| protection class IP on the front according to IEC 60529 | IP00; IP20 with box terminal/cover |
| touch protection on the front according to IEC 60529 | finger-safe, for vertical contact from the front with box terminal/cover |

Approvals Certificates

| | |
|---------------------------------|-----|
| General Product Approval | EMV |
|---------------------------------|-----|



| | | |
|--------------------------|--------------------------|-----------------------------|
| Functional Safety | Test Certificates | Maritime application |
|--------------------------|--------------------------|-----------------------------|

[Type Examination Certificate](#)

[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



| | |
|-----------------------------|--------------|
| Maritime application | other |
|-----------------------------|--------------|



[Confirmation](#)

[Confirmation](#)

[Miscellaneous](#)

| | |
|----------------|--------------------|
| Railway | Environment |
|----------------|--------------------|

[Special Test Certificate](#)

[Environmental Confirmations](#)

Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
Information for data generation and storage
<https://support.industry.siemens.com/cs/ww/en/view/109995012>
Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/ic10>
Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1476-6AD36>
Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1476-6AD36>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1476-6AD36>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1476-6AD36&lang=en

Characteristic: Tripping characteristics, I²t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1476-6AD36/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<https://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT1476-6AD36&objecttype=14&gridview=view1>

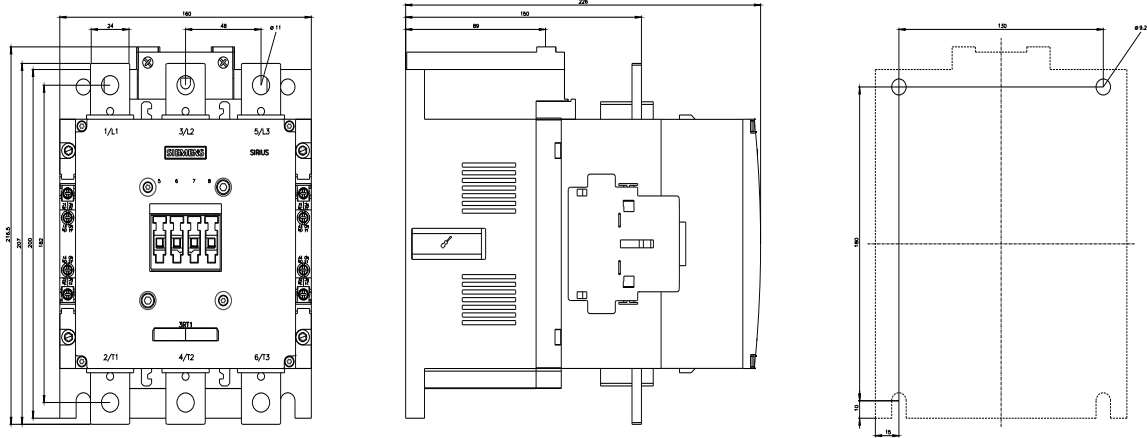



last modified:

4/10/2025 