



contactor AC-1, 60 A, 400 V / 40 °C, 4-pole, 48 V AC, 50/60 Hz, auxiliary contacts: 1 NO + 1 NC, screw terminal, size: S2

|   |                             |
|---|-----------------------------|
| <b>product brand name</b>   | SIRIUS                      |
| <b>product designation</b>  | Contacteur                  |
| <b>product type designation</b>   | 3RT23                       |
| <b>General technical data</b>   |                             |
| <b>size of contactor</b>  | S2                          |
| <b>product extension</b>  |                             |
| • function module for communication   | No                          |
| • auxiliary switch  | Yes                         |
| <b>power loss [W] for rated value of the current</b>                          |                             |
| • at AC in hot operating state  | 12.8 W                      |
| • at AC in hot operating state per pole                                       | 3.2 W                       |
| • without load current share typical  | 6.4 W                       |
| <b>type of calculation of power loss depending on pole</b>                    | quadratic                   |
| <b>insulation voltage</b>   |                             |
| • of main circuit with degree of pollution 3 rated value                      | 690 V                       |
| • of the auxiliary and control circuit with degree of pollution 3 rated value | 690 V                       |
| <b>surge voltage resistance</b>   |                             |
| • of main circuit rated value   | 6 kV                        |
| • of auxiliary circuit rated value  | 6 kV                        |
| <b>shock resistance at rectangular impulse</b>                                |                             |
| • at AC   | 11.8g / 5 ms, 7.4g / 10 ms  |
| <b>shock resistance with sine pulse</b>                                       |                             |
| • at AC   | 18.5g / 5 ms, 11.6g / 10 ms |
| <b>mechanical service life (operating cycles)</b>                             |                             |
| • of contactor typical  | 10 000 000                  |
| • of the contactor with added auxiliary switch block typical                  | 10 000 000                  |
| <b>reference code according to IEC 81346-2</b>                                | Q                           |
| <b>Substance Prohibitance (Date)</b>  | 10/01/2014                  |
| <b>Weight</b>   | 1.135 kg                    |
| <b>Ambient conditions</b>   |                             |
| installation altitude at height above sea level maximum                       | 2 000 m                     |
| <b>ambient temperature</b>  |                             |
| • during operation  | -25 ... +60 °C              |
| • during storage  | -55 ... +80 °C              |
| <b>relative humidity minimum</b>  | 10 %                        |
| <b>relative humidity at 55 °C according to IEC 60068-2-30 maximum</b>         | 95 %                        |
| <b>Environmental footprint</b>  |                             |
| Environmental Product Declaration (EPD)                                       | Yes                         |
| global warming potential [CO <sub>2</sub> eq] total                           | 302 kg                      |

|  |  |
|--|--|
| global warming potential [CO2 eq] during manufacturing   | 4.83 kg  |
| global warming potential [CO2 eq] during operation   | 297 kg   |
| global warming potential [CO2 eq] after end of life  | -0.64 kg   |
| <b>Main circuit</b>  |  |
| <b>number of poles for main current circuit</b>  | 4  |
| <b>number of NO contacts for main contacts</b>   | 4  |
| <b>type of voltage for main current circuit</b>  | AC   |
| <b>operational current</b>   |  |
| <ul style="list-style-type: none"> <li>● at AC-1 at 400 V at ambient temperature 40 °C rated value</li> </ul>  | 60 A   |
| <ul style="list-style-type: none"> <li>● at AC-1 <ul style="list-style-type: none"> <li>— up to 690 V at ambient temperature 40 °C rated value</li> <li>— up to 690 V at ambient temperature 60 °C rated value</li> </ul> </li> </ul>  | 60 A<br>55 A   |
| <ul style="list-style-type: none"> <li>● at AC-3 <ul style="list-style-type: none"> <li>— at 400 V rated value</li> </ul> </li> </ul>  | 38 A   |
| minimum cross-section in main circuit at maximum AC-1 rated value  | 16 mm <sup>2</sup>   |
| <b>operational current</b>   |  |
| <ul style="list-style-type: none"> <li>● <b>at 1 current path at DC-1</b> <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 60 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> </ul> </li> <li>● <b>with 2 current paths in series at DC-1</b> <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 60 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> </ul> </li> <li>● <b>with 3 current paths in series at DC-1</b> <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 60 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> </ul> </li> <li>● <b>at 1 current path at DC-3 at DC-5</b> <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 60 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> </ul> </li> <li>● <b>with 2 current paths in series at DC-3 at DC-5</b> <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 60 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> </ul> </li> <li>● <b>with 3 current paths in series at DC-3 at DC-5</b> <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 60 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> </ul> </li> </ul> | 55 A<br>23 A<br>4.5 A<br>1 A<br>0.4 A<br><br>55 A<br>55 A<br>45 A<br>5 A<br>1 A<br><br>55 A<br>55 A<br>55 A<br>45 A<br>2.9 A<br><br>20 A<br>5 A<br>2.5 A<br>1 A<br>0.1 A<br><br>45 A<br>45 A<br>25 A<br>5 A<br>0.27 A<br><br>45 A<br>45 A<br>45 A<br>25 A<br>0.6 A |
| <b>no-load switching frequency</b>   |  |
| <ul style="list-style-type: none"> <li>● at AC</li> </ul>  | 5 000 1/h  |
| operating frequency at AC-1 maximum  | 700 1/h  |
| <b>Control circuit/ Control</b>  |  |
| <b>type of voltage</b>   | AC   |
| <b>type of voltage of the control supply voltage</b>   | AC   |

|   |   |
|---|---|
| <b>control supply voltage at AC</b>   |   |
| • at 50 Hz rated value  | 48 V  |
| • at 60 Hz rated value  | 48 V  |
| <b>operating range factor control supply voltage rated value of magnet coil at AC</b>                     |   |
| • at 50 Hz  | 0.8 ... 1.1                                     |
| • at 60 Hz  | 0.85 ... 1.1                                    |
| <b>apparent pick-up power of magnet coil at AC</b>  |   |
| • at 50 Hz  | 210 VA  |
| • at 60 Hz  | 188 VA  |
| <b>inductive power factor with closing power of the coil</b>  |   |
| • at 50 Hz  | 0.69  |
| • at 60 Hz  | 0.65  |
| <b>apparent holding power of magnet coil at AC</b>  |   |
| • at 50 Hz  | 17.2 VA   |
| • at 60 Hz  | 16.5 VA   |
| <b>inductive power factor with the holding power of the coil</b>  |   |
| • at 50 Hz  | 0.36  |
| • at 60 Hz  | 0.39  |
| <b>closing delay</b>  |   |
| • at AC   | 10 ... 80 ms                                    |
| <b>opening delay</b>  |   |
| • at AC   | 10 ... 18 ms                                    |
| <b>arcing time</b>  | 10 ... 20 ms                                    |
| <b>control version of the switch operating mechanism</b>  | Standard A1 - A2                                |
| <b>Auxiliary circuit</b>  |   |
| <b>number of NC contacts for auxiliary contacts</b>   | 1   |
| • attachable  | 2   |
| • instantaneous contact   | 1   |
| <b>number of NO contacts for auxiliary contacts</b>   | 1   |
| • attachable  | 2   |
| • instantaneous contact   | 1   |
| operational current at AC-12 maximum  | 10 A  |
| <b>operational current at AC-15</b>   |   |
| • at 230 V rated value  | 10 A  |
| • at 400 V rated value  | 3 A   |
| • at 500 V rated value  | 2 A   |
| • at 690 V rated value  | 1 A   |
| <b>operational current at DC-12</b>   |   |
| • at 24 V rated value   | 10 A  |
| • at 48 V rated value   | 6 A   |
| • at 60 V rated value   | 6 A   |
| • at 110 V rated value  | 3 A   |
| • at 125 V rated value  | 2 A   |
| • at 220 V rated value  | 1 A   |
| • at 600 V rated value  | 0.15 A  |
| <b>operational current at DC-13</b>   |   |
| • at 24 V rated value   | 10 A  |
| • at 48 V rated value   | 2 A   |
| • at 110 V rated value  | 1 A   |
| • at 125 V rated value  | 0.9 A   |
| • at 220 V rated value  | 0.3 A   |
| • at 600 V rated value  | 0.1 A   |
| <b>contact reliability of auxiliary contacts</b>  | 1 faulty switching per 100 million (17 V, 1 mA) |
| <b>UL/CSA ratings</b>   |   |
| <b>contact rating of auxiliary contacts according to UL</b>   | A600 / P600                                     |
| <b>Short-circuit protection</b>   |   |
| design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V | C characteristic: 10 A; 0.4 kA                  |
| <b>design of the fuse link</b>  |   |
| • for short-circuit protection of the main circuit  |   |

|   |   |
|---|---|
| <ul style="list-style-type: none"> <li>— with type of coordination 1 required</li> <li>— with type of coordination 2 required</li> <li>● for short-circuit protection of the auxiliary switch required</li> </ul>   | gG: 160 A (690 V, 100 kA)<br>gG: 63 A (690 V, 100 kA)<br>gG: 10 A (690 V, 1 kA)   |
| <b>Installation/ mounting/ dimensions</b>   |   |
| <b>mounting position</b>  | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface  |
| fastening method side-by-side mounting  | Yes   |
| <b>fastening method</b>   | screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715  |
| <b>height</b>   | 114 mm  |
| <b>width</b>  | 75 mm   |
| <b>depth</b>  | 130 mm  |
| <b>required spacing</b>   |   |
| <ul style="list-style-type: none"> <li>● with side-by-side mounting               <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> <li>● for grounded parts               <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— at the side</li> <li>— downwards</li> </ul> </li> <li>● for live parts               <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> </ul> | 10 mm<br>10 mm<br>10 mm<br>0 mm<br><br>10 mm<br>10 mm<br>6 mm<br>10 mm<br><br>10 mm<br>10 mm<br>10 mm<br>6 mm   |
| <b>Connections/ Terminals</b>   |   |
| <b>type of electrical connection</b>  |   |
| <ul style="list-style-type: none"> <li>● for main current circuit</li> <li>● for auxiliary and control circuit</li> <li>● at contactor for auxiliary contacts</li> <li>● of magnet coil</li> </ul>  | screw-type terminals<br>screw-type terminals<br>Screw-type terminals<br>Screw-type terminals  |
| <b>type of connectable conductor cross-sections</b>   |   |
| <ul style="list-style-type: none"> <li>● for main contacts               <ul style="list-style-type: none"> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>● for AWG cables for main contacts</li> </ul>  | 2x (1 ... 35 mm <sup>2</sup> ), 1x (1 ... 50 mm <sup>2</sup> )<br>2x (1 ... 25 mm <sup>2</sup> ), 1x (1 ... 35 mm <sup>2</sup> )<br>2x (18 ... 2), 1x (18 ... 1)  |
| <b>connectable conductor cross-section for main contacts</b>  |   |
| <ul style="list-style-type: none"> <li>● solid or stranded</li> <li>● finely stranded with core end processing</li> </ul>   | 1 ... 50 mm <sup>2</sup><br>1 ... 35 mm <sup>2</sup>  |
| <b>connectable conductor cross-section for auxiliary contacts</b>   |   |
| <ul style="list-style-type: none"> <li>● solid or stranded</li> <li>● finely stranded with core end processing</li> <li>● finely stranded without core end processing</li> </ul>  | 0.5 ... 2.5 mm <sup>2</sup><br>0.5 ... 2.5 mm <sup>2</sup><br>0.5 ... 2.5 mm <sup>2</sup>   |
| <b>type of connectable conductor cross-sections</b>   |   |
| <ul style="list-style-type: none"> <li>● for auxiliary contacts               <ul style="list-style-type: none"> <li>— solid</li> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>● for AWG cables for auxiliary contacts</li> </ul>   | 2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )<br>2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )<br>2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )<br>2x (20 ... 16), 2x (18 ... 14) |
| <b>AWG number as coded connectable conductor cross section for main contacts</b>  | 18 ... 1  |
| <b>AWG number as coded connectable conductor cross section for auxiliary contacts</b>   | 20 ... 14   |
| <b>Safety related data</b>  |   |
| <b>product function</b>   |   |
| <ul style="list-style-type: none"> <li>● mirror contact according to IEC 60947-4-1</li> <li>● positively driven operation according to IEC 60947-5-1</li> </ul>   | Yes<br>No   |
| <b>Electrical Safety</b>  |   |
| <b>protection class IP on the front according to IEC 60529</b>  | IP20  |

|  |  |
|--|--|
| touch protection on the front according to IEC 60529 | finger-safe, for vertical contact from the front |
|--|--|

**Communication/ Protocol**

|                                    |    |
|------------------------------------|----|
| product function bus communication | No |
|------------------------------------|----|

**Approvals Certificates**

**General Product Approval**



[KC](#)



|     |                   |                      |
|-----|-------------------|----------------------|
| EMV | Test Certificates | Maritime application |
|-----|-------------------|----------------------|



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



|                      |       |         |
|----------------------|-------|---------|
| Maritime application | other | Railway |
|----------------------|-------|---------|



[Confirmation](#)

[Special Test Certificate](#)

|                 |             |
|-----------------|-------------|
| Dangerous goods | Environment |
|-----------------|-------------|

[Transport Information](#)



[Environmental Confirmations](#)

**Further information**

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2336-1AH20>

Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2336-1AH20>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2336-1AH20>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)





[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT2336-1AH20&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2336-1AH20&lang=en)

Characteristic: Tripping characteristics, I<sub>t</sub>, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2336-1AH20/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<https://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2336-1AH20&objectype=14&gridview=view1>

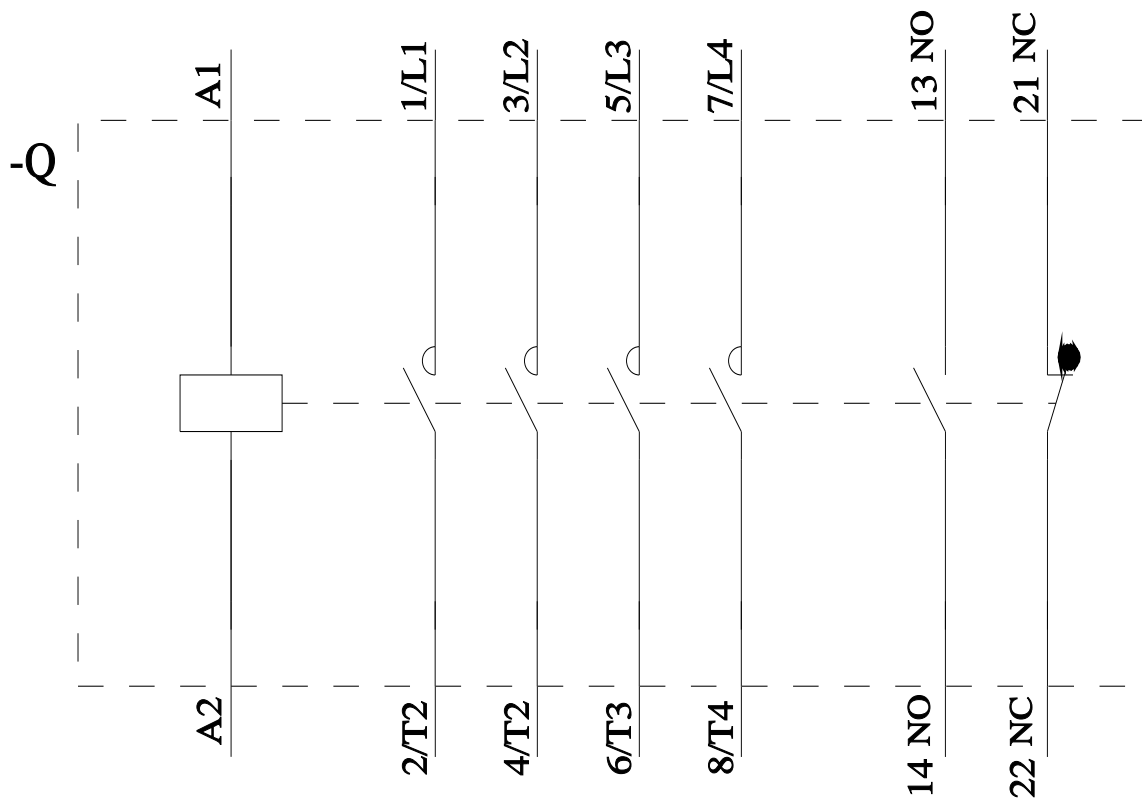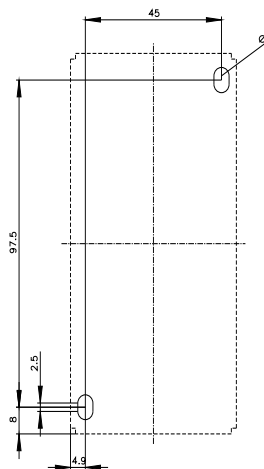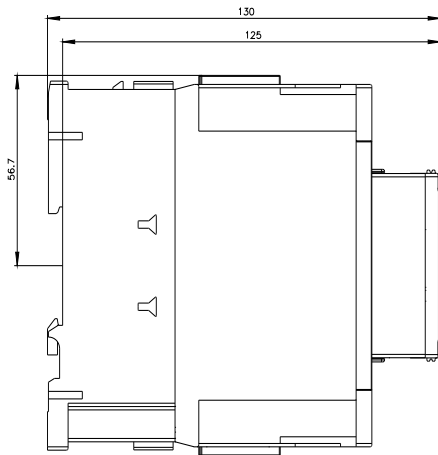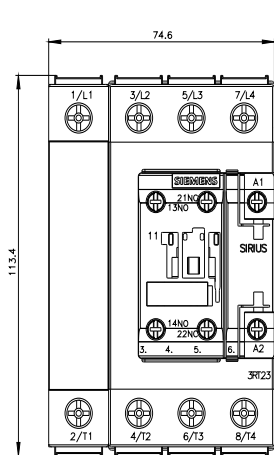

last modified:

11/11/2025

