









capacitor contactor, AC-6b 16.7 kVA_r, / 400 V, 3-pole, 24 V DC, auxiliary contacts: 1 NO + 2 NC, screw terminal, size: S0

| | |
|--|--------------------------|
| product brand name | SIRIUS |
| product designation | capacitor contactors |
| product type designation | 3RT26 |
| General technical data | |
| size of contactor | S0 |
| product extension auxiliary switch | No |
| power loss [W] for rated value of the current | |
| • at AC in hot operating state per pole | 0.9 W |
| • without load current share typical | 5.9 W |
| type of calculation of power loss depending on pole | quadratic |
| insulation voltage | |
| • of main circuit with degree of pollution 3 rated value | 690 V |
| • of auxiliary circuit with degree of pollution 3 rated value | 690 V |
| surge voltage resistance | |
| • of main circuit rated value | 6 kV |
| • of auxiliary circuit rated value | 6 kV |
| maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1 | 400 V |
| shock resistance at rectangular impulse | |
| • at DC | 10g / 5 ms, 7,5g / 10 ms |
| shock resistance with sine pulse | |
| • at DC | 15g / 5 ms, 10g / 10 ms |
| mechanical service life (operating cycles) | |
| • of the contactor with added auxiliary switch block typical | 3 000 000 |
| electrical endurance (operating cycles) | 200 000 |
| reference code according to IEC 81346-2 | Q |
| Substance Prohibitance (Date) | 05/01/2014 |
| Weight | 0.732 kg |
| Ambient conditions | |
| installation altitude at height above sea level maximum | 2 000 m |
| ambient temperature | |
| • during operation | -25 ... +60 °C |
| • during storage | -55 ... +80 °C |
| relative humidity minimum | 10 % |
| relative humidity at 55 °C according to IEC 60068-2-30 maximum | 95 % |
| Environmental footprint | |
| Environmental Product Declaration (EPD) | Yes |
| global warming potential [CO ₂ eq] total | 106 kg |
| global warming potential [CO ₂ eq] during manufacturing | 2.47 kg |
| global warming potential [CO ₂ eq] during operation | 104 kg |

| | |
|---|------------------|
| global warming potential [CO2 eq] after end of life | -0.226 kg |
| Main circuit | |
| number of poles for main current circuit | 3 |
| number of NO contacts for main contacts | 3 |
| number of NC contacts for main contacts | 0 |
| operational current at AC-6b at 690 V at ambient temperature 60 °C rated value | 24 A |
| operating reactive power at AC-6b | |
| • at 230 V at 50/60 Hz at ambient temperature 60 °C rated value | 3 ... 9.6 kvar |
| • at 400 V at 50/60 Hz at ambient temperature 60 °C rated value | 6 ... 16.7 kvar |
| • at 500 V at 50/60 Hz at ambient temperature 60 °C rated value | 7 ... 21 kvar |
| • at 690 V at 50/60 Hz at ambient temperature 60 °C rated value | 10 ... 29 kvar |
| no-load switching frequency | |
| • at DC | 500 1/h |
| operating frequency at AC-6b | |
| • at 230 V maximum | 180 1/h |
| • at 240 V maximum | 180 1/h |
| • at 400 V maximum | 180 1/h |
| • at 480 V maximum | 180 1/h |
| • at 500 V maximum | 180 1/h |
| • at 600 V maximum | 180 1/h |
| • at 690 V maximum | 150 1/h |
| Control circuit/ Control | |
| type of voltage | DC |
| type of voltage of the control supply voltage | DC |
| control supply voltage at DC rated value | 24 V |
| operating range factor control supply voltage rated value of magnet coil at DC | |
| • initial value | 0.8 |
| • full-scale value | 1.1 |
| closing power of magnet coil at DC | 5.9 W |
| holding power of magnet coil at DC | 5.9 W |
| closing delay | |
| • at DC | 50 ... 170 ms |
| opening delay | |
| • at DC | 15 ... 18 ms |
| arcing time | 10 ... 10 ms |
| control version of the switch operating mechanism | Standard A1 - A2 |
| residual current of the electronics for control with signal <0> | |
| • at DC at 24 V maximum permissible | 16 mA |
| Auxiliary circuit | |
| number of NC contacts for auxiliary contacts | 2 |
| • attachable | 0 |
| • instantaneous contact | 2 |
| number of NO contacts for auxiliary contacts | 1 |
| • attachable | 0 |
| • instantaneous contact | 1 |
| operational current of auxiliary contacts at AC-12 maximum | 10 A |
| operational current of auxiliary contacts at AC-15 | |
| • at 230 V | 6 A |
| • at 400 V | 3 A |
| • at 690 V | 1 A |
| operational current of auxiliary contacts at DC-13 | |
| • at 24 V | 6 A |
| • at 60 V | 2 A |
| • at 110 V | 1 A |
| • at 125 V | 0.9 A |
| • at 220 V | 0.3 A |

| | | |
|---|--|--------------|
| contact reliability of auxiliary contacts | 0.00000001 | |
| UL/CSA ratings | | |
| contact rating of auxiliary contacts according to UL | A600 / Q600 | |
| Category Control Number (CCN) | E31519 (NLDX, NLDX7) | |
| Short-circuit protection | | |
| design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V | C characteristic: 10 A; 0.4 kA | |
| design of the fuse link | | |
| <ul style="list-style-type: none"> for short-circuit protection of the main circuit with type of coordination 1 required | gG: 50 A (690 V, 50 kA) | |
| <ul style="list-style-type: none"> for short-circuit protection of the auxiliary switch required | gG: 10 A (690 V, 1 kA) | |
| Installation/ mounting/ dimensions | | |
| mounting position | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface | |
| fastening method | screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 50022 | |
| height | 135 mm | |
| width | 45 mm | |
| depth | 165 mm | |
| required spacing | | |
| <ul style="list-style-type: none"> with side-by-side mounting at the side | 10 mm | |
| <ul style="list-style-type: none"> for grounded parts at the side | 10 mm | |
| Connections/ Terminals | | |
| type of electrical connection | | |
| <ul style="list-style-type: none"> for main current circuit | screw-type terminals | |
| <ul style="list-style-type: none"> for auxiliary and control circuit | screw-type terminals | |
| <ul style="list-style-type: none"> at contactor for auxiliary contacts | Screw-type terminals | |
| <ul style="list-style-type: none"> of magnet coil | Screw-type terminals | |
| type of connectable conductor cross-sections for main contacts | | |
| <ul style="list-style-type: none"> solid | 2x (1 ... 2.5 mm ²), 2x (2.5 ... 10 mm ²) | |
| <ul style="list-style-type: none"> stranded | 2x (1 ... 2.5 mm ²), 2x (2.5 ... 10 mm ²) | |
| <ul style="list-style-type: none"> solid or stranded | 2x (1 ... 2.5 mm ²), 2x (2.5 ... 10 mm ²) | |
| <ul style="list-style-type: none"> finely stranded with core end processing | 2x (1 ... 2.5 mm ²), 2x (2.5 ... 6 mm ²), 1x 10 mm ² | |
| type of connectable conductor cross-sections | | |
| <ul style="list-style-type: none"> for auxiliary contacts | | |
| <ul style="list-style-type: none"> — solid | 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²), 2x 4 mm ² | |
| <ul style="list-style-type: none"> — solid or stranded | 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²), 2x 4 mm ² | |
| <ul style="list-style-type: none"> — finely stranded with core end processing | 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²) | |
| <ul style="list-style-type: none"> for AWG cables for auxiliary contacts | 2x (20 ... 16), 2x (18 ... 14), 2x 12 | |
| type of minimum connectable cross-sections for main contacts at AC-6b | | |
| <ul style="list-style-type: none"> at 40 °C | 1x 6 mm ² | |
| <ul style="list-style-type: none"> at 60 °C | 1x 10 mm ² , 2x 6 mm ² | |
| AWG number as coded connectable conductor cross section for main contacts | 16 ... 8 | |
| Safety related data | | |
| product function | | |
| <ul style="list-style-type: none"> mirror contact according to IEC 60947-4-1 | No | |
| <ul style="list-style-type: none"> positively driven operation according to IEC 60947-5-1 | No | |
| Electrical Safety | | |
| protection class IP on the front according to IEC 60529 | IP20 | |
| touch protection on the front according to IEC 60529 | finger-safe, for vertical contact from the front | |
| Approvals Certificates | | |
| General Product Approval | EMV | |
|       | | |
| Test Certificates | Maritime application | other |

other Dangerous goods Environment

[Confirmation](#)

[Transport Information](#)



[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2625-1BB45>

Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2625-1BB45>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2625-1BB45>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)




https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2625-1BB45&lang=en



Characteristic: Tripping characteristics, I²t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2625-1BB45/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<https://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2625-1BB45&objecttype=14&gridview=view1>

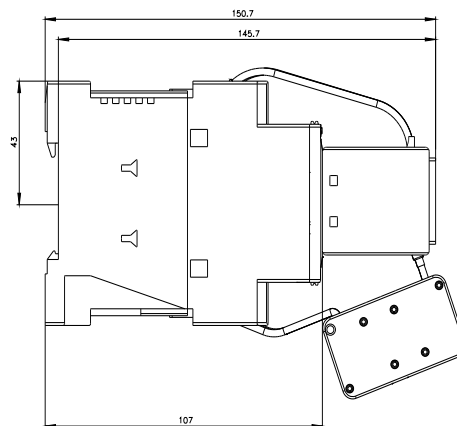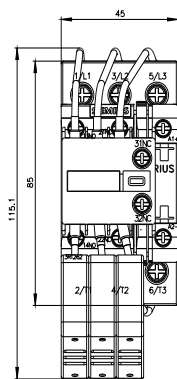

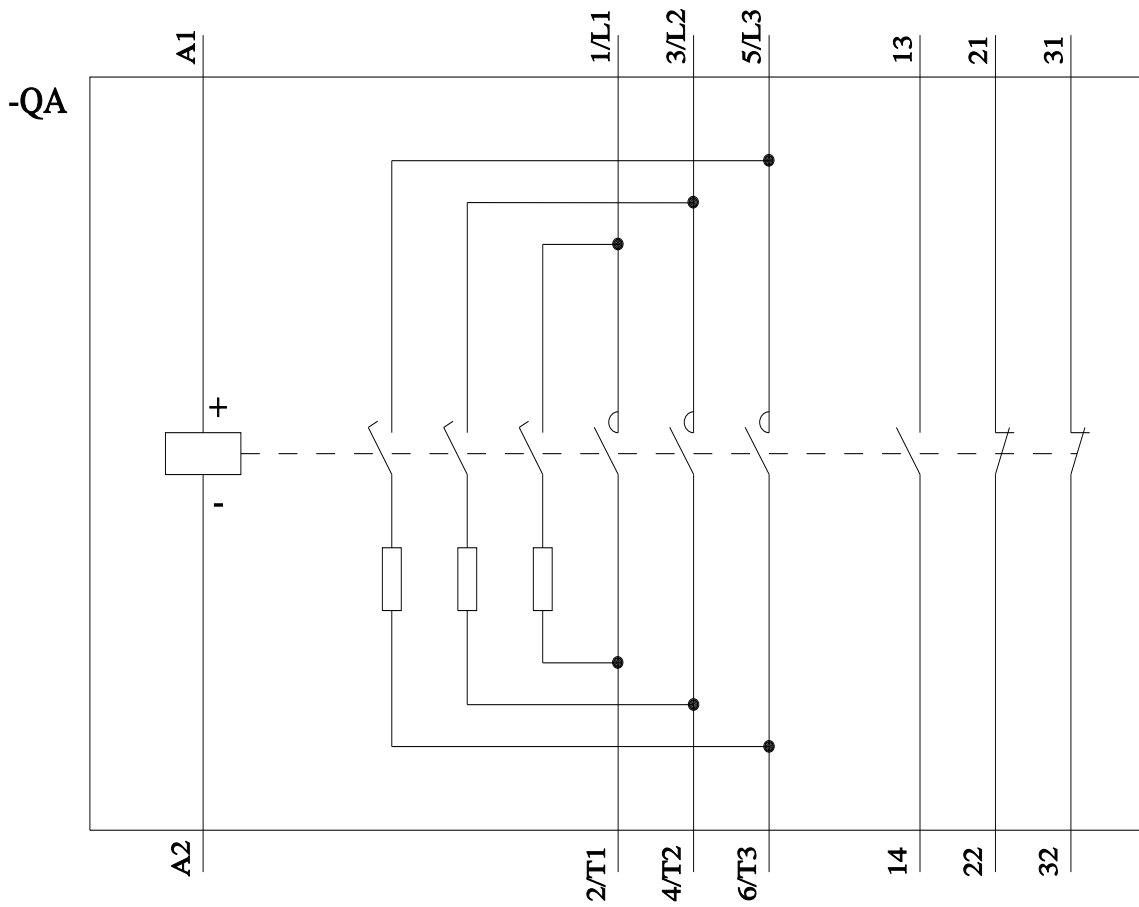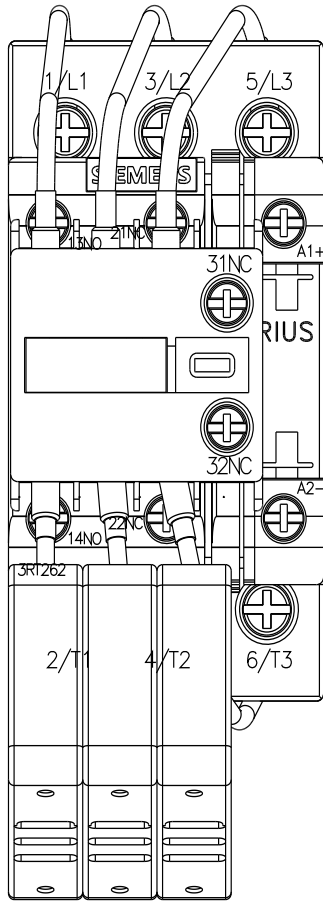

last modified:

11/13/2025