

Siemens  
EcoTech



Special type Circuit breaker size S00 for motor protection, CLASS 10 A-release 2.8...4 A N release 52 A screw terminal Standard switching capacity with transverse auxiliary switches 1 NO+1 NC Ambient temperature -50 °C 500 switching cycles



|   |                      |
|---|----------------------|
| product brand name  | SIRIUS               |
| product designation   | Circuit breaker      |
| design of the product   | For motor protection |
| product type designation  | 3RV2                 |
| <b>General technical data</b>                                   |                      |
| size of the circuit-breaker                                     | S00                  |
| size of contactor can be combined company-specific              | S00, S0              |
| product extension auxiliary switch                              | Yes                  |
| power loss [W] for rated value of the current                   |                      |
| • at AC in hot operating state                                  | 7.25 W               |
| • at AC in hot operating state per pole                         | 2.4 W                |
| insulation voltage with degree of pollution 3 at AC rated value | 690 V                |
| surge voltage resistance rated value                            | 6 kV                 |
| shock resistance according to IEC 60068-2-27                    | 25g / 11 ms          |
| mechanical service life (operating cycles)                      |                      |
| • of the main contacts typical                                  | 500                  |
| • of auxiliary contacts typical                                 | 500                  |
| electrical endurance (operating cycles) typical                 | 500                  |
| reference code according to IEC 81346-2                         | Q                    |
| Substance Prohibitance (Date)                                   | 10/01/2009           |
| SVHC substance name   | Lead - 7439-92-1     |
| Weight  | 0.361 kg             |
| <b>Ambient conditions</b>                                       |                      |
| installation altitude at height above sea level maximum         | 2 000 m              |
| ambient temperature   |                      |
| • during operation  | -50 ... +60 °C       |
| • during storage  | -50 ... +80 °C       |
| • during transport  | -50 ... +80 °C       |
| relative humidity during operation                              | 10 ... 95 %          |
| <b>Environmental footprint</b>                                  |                      |
| Environmental Product Declaration(EPD)                          | Yes                  |
| global warming potential [CO2 eq] total                         | 74.698 kg            |
| global warming potential [CO2 eq] during manufacturing          | 1.98 kg              |
| global warming potential [CO2 eq] during sales                  | 0.134 kg             |
| global warming potential [CO2 eq] during operation              | 72.7 kg              |
| global warming potential [CO2 eq] after end of life             | -0.116 kg            |
| Siemens Eco Profile (SEP)                                       | Siemens EcoTech      |

| Main circuit  |   |
|---|---|
| number of poles for main current circuit  | 3   |
| adjustable current response value current of the current-dependent overload release   | 2.8 ... 4 A   |
| type of voltage for main current circuit  | AC  |
| operating voltage <ul style="list-style-type: none"> <li>• rated value</li> <li>• at AC-3 rated value maximum</li> </ul>  | 20 ... 690 V<br>690 V   |
| operating frequency rated value   | 50 ... 60 Hz  |
| operational current rated value   | 4 A   |
| operational current <ul style="list-style-type: none"> <li>• at AC-3 at 400 V rated value</li> </ul>  | 4 A   |
| operating power <ul style="list-style-type: none"> <li>• at AC-3 <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> </ul> </li> </ul>               | 0.8 kW<br>1.5 kW<br>2.2 kW<br>3 kW  |
| operating frequency <ul style="list-style-type: none"> <li>• at AC-3 maximum</li> </ul>   | 15 1/h  |
| Auxiliary circuit   |   |
| design of the auxiliary switch  | transverse  |
| type of voltage for auxiliary and control circuit   | AC/DC   |
| number of NC contacts for auxiliary contacts  | 1   |
| number of NO contacts for auxiliary contacts  | 1   |
| number of CO contacts for auxiliary contacts  | 0   |
| operational current of auxiliary contacts at AC-15 <ul style="list-style-type: none"> <li>• at 24 V</li> <li>• at 120 V</li> <li>• at 125 V</li> <li>• at 230 V</li> </ul>  | 2 A<br>0.5 A<br>0.5 A<br>0.5 A  |
| operational current of auxiliary contacts at DC-13 <ul style="list-style-type: none"> <li>• at 24 V</li> <li>• at 60 V</li> </ul>   | 1 A<br>0.15 A   |
| Protective and monitoring functions   |   |
| product function <ul style="list-style-type: none"> <li>• ground fault detection</li> <li>• phase failure detection</li> </ul>  | No<br>Yes   |
| trip class  | CLASS 10  |
| design of the overload release  | thermal   |
| maximum short-circuit current breaking capacity (I <sub>cu</sub> ) <ul style="list-style-type: none"> <li>• at AC at 240 V rated value</li> <li>• at AC at 400 V rated value</li> <li>• at AC at 500 V rated value</li> <li>• at AC at 690 V rated value</li> </ul> | 100 kA<br>100 kA<br>100 kA<br>6 kA  |
| operating short-circuit current breaking capacity (I <sub>cs</sub> ) at AC <ul style="list-style-type: none"> <li>• at 240 V rated value</li> <li>• at 400 V rated value</li> <li>• at 500 V rated value</li> <li>• at 690 V rated value</li> </ul>                 | 100 kA<br>100 kA<br>100 kA<br>4 kA  |
| response value current of instantaneous short-circuit trip unit   | 52 A  |
| UL/CSA ratings  |   |
| Category Control Number (CCN)   | E156943 (NKJH, NKJH7)   |
| Short-circuit protection  |   |
| product function short circuit protection   | Yes   |
| design of the short-circuit trip  | magnetic  |
| design of the fuse link <ul style="list-style-type: none"> <li>• for short-circuit protection of the auxiliary switch required</li> </ul>   | fuse gG: 10 A, miniature circuit breaker C 6 A (short-circuit current I <sub>k</sub> < 400 A) |
| design of the fuse link for IT network for short-circuit protection of the main circuit <ul style="list-style-type: none"> <li>• at 400 V</li> </ul>  | gG 32 A   |

|   |  |
|---|--|
| <ul style="list-style-type: none"> <li>• at 500 V</li> <li>• at 690 V</li> </ul>  | gG 32 A<br>gG 25 A   |
| <b>Installation/ mounting/ dimensions</b>   |  |
| <b>mounting position</b>  | any  |
| <b>fastening method</b>   | screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715   |
| <b>height</b>   | 97 mm  |
| <b>width</b>  | 45 mm  |
| <b>depth</b>  | 97 mm  |
| <b>required spacing</b>   |  |
| <ul style="list-style-type: none"> <li>• with side-by-side mounting at the side</li> </ul>  | 0 mm   |
| <ul style="list-style-type: none"> <li>• for grounded parts at 400 V               <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> </ul>  | 30 mm<br>30 mm<br>9 mm   |
| <ul style="list-style-type: none"> <li>• for live parts at 400 V               <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> </ul>  | 30 mm<br>30 mm<br>9 mm   |
| <ul style="list-style-type: none"> <li>• for grounded parts at 500 V               <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> </ul>  | 30 mm<br>30 mm<br>9 mm   |
| <ul style="list-style-type: none"> <li>• for live parts at 500 V               <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> </ul>  | 30 mm<br>30 mm<br>9 mm   |
| <ul style="list-style-type: none"> <li>• for grounded parts at 690 V               <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— backwards</li> <li>— at the side</li> <li>— forwards</li> </ul> </li> </ul> | 50 mm<br>50 mm<br>0 mm<br>30 mm<br>0 mm  |
| <ul style="list-style-type: none"> <li>• for live parts at 690 V               <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— backwards</li> <li>— at the side</li> <li>— forwards</li> </ul> </li> </ul>     | 50 mm<br>50 mm<br>0 mm<br>30 mm<br>0 mm  |
| <b>Connections/ Terminals</b>   |  |
| <b>type of electrical connection</b>  |  |
| <ul style="list-style-type: none"> <li>• for main current circuit</li> <li>• for auxiliary and control circuit</li> </ul>   | screw-type terminals<br>screw-type terminals   |
| <b>arrangement of electrical connectors for main current circuit</b>  | Top and bottom   |
| <b>type of connectable conductor cross-sections</b>   |  |
| <ul style="list-style-type: none"> <li>• for main contacts               <ul style="list-style-type: none"> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> </ul>                                  | 2x (0,75 ... 2,5 mm <sup>2</sup> ), 2x 4 mm <sup>2</sup><br>2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )              |
| <b>type of connectable conductor cross-sections</b>   |  |
| <ul style="list-style-type: none"> <li>• for auxiliary contacts               <ul style="list-style-type: none"> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> </ul>                             | 2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )<br>2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> ) |
| <b>tightening torque</b>  |  |
| <ul style="list-style-type: none"> <li>• for main contacts with screw-type terminals</li> <li>• for auxiliary contacts with screw-type terminals</li> </ul>   | 0.8 ... 1.2 N·m<br>0.8 ... 1.2 N·m   |
| <b>design of screwdriver shaft</b>  | Diameter 5 to 6 mm   |
| <b>size of the screwdriver tip</b>  | Pozidriv size 2  |
| <b>design of the thread of the connection screw</b>   |  |
| <ul style="list-style-type: none"> <li>• for main contacts</li> <li>• of the auxiliary and control contacts</li> </ul>  | M3<br>M3   |
| IEC 61508   |  |

|   |  |
|---|--|
| <b>T1 value</b><br>• for proof test interval or service life according to IEC 61508 | 10 a   |
| <b>Electrical Safety</b>  |  |
| <b>protection class IP on the front according to IEC 60529</b>                      | IP20   |
| <b>touch protection on the front according to IEC 60529</b>                         | finger-safe, for vertical contact from the front |
| <b>Display</b>  |  |
| display version for switching status  | Handle   |
| <b>Approvals Certificates</b>   |  |
| <b>General Product Approval</b>   |  |



[KC](#)



|                                 |                          |                             |
|---------------------------------|--------------------------|-----------------------------|
| <b>General Product Approval</b> | <b>Test Certificates</b> | <b>Maritime application</b> |
|---------------------------------|--------------------------|-----------------------------|



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



|                             |              |
|-----------------------------|--------------|
| <b>Maritime application</b> | <b>other</b> |
|-----------------------------|--------------|



[Confirmation](#)

[Miscellaneous](#)



|              |                |                    |
|--------------|----------------|--------------------|
| <b>other</b> | <b>Railway</b> | <b>Environment</b> |
|--------------|----------------|--------------------|



[Special Test Certificate](#)

[Confirmation](#)



**Siemens EcoTech**



[Environmental Confirmations](#)

**Further information**

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2011-1EA15-0BA0>

Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2011-1EA15-0BA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2011-1EA15-0BA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)




[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RV2011-1EA15-0BA0&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2011-1EA15-0BA0&lang=en)


Characteristic: Tripping characteristics, I<sub>t</sub>, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2011-1EA15-0BA0/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<https://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2011-1EA15-0BA0&objecttype=14&gridview=view1>

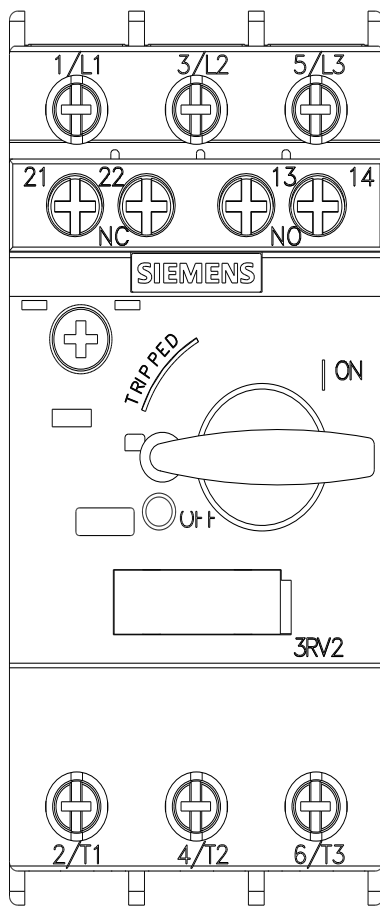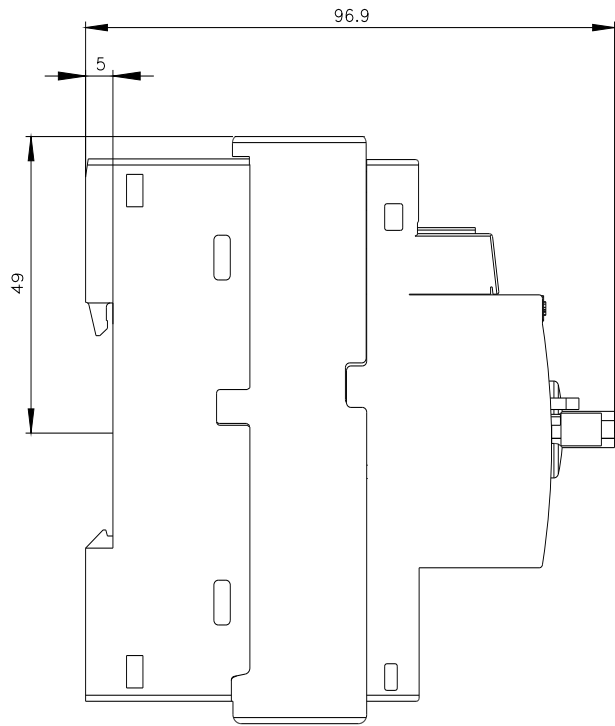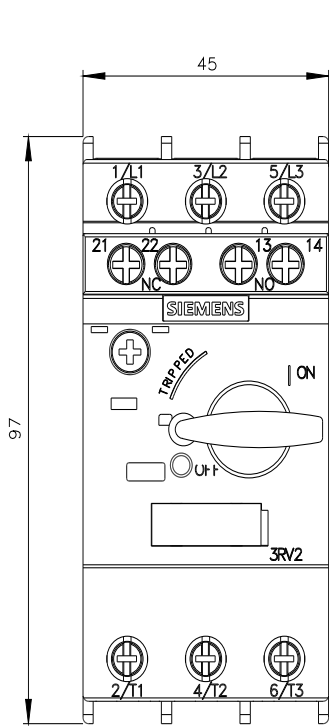

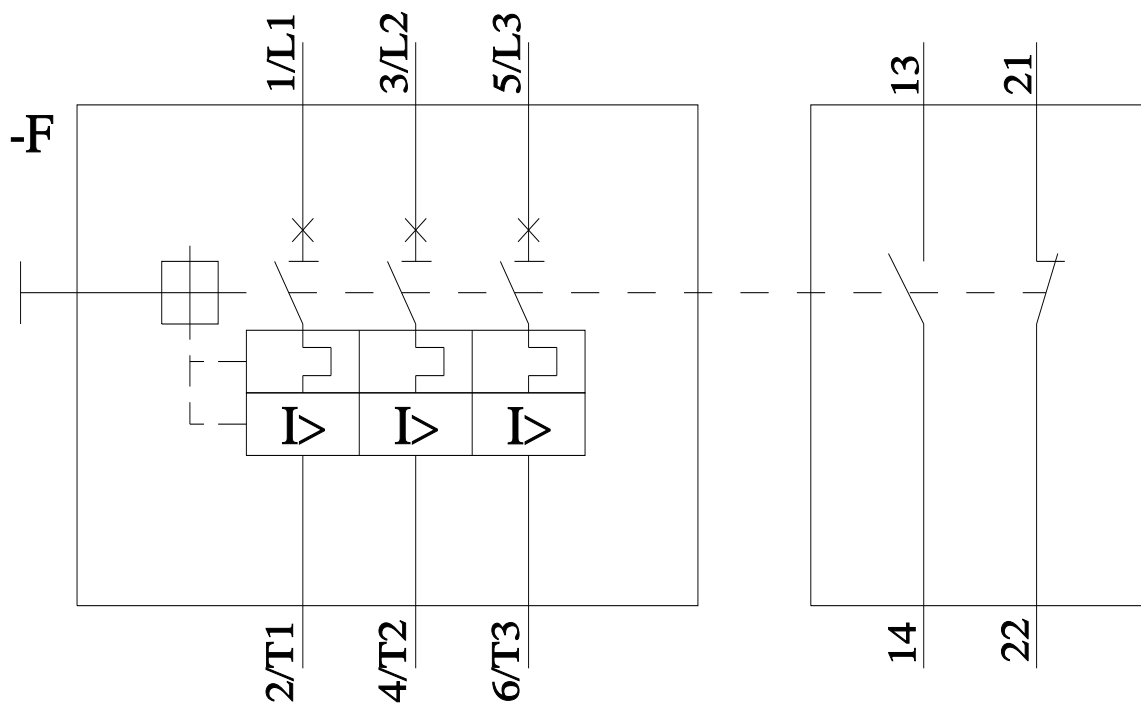

last modified:

11/13/2025 