



SIRIUS safety relay Basic unit Advanced series with time delay 0.5-30 s electronic enabling circuits 2 NO instantaneous 2 NO delayed $U_s = 24\text{ V DC}$ screw terminal

| | |
|--|---|
| product brand name | SIRIUS |
| product category | Safety relays |
| product designation | safety relays |
| design of the product | Solid-state enabling circuits |
| product type designation | 3SK1 |
| product line | Advanced basic unit |
| Product Function | |
| product function parameterizable | sensor floating / sensor non-floating, monitored start-up / automatic start, 1-channel / 2-channel sensor connection, cross-circuit detection, startup testing, antivalent sensors, 2-hand switches, time delay |
| product function | |
| <ul style="list-style-type: none"> • automatic start • light barrier monitoring • protective door monitoring • magnetically operated switch monitoring NC-NO • magnetically operated switch monitoring NC-NC • laser scanner monitoring • light array monitoring • EMERGENCY OFF function • monitored start-up • pressure-sensitive mat monitoring | <ul style="list-style-type: none"> Yes Yes Yes Yes Yes Yes Yes Yes Yes No |
| suitability for interaction press control | Yes |
| suitability for operation device connector 3ZY12 | Yes |
| suitability for use | |
| <ul style="list-style-type: none"> • monitoring of floating sensors • monitoring of non-floating sensors • position switch monitoring • EMERGENCY-OFF circuit monitoring • opto-electronic protection device monitoring • magnetically operated switch monitoring • safety switch • safety-related circuits | <ul style="list-style-type: none"> Yes Yes Yes Yes Yes Yes Yes Yes |
| General technical data | |
| certificate of suitability UL approval | Yes |
| product feature cross-circuit-proof | Yes |
| power loss [W] maximum | 2 W |
| insulation voltage rated value | 50 V |
| degree of pollution | 3 |
| overvoltage category | 3 |
| surge voltage resistance rated value | 800 V |
| protection class IP of the enclosure | IP20 |

| | |
|---|--|
| shock resistance | 10g / 11 ms |
| vibration resistance according to IEC 60068-2-6 | 5 ... 500 Hz: 0.75 mm |
| operating frequency maximum | 2 000 1/h |
| reference code according to IEC 81346-2 | F |
| Substance Prohibitance (Date) | 11/05/2012 |
| SVHC substance name | Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol - 79-94-7 Lead titanium zirconium oxide - 12626-81-2 6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol - 119-47-1 2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one - 71868-10-5 |
| Weight | 0.199 kg |
| Ambient conditions | |
| installation altitude at height above sea level maximum | 4 000 m; Derating, see Product Notification 109792701 |
| ambient temperature | |
| • during operation | -25 ... +60 °C |
| • during storage | -40 ... +80 °C |
| relative humidity during operation | 10 ... 95 % |
| air pressure according to SN 31205 | 900 ... 1 060 hPa |
| Electromagnetic compatibility | |
| installation environment regarding EMC | This product is suitable for Class A environments only. In household environments, this device can cause unwanted radio interference. The user is required to implement appropriate measures in this case. |
| EMC emitted interference | IEC 60947-5-1, Class A |
| Safety related data | |
| product function suitable for safety function | Yes |
| safe state | Safety outputs switched off |
| test wear-related service life necessary | No |
| diagnostics test interval by internal test function maximum | 600 s |
| stop category according to IEC 60204-1 | 0 / 1 |
| IEC 62061 | |
| SIL Claim Limit (subsystem) according to EN 62061 | 3 |
| Safety Integrity Level (SIL) | |
| • according to IEC 62061 | SIL 3 |
| • at single-channel evaluation according to IEC 62061 | 1 |
| • at 2-channel evaluation according to IEC 62061 | 3 |
| PFHD with high demand rate according to IEC 62061 | 1.5E-9 1/h |
| ISO 13849 | |
| category according to EN ISO 13849-1 | 4 |
| performance level (PL) | |
| • according to ISO 13849-1 | PL e |
| • at single-channel evaluation according to ISO 13849-1 | c |
| • at 2-channel evaluation according to ISO 13849-1 | e |
| • for delayed release circuit according to ISO 13849-1 | e |
| category | |
| • according to ISO 13849-1 | 4 |
| • at 2-channel evaluation according to ISO 13849-1 | 4 |
| overdimensioning according to ISO 13849-2 necessary | |
| | No |
| IEC 61508 | |
| Safety Integrity Level (SIL) | |
| • according to IEC 61508 | 3 |
| • for delayed release circuit according to IEC 61508 | SIL3 |
| • at single-channel evaluation according to IEC 61508 | 1 |
| • at 2-channel evaluation according to IEC 61508 | 3 |
| safety device type according to IEC 61508-2 | Type B |
| PFHD with high demand rate according to IEC 61508 | 1.5E-9 1/h |
| Average probability of failure on demand (PFDavg) with low demand rate acc. to IEC 61508 | 7E-6 1/y |
| PFDavg with low demand rate according to IEC 61508 | 7E-6 |
| Safe failure fraction (SFF) | 99 % |
| hardware fault tolerance | |
| • according to IEC 61508 | 1 |
| • at single-channel evaluation according to IEC 61508 | 0 |

| | |
|---|----------------------------|
| <ul style="list-style-type: none"> at 2-channel evaluation according to IEC 61508 | 1 |
| T1 value | |
| <ul style="list-style-type: none"> of service life according to IEC 61508 | 20 a |
| <ul style="list-style-type: none"> for proof test interval or service life according to IEC 61508 | 20 a |
| Electrical Safety | |
| touch protection against electrical shock | finger-safe |
| Short-circuit protection | |
| design of the fuse link | |
| <ul style="list-style-type: none"> for short-circuit protection of the NO contacts of the relay outputs required | not required |
| Inputs | |
| design of input | |
| <ul style="list-style-type: none"> cascading input/functional switching | Yes |
| <ul style="list-style-type: none"> feedback input | Yes |
| <ul style="list-style-type: none"> start input | Yes |
| pulse duration of the sensor input minimum | 60 ms |
| number of sensor inputs 1-channel or 2-channel | 1 |
| Outputs | |
| number of outputs as contact-affected switching element | |
| <ul style="list-style-type: none"> as NO contact <ul style="list-style-type: none"> safety-related instantaneous contact safety-related delayed switching | 0 0 |
| number of outputs as contact-less semiconductor switching element | |
| <ul style="list-style-type: none"> for signaling function <ul style="list-style-type: none"> instantaneous contact safety-related <ul style="list-style-type: none"> delayed switching instantaneous contact | 0 2 2 |
| switching capacity current of semiconductor outputs at DC-13 at 24 V | 2 A |
| Times | |
| make time with automatic start | |
| <ul style="list-style-type: none"> at DC maximum | 85 ms |
| make time with automatic start after power failure | |
| <ul style="list-style-type: none"> typical maximum | 6 500 ms 6 500 ms |
| make time with monitored start | |
| <ul style="list-style-type: none"> maximum | 85 ms |
| backslide delay time after opening of the safety circuits typical | 40 ms |
| adjustable OFF-delay time after opening of the safety circuits | 0.5 ... 30 s |
| recovery time after opening of the safety circuits typical | 30 ms |
| recovery time after power failure typical | 6.5 s |
| pulse duration | |
| <ul style="list-style-type: none"> of the ON pushbutton input minimum | 0.15 s |
| Control circuit/ Control | |
| type of voltage of the control supply voltage | DC |
| control supply voltage at DC rated value | 24 V |
| operating range factor control supply voltage rated value of magnet coil at DC | |
| <ul style="list-style-type: none"> initial value full-scale value | 0.8 1.2 |
| Installation/ mounting/ dimensions | |
| mounting position | any |
| fastening method | screw and snap-on mounting |
| height | 100 mm |
| width | 22.5 mm |
| depth | 121.6 mm |
| required spacing | |

- for grounded parts at the side

5 mm

Connections/ Terminals

| | |
|---|--|
| type of electrical connection | screw terminal |
| wire length | 4 000 m |
| <ul style="list-style-type: none"> • with Cu 1.5 mm² and 150 nF/km per sensor circuit maximum | |
| type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> • solid | 1x (0.5 ... 2.5 mm ²), 2x (1.0 ... 1.5 mm ²) |
| <ul style="list-style-type: none"> • finely stranded with core end processing | 1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.0 mm ²) |
| <ul style="list-style-type: none"> • for AWG cables solid | 1x (20 ... 14), 2x (18 ... 16) |
| <ul style="list-style-type: none"> • for AWG cables stranded | 1x (20 ... 16), 2x (20 ... 16) |
| type of electrical connection plug-in socket | No |

Approvals Certificates

General Product Approval

EMV



Functional Safety

Test Certificates

Maritime application

[Type Examination Certificate](#)

[Type Test Certificates/Test Report](#)



other

Railway

Environment



[Confirmation](#)

[Confirmation](#)

[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SK1122-1CB42>

Cax online generator



<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SK1122-1CB42>




Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SK1122-1CB42>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SK1122-1CB42&lang=en

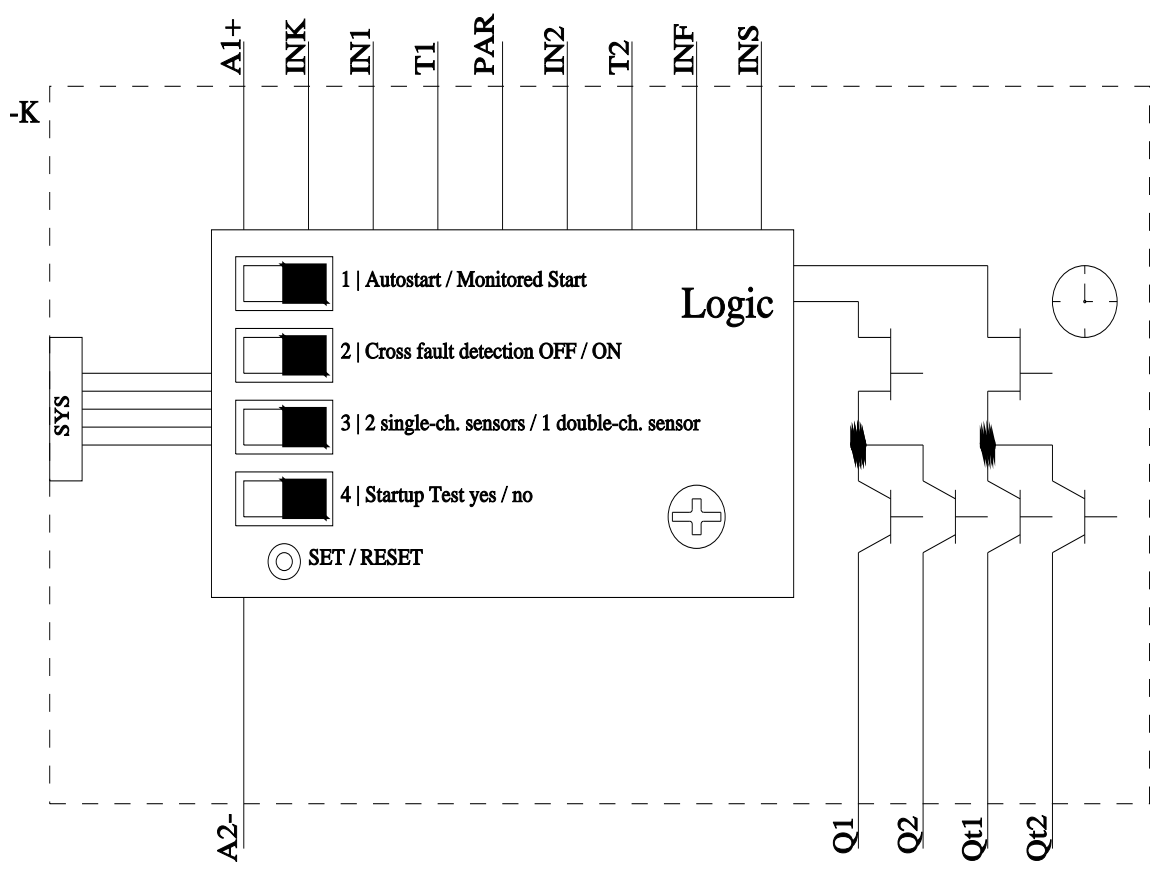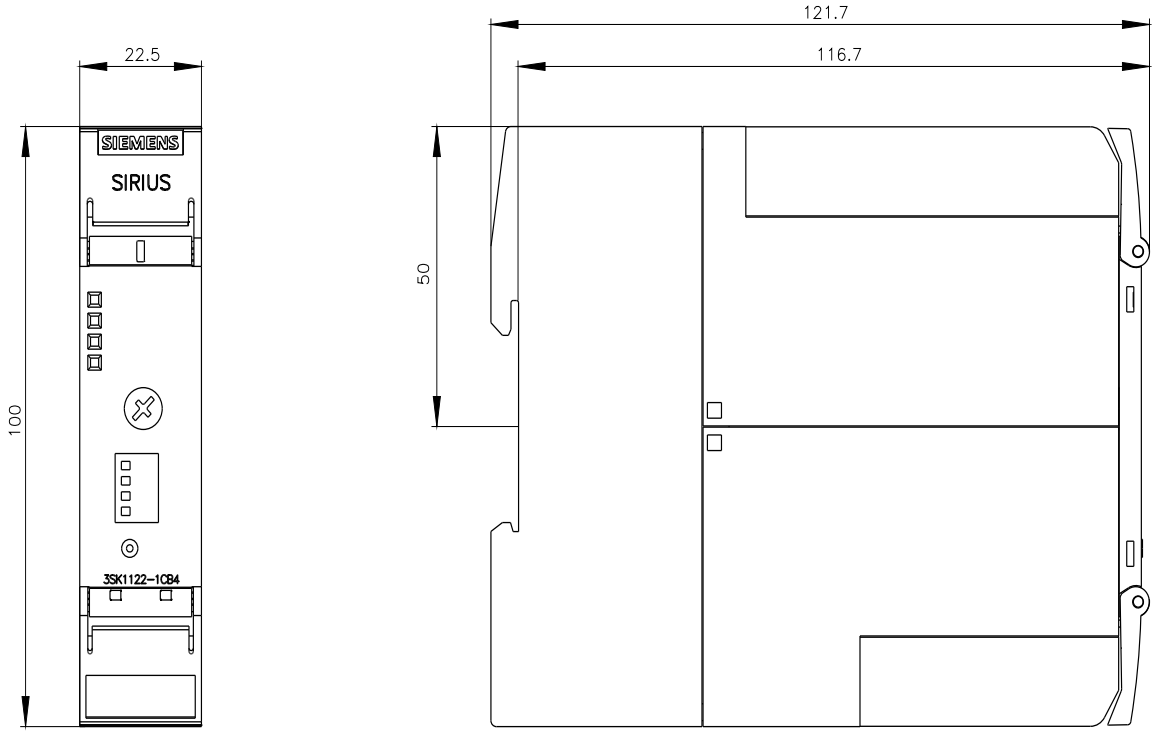

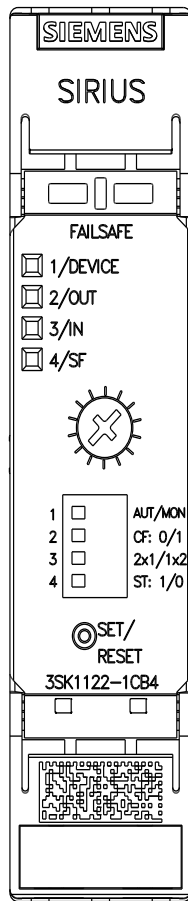

last modified:

10/7/2025