



contactor, DC-3/DC-5, 75 A, 2-pole, 48 V DC, 0.7-1.25\* U<sub>c</sub>, with varistor and series resistor, auxiliary contacts: 2 NO + 1 NC, connecting bar, frame size 4, for railway applications

<b>product designation</b>	Contactor
<b>product type designation</b>	3TC
<b>General technical data</b>	
<b>size of contactor</b>	4
<b>product extension</b>	
• function module for communication	No
• auxiliary switch	No
<b>insulation voltage rated value</b>	800 V
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	300 V
<b>shock resistance at rectangular impulse</b>	
• at DC	10g / 5 ms, 5g / 10 ms
<b>mechanical service life (operating cycles)</b>	
• of contactor typical	10 000 000
• of the contactor with added auxiliary switch block typical	10 000 000
<b>reference code according to IEC 81346-2</b>	Q
<b>Substance Prohibitance (Date)</b>	03/01/2017
<b>SVHC substance name</b>	Lead - 7439-92-1
<b>Weight</b>	4.2 kg
<b>Ambient conditions</b>	
<b>ambient temperature</b>	
• during operation	-40 ... +70 °C
• during storage	-50 ... +80 °C
<b>relative humidity minimum</b>	10 %
<b>relative humidity at 55 °C according to IEC 60068-2-30 maximum</b>	95 %
<b>Main circuit</b>	
<b>number of poles</b>	2
<b>number of poles for main current circuit</b>	2
<b>number of NO contacts for main contacts</b>	2
<b>number of NC contacts for main contacts</b>	0
<b>type of voltage</b>	DC
<b>operational current</b>	
• at 1 current path at DC-1	
— at 24 V rated value	75 A
— at 110 V rated value	75 A
— at 220 V rated value	75 A
• with 2 current paths in series at DC-1	
— at 24 V rated value	75 A

— at 110 V rated value	75 A
— at 220 V rated value	75 A
— at 440 V rated value	75 A
— at 600 V rated value	75 A
— at 750 V rated value	75 A
● <b>at DC-3 at DC-5</b>	
— at 220 V rated value	75 A
— at 600 V rated value	75 A
— at 750 V rated value	75 A
● <b>at 1 current path at DC-3 at DC-5</b>	
— at 24 V rated value	75 A
— at 110 V rated value	75 A
— at 220 V rated value	75 A
● <b>with 2 current paths in series at DC-3 at DC-5</b>	
— at 24 V rated value	75 A
— at 110 V rated value	75 A
— at 220 V rated value	75 A
— at 440 V rated value	75 A
— at 600 V rated value	75 A
— at 750 V rated value	75 A
<b>operating power</b>	
● <b>at DC-1</b>	
— at 110 V rated value	8.2 kW
— at 220 V rated value	16.5 kW
— at 440 V rated value	33 kW
— at 750 V rated value	56 kW
● <b>at DC-3 at DC-5</b>	
— at 110 V rated value	6.5 kW
— at 220 V rated value	13 kW
— at 440 V rated value	27 kW
— at 600 V rated value	38 kW
— at 750 V rated value	45 kW
<b>operating frequency</b>	
● <b>at DC-1 maximum</b>	1 000 1/h
● <b>at DC-3 maximum</b>	600 1/h
● <b>at DC-5 maximum</b>	600 1/h
<b>Control circuit/ Control</b>	
<b>type of voltage of the control supply voltage</b>	DC
<b>control supply voltage at DC rated value</b>	48 V
<b>design of the surge suppressor</b>	with varistor
<b>closing power of magnet coil at DC</b>	19 W
<b>holding power of magnet coil at DC</b>	19 W
closing delay at DC	90 ... 380 ms
opening delay at DC	17 ... 28 ms
<b>arcing time</b>	20 ... 30 ms
<b>Auxiliary circuit</b>	
<b>number of NC contacts for auxiliary contacts</b>	1
● instantaneous contact	1
<b>number of NO contacts for auxiliary contacts</b>	2
● instantaneous contact	2
number of CO contacts for auxiliary contacts	0
<b>identification number and letter for switching elements</b>	21
operational current at AC-12 maximum	10 A
<b>operational current at AC-15</b>	
● at 230 V rated value	5.6 A
● at 400 V rated value	3.6 A
● at 500 V rated value	2.5 A
<b>operational current at DC-12</b>	
● at 24 V rated value	10 A

<ul style="list-style-type: none"> <li>• at 48 V rated value</li> <li>• at 60 V rated value</li> <li>• at 110 V rated value</li> <li>• at 125 V rated value</li> <li>• at 220 V rated value</li> <li>• at 600 V rated value</li> </ul>	10 A 10 A 3.2 A 2.5 A 0.9 A 0.22 A
<b>operational current at DC-13</b> <ul style="list-style-type: none"> <li>• at 24 V rated value</li> <li>• at 48 V rated value</li> <li>• at 60 V rated value</li> <li>• at 110 V rated value</li> <li>• at 125 V rated value</li> <li>• at 220 V rated value</li> <li>• at 600 V rated value</li> </ul>	10 A 5 A 5 A 1.14 A 0.98 A 0.48 A 0.07 A
<b>UL/CSA ratings</b>	
<b>contact rating of auxiliary contacts according to UL</b>	A600 / P600
<b>Short-circuit protection</b>	
<b>design of the fuse link</b> <ul style="list-style-type: none"> <li>• for short-circuit protection of the main circuit               <ul style="list-style-type: none"> <li>— with type of coordination 1 required</li> <li>— with type of coordination 2 required</li> </ul> </li> <li>• for short-circuit protection of the auxiliary switch required</li> </ul>	2 x 3NA31 (160 A) in series (750 V, 5 kA) 2 x 3NA31 (63 A) in series (750 V, 5 kA) gG: 16 A (500 V, 1 kA)
<b>Installation/ mounting/ dimensions</b>	
<b>mounting position</b>	+/-22,5° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
fastening method side-by-side mounting	Yes
<b>fastening method</b>	screw fixing
<b>height</b>	177.5 mm
<b>width</b>	143 mm
<b>depth</b>	184 mm
<b>required spacing</b> <ul style="list-style-type: none"> <li>• with side-by-side mounting               <ul style="list-style-type: none"> <li>— forwards</li> <li>— backwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts               <ul style="list-style-type: none"> <li>— forwards</li> <li>— backwards</li> <li>— upwards</li> <li>— at the side</li> <li>— downwards</li> </ul> </li> <li>• for live parts               <ul style="list-style-type: none"> <li>— forwards</li> <li>— backwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> </ul>	20 mm 0 mm 10 mm 10 mm 10 mm  55 mm 0 mm 10 mm 10 mm 10 mm  55 mm 0 mm 10 mm 10 mm 10 mm
<b>Connections/ Terminals</b>	
<b>type of electrical connection</b> <ul style="list-style-type: none"> <li>• for main current circuit</li> <li>• for auxiliary and control circuit</li> </ul>	screw terminal screw-type terminals screw-type terminals
<b>type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>• for auxiliary contacts               <ul style="list-style-type: none"> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> </ul>	2x (1 ... 2.5 mm <sup>2</sup> ) 2x (0.75 ... 1.5 mm <sup>2</sup> )
<b>Safety related data</b>	
product function mirror contact according to IEC 60947-4-1	Yes

Electrical Safety	
protection class IP on the front according to IEC 60529	IP00; IP20 with box terminal/cover
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front with cover
Approvals Certificates	
General Product Approval	



Functional Safety	Test Certificates	other
-------------------	-------------------	-------

[Type Examination Certificate](#)

[Type Test Certificates/Test Report](#)

[Miscellaneous](#)

[Special Test Certificate](#)



[Confirmation](#)

Dangerous goods	Environment
-----------------	-------------

[Transport Information](#)

[Environmental Confirmations](#)

#### Further information

**Information on the packaging**

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

**Information for data generation and storage**

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<https://www.siemens.com/ic10>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3TC4817-0LW4>

**Cax online generator**

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TC4817-0LW4>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3TC4817-0LW4>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**




[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3TC4817-0LW4&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TC4817-0LW4&lang=en)

**Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current**

<https://support.industry.siemens.com/cs/ww/en/ps/3TC4817-0LW4/char>

**Further characteristics (e.g. electrical endurance, switching frequency)**

<https://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3TC4817-0LW4&objecttype=14&gridview=view1>

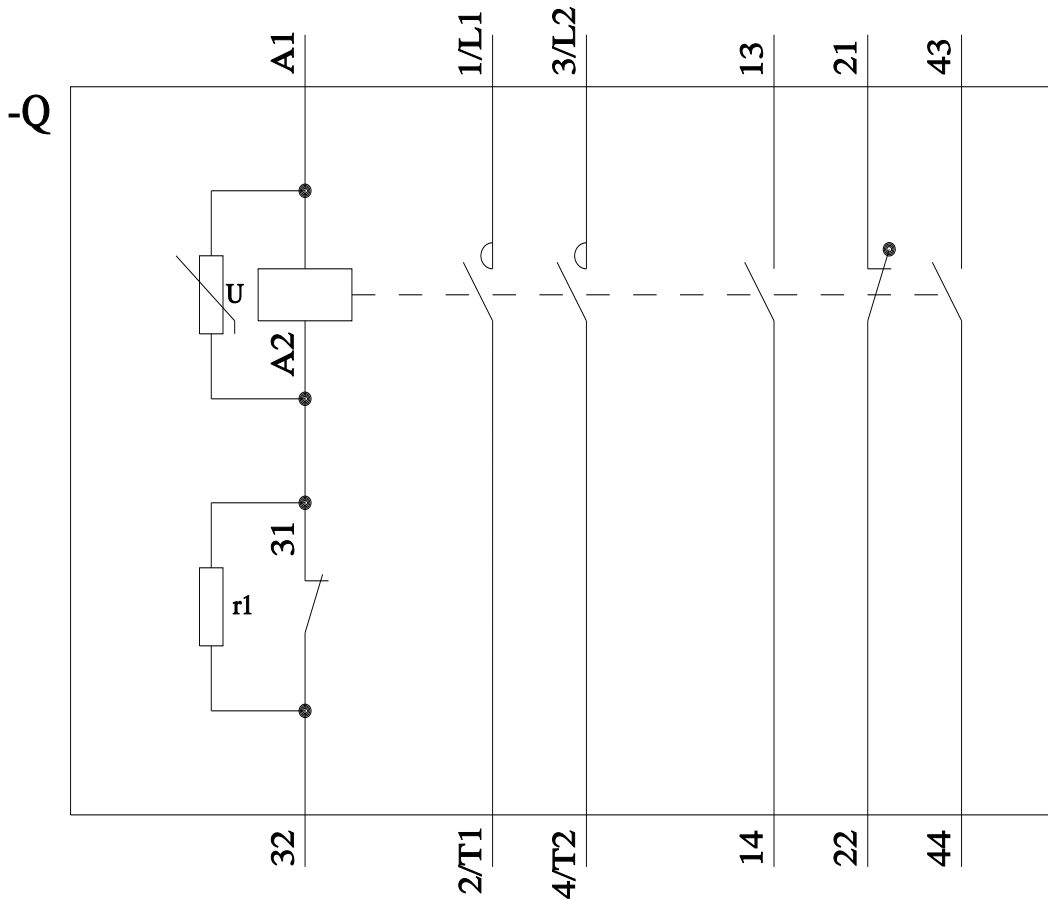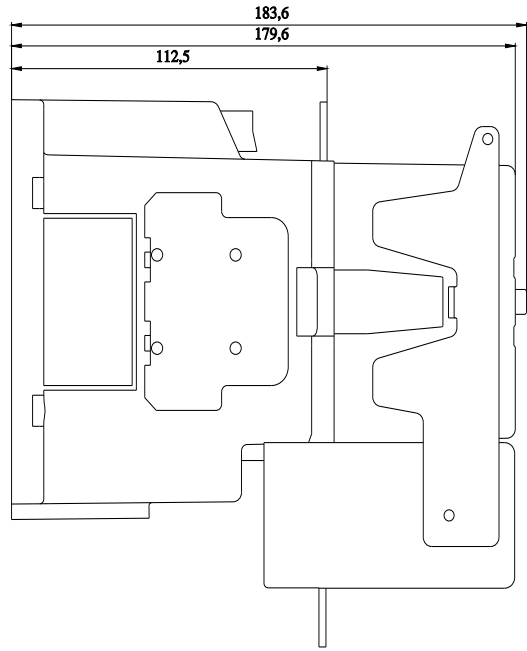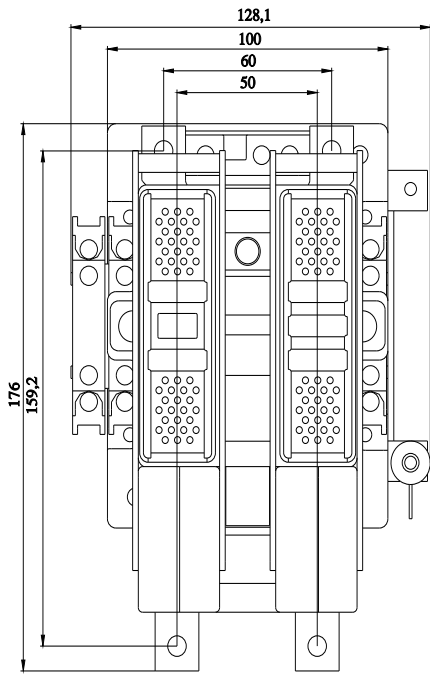

last modified:

4/4/2025

