




Figure similar

contactor relay, 100E, EN 50011, 8 NO + 2 NC, screw terminal DC operation 33 V
DC integrated varistor

product designation	Auxiliary contactor
product type designation	3TH4
size of contactor	0
reference code according to IEC 81346-2	K
Substance Prohibition (Date)	03/01/2017
Weight	0.712 kg
ambient temperature during operation	-40 ... +70 °C
type of voltage of the control supply voltage	DC
control supply voltage at DC rated value	33 V
design of the surge suppressor	with varistor
number of NC contacts for auxiliary contacts	2
• delayed switching	0
• lagging switching	0
• make-before-break switching	0
number of NO contacts for auxiliary contacts	8
• delayed switching	0
• leading contact	0
• make-before-break switching	0
number of CO contacts for auxiliary contacts	0
identification number and letter for switching elements	82 E
operational current at AC-15	
• at 230 V rated value	10 A
• at 400 V rated value	6 A
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 50022
height	78 mm
width	55 mm
depth	135 mm
type of electrical connection for auxiliary and control circuit	screw-type terminals
Safety related data	
product function positively driven operation according to IEC 60947-5-1	Yes
B10 value with high demand rate according to SN 31920	1 000 000; With 0.3 x I _e
IEC 61508	
T1 value	
• for proof test interval or service life according to IEC 61508	20 a
Electrical Safety	
protection class IP on the front according to IEC 60529	IP00; IP20 with screws tightened, even for contacts not in use
Approvals Certificates	



General Product Approval				Functional Safety	Test Certificates
				Type Examination Certificate	Miscellaneous

Test Certificates			other	Railway	
Type Test Certificates/Test Report	Special Test Certificate	Miscellaneous		Confirmation	Special Test Certificate

Environment
Environmental Conformations

Further information

- Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
- Information for data generation and storage
<https://support.industry.siemens.com/cs/ww/en/view/109995012>
- Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/ic10>
- Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3TH4382-0LC8>
- Cax online generator
<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TH4382-0LC8>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3TH4382-0LC8>
- Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TH4382-0LC8&lang=en
- Characteristic: Tripping characteristics, I²t, Let-through current
<https://support.industry.siemens.com/cs/ww/en/ps/3TH4382-0LC8/char>
- Further characteristics (e.g. electrical endurance, switching frequency)
<https://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3TH4382-0LC8&objecttype=14&gridview=view1>

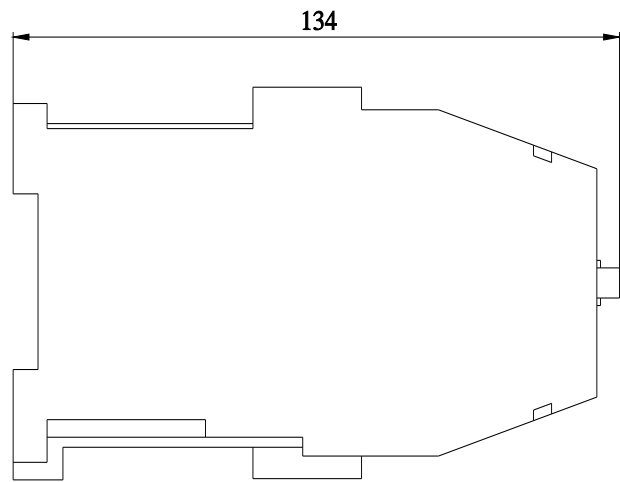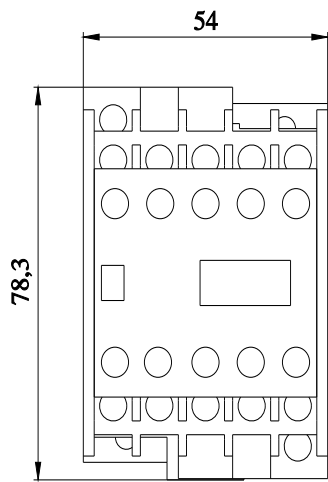

last modified:

4/2/2025 