

side mounted motor operator 24-60 V DC accessories for: 3VA51

Model	
product brand name	SENTRON
product designation	Side mounted motor operator
accessories	Lateral motorized operating mechanism
General technical data	
make time / typical	0.3 s
break time / typical	0.3 s
Voltage	
type of voltage / of the operating voltage / for actuation	AC/DC
Rated control supply voltage $U_s$ at AC 50 Hz	
• minimum	42 V
• maximum	60 V
• Rated control supply voltage $U_s$ at AC 60 Hz / minimum	42 V
• Rated control supply voltage $U_s$ at AC 60 Hz / maximum	60 V
Rated control supply voltage $U_s$ with DC	
• minimum	24 V
• maximal	60 V
operating apparent power	250 VA
Mechanical Design	
height	149 mm
width	78 mm
depth	100.3 mm
Net Weight	947 g
connectable conductor cross-section / solid	
• minimum	1.5 mm <sup>2</sup>
• maximum	2.5 mm <sup>2</sup>
connectable conductor cross-section / finely stranded / with core end processing	
• minimum	1.5 mm <sup>2</sup>
• maximum	2.5 mm <sup>2</sup>
connectable conductor cross-section / stranded	
• minimum	1.5 mm <sup>2</sup>
• maximum	2.5 mm <sup>2</sup>
tightening torque	
• minimum	0.4 N·m
• maximum	0.4 N·m
Connections according IEC	
stripped length	7 mm

## Connections according UL

<b>ambient temperature / during operation</b>	
• minimum	-25 °C
• maximum	70 °C
<b>ambient temperature / during storage</b>	
• minimum	-40 °C
• maximum	80 °C

## Certificates

### General Product Approval



EG-Konf.






[Confirmation](#)



UL

[Miscellaneous](#)



<b>EMV</b>	<b>Maritime application</b>	<b>other</b>	<b>Environment</b>		
		<a href="#">Confirmation</a>	<a href="#">Miscellaneous</a>	<a href="#">Environmental Confirmations</a>	
RCM	LRS				

### Environment

[Environmental Confirmations](#)

## Further information

### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

### Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9137-0HB10>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9137-0HB10>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



[https://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA9137-0HB10](https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9137-0HB10)

### CAX-Online-Generator

<https://www.siemens.com/cax>

### Tender specifications

<https://www.siemens.com/specifications>

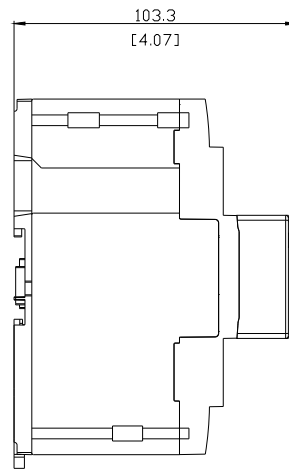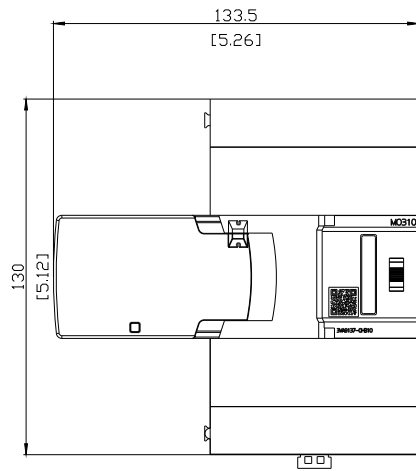

last modified:

4/4/2025 

