

wire connector TA1.3 14 AWG...1/0 3 units accessory for: 3VA61/62



Model	
product brand name	SETRON
product designation	Circular conductor terminal 1 cable 3 units
accessories	Wire connector
General technical data	
designation / of the terminal	TA1.3
type of electrical connection / with control wire tap	No
Mechanical Design	
Net Weight	109 g
Connections according IEC	
connectable conductor cross-section	
<ul style="list-style-type: none"> <li>for copper cable / stranded / minimum</li> </ul>	1.5 mm <sup>2</sup>
<ul style="list-style-type: none"> <li>for copper cable / stranded / maximum</li> </ul>	50 mm <sup>2</sup>
stripped length	18 mm
tightening torque / when using copper cables	
<ul style="list-style-type: none"> <li>solid</li> </ul>	1.5 -10 mm <sup>2</sup> : 6.2 Nm, 16 mm <sup>2</sup> : 8.5 Nm
<ul style="list-style-type: none"> <li>stranded</li> </ul>	1.5 - 10 mm <sup>2</sup> : 6.2 Nm; 16 - 35 mm <sup>2</sup> : 8.5 Nm; 50 mm <sup>2</sup> : 13.6 Nm
<ul style="list-style-type: none"> <li>finely stranded</li> </ul>	1.5 -10 mm <sup>2</sup> : 6.2 Nm, 16 - 35 mm <sup>2</sup> : 8.5 Nm
<ul style="list-style-type: none"> <li>finely stranded / with core end processing</li> </ul>	1.5 - 10 mm <sup>2</sup> : 6.2 Nm, 16 - 35 mm <sup>2</sup> : 8.5 Nm
Connections according UL	
permissible temperature / of connectable conductor / according to UL 486A-486B	75 °C
stripped length	0.7 in
connectable conductor cross-section	
<ul style="list-style-type: none"> <li>for copper cable / solid / minimum</li> </ul>	14 AWG
<ul style="list-style-type: none"> <li>for copper cable / solid / maximum</li> </ul>	10 AWG
<ul style="list-style-type: none"> <li>for copper cable / stranded / minimum</li> </ul>	14 AWG
<ul style="list-style-type: none"> <li>for copper cable / stranded / maximum</li> </ul>	1/0 AWG
<ul style="list-style-type: none"> <li>for aluminum cable / stranded / minimum</li> </ul>	8 AWG
<ul style="list-style-type: none"> <li>for aluminum cable / stranded / maximum</li> </ul>	1/0 AWG
tightening torque / when using copper cables	
<ul style="list-style-type: none"> <li>solid</li> </ul>	14-10 AWG: 55 lb-in
<ul style="list-style-type: none"> <li>stranded</li> </ul>	14 - 8 AWG: 55 lb-in; 6 - 2 AWG: 75 lb-in; 1 - 1/0 AWG: 120 lb-in
Certificates	
General Product Approval	EMV



Miscellaneous



Maritime application

other

Environment



[Confirmation](#)

[Miscellaneous](#)



[Environmental Con-  
firmations](#)

[Environmental Con-  
firmations](#)

### Further information

#### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

#### Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

#### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

#### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9143-0JB11>

#### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9143-0JB11>

#### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[https://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA9143-0JB11](https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9143-0JB11)

#### CAX-Online-Generator

<https://www.siemens.com/cax>

#### Tender specifications

<https://www.siemens.com/specifications>

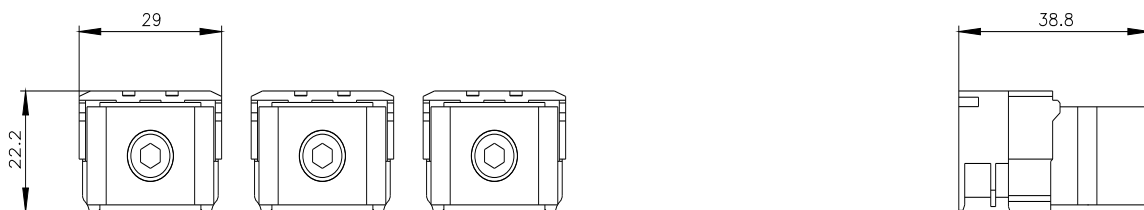

last modified:

8/8/2025

