



wire connector TA2.3 2 x 4 AWG...300 kcmil with control wire tap; for 2 cables; 3 units; incl. terminal cover extended with holes for voltage testing; accessory for: 3VA52

Model	
product brand name	SETRON
product designation	Circular conductor terminal 2 cables 3 units
accessories	Wire connector
General technical data	
designation / of the terminal	TA2.3
type of electrical connection / with control wire tap	Yes
Mechanical Design	
Net Weight	561 g
Connections according IEC	
connectable conductor cross-section	
• for copper cable / stranded / minimum	25 mm ²
• for copper cable / stranded / maximum	150 mm ²
• for aluminum cable / stranded / minimum	25 mm ²
• for aluminum cable / stranded / maximum	150 mm ²
stripped length	26 / 51 mm
tightening torque / when using copper cables	
• stranded	25 - 150 mm ² : 31.1 Nm
• finely stranded	25 - 150 mm ² : 31.1 Nm
• finely stranded / with core end processing	25 - 70 mm ² : 31.1 Nm
Connections according UL	
permissible temperature / of connectable conductor / according to UL 486A-486B	75 °C
stripped length	1.0 / 2.0 in
connectable conductor cross-section	
• for copper cable / stranded / minimum	4 AWG
• for copper cable / stranded / maximum	300 kcmil
• for aluminum cable / stranded / minimum	4 AWG
• for aluminum cable / stranded / maximum	300 kcmil
tightening torque / when using copper cables	
• stranded	4 AWG - 300 kcmil: 275 lb-in
Certificates	
General Product Approval	EMV

[Confirmation](#)

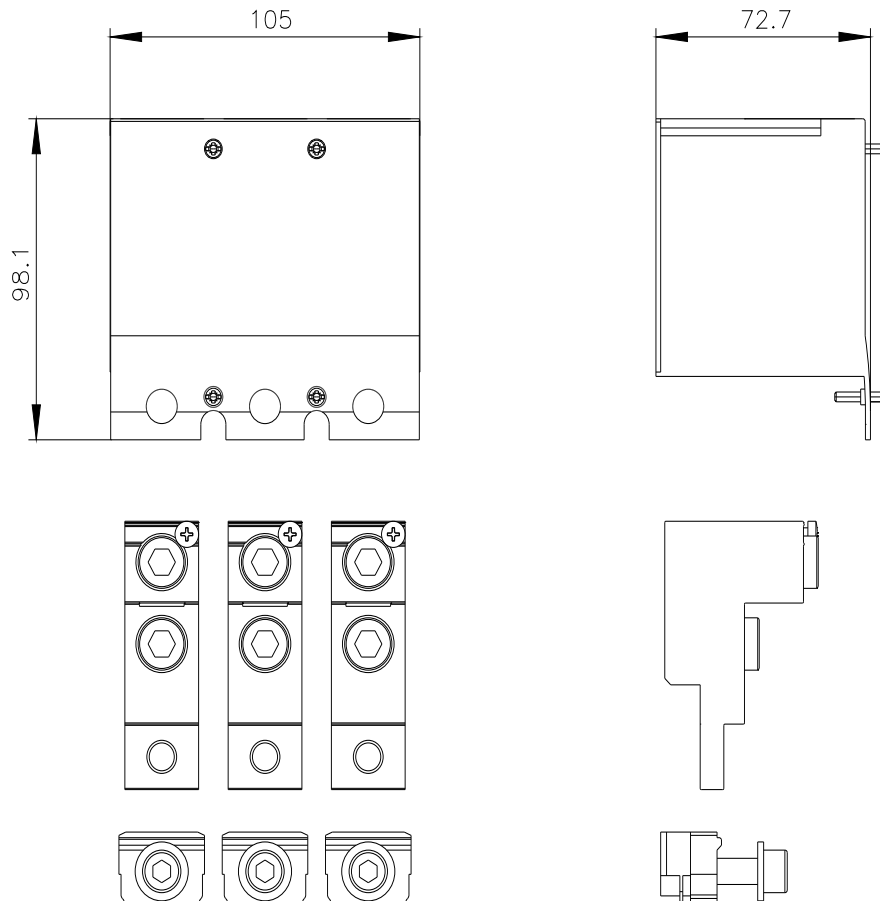


[Miscellaneous](#)





LRS

[Confirmation](#)[Miscellaneous](#)[Environmental Con-
firmations](#)[Environmental Con-
firmations](#)**Further information****Information on the packaging**<https://support.industry.siemens.com/cs/ww/en/view/109813875>**Information for data generation and storage**<https://support.industry.siemens.com/cs/ww/en/view/109995012>**Information- and Downloadcenter (Catalogs, Brochures,...)**<https://www.siemens.com/lowvoltage/catalogs>**Industry Mall (Online ordering system)**<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9233-0JC28>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<https://support.industry.siemens.com/cs/ww/en/ps/3VA9233-0JC28>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9233-0JC28**CAX-Online-Generator**<https://www.siemens.com/cax>**Tender specifications**<https://www.siemens.com/specifications>

last modified:

8/8/2025

