



circular conduc. terminal TA2.3 2 x 25...150 mm² for 2 cables with auxiliary conductor voltage tap 4 units accessory for: plug-in/withdrawable unit 3VA20/21/22

Model		
product brand name	SETRON	
product designation	circular conductor terminal	
accessories	Wire connector	
General technical data		
designation / of the terminal	TA2.3	
type of electrical connection / with control wire tap	Yes	
Mechanical Design		
Net Weight	711 g	
Connections according IEC		
connectable conductor cross-section		
<ul style="list-style-type: none"> for copper cable / stranded / minimum for copper cable / stranded / maximum for aluminum cable / stranded / minimum for aluminum cable / stranded / maximum 	25 mm ² 150 mm ² 25 mm ² 150 mm ²	
stripped length	26 / 51 mm	
tightening torque / when using copper cables		
<ul style="list-style-type: none"> stranded finely stranded finely stranded / with core end processing 	25 - 150 mm ² : 31.1 Nm 25 - 150 mm ² : 31.1 Nm 25 - 70 mm ² : 31.1 Nm	
Connections according UL		
permissible temperature / of connectable conductor / according to UL 486A-486B	75 °C	
stripped length	1.0 / 2.0 in	
connectable conductor cross-section		
<ul style="list-style-type: none"> for copper cable / stranded / minimum for copper cable / stranded / maximum for aluminum cable / stranded / minimum for aluminum cable / stranded / maximum 	4 AWG 300 kcmil 4 AWG 300 kcmil	
tightening torque / when using copper cables		
<ul style="list-style-type: none"> stranded 	4 AWG - 300 kcmil: 275 lb-in	
Certificates		
General Product Approval	EMV	Test Certificates



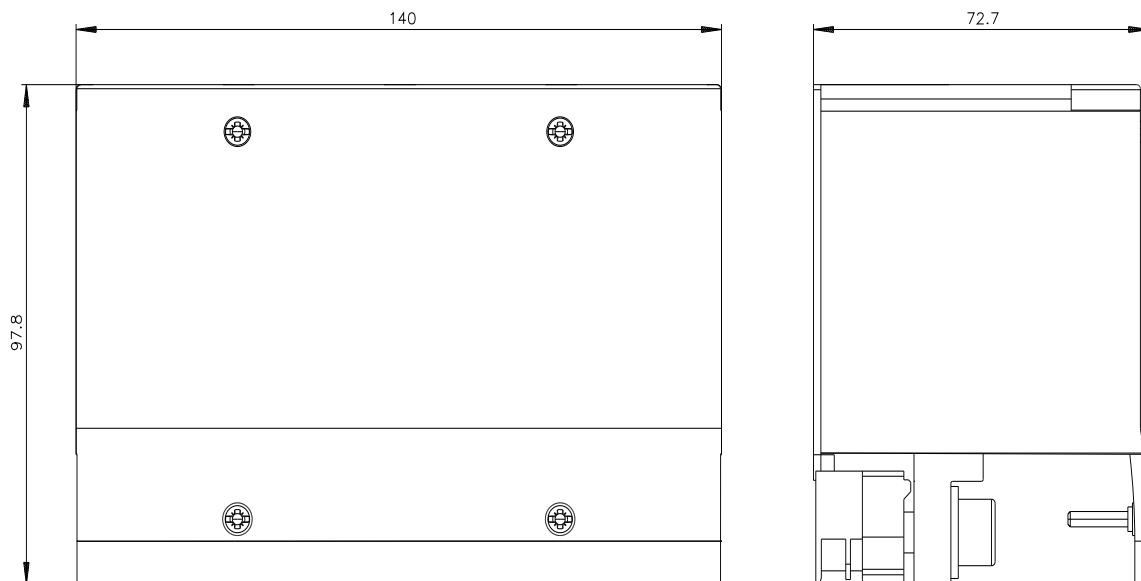
[Miscellaneous](#)



[Type Test Certificates/Test Report](#)



LRS

[Confirmation](#)[Miscellaneous](#)[Environmental Con-
firmations](#)[Environmental Con-
firmations](#)**Further information****Information on the packaging**<https://support.industry.siemens.com/cs/ww/en/view/109813875>**Information for data generation and storage**<https://support.industry.siemens.com/cs/ww/en/view/109995012>**Information- and Downloadcenter (Catalogs, Brochures,...)**<https://www.siemens.com/lowvoltage/catalogs>**Industry Mall (Online ordering system)**<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9264-0JC22>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<https://support.industry.siemens.com/cs/ww/en/ps/3VA9264-0JC22>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9264-0JC22**CAX-Online-Generator**<https://www.siemens.com/cax>**Tender specifications**<https://www.siemens.com/specifications>

last modified:

8/8/2025

