



circular conduc. terminal TA2.7 6 x 1.5...35 mm² for 6 cables; 4 units accessory for: 3VA13/14; 3VA23/24

Model	
product brand name	SETRON
product designation	Circular conductor terminal 6 cables 4 units
accessories	Wire connector
General technical data	
designation / of the terminal	TA2.7
type of electrical connection / with control wire tap	No
Mechanical Design	
Net Weight	814 g
Connections according IEC	
connectable conductor cross-section	
<ul style="list-style-type: none"> for copper cable / stranded / minimum 	1.5 mm ²
<ul style="list-style-type: none"> for copper cable / stranded / maximum 	35 mm ²
stripped length	18 / 34,5 mm
tightening torque / when using copper cables	
<ul style="list-style-type: none"> solid 	1.5 mm ² : 2.8 Nm, 2.5-10 mm ² : 6.2 Nm, 16 mm ² : 7 Nm
<ul style="list-style-type: none"> stranded 	1.5 mm ² : 2.8 Nm; 2.5 - 10 mm ² : 6.2 Nm; 16 - 35 mm ² : 7 Nm
<ul style="list-style-type: none"> finely stranded 	1.5 mm ² : 2.8 Nm, 2.5 - 10 mm ² : 6.2 Nm, 16 - 25 mm ² : 7 Nm
<ul style="list-style-type: none"> finely stranded / with core end processing 	1.5 mm ² : 2.8 Nm, 2.5 - 10 mm ² : 6.2 Nm, 16 - 25 mm ² : 7 Nm
Connections according UL	
permissible temperature / of connectable conductor / according to UL 486A-486B	75 °C
stripped length	0.7 / 1.35 in
connectable conductor cross-section	
<ul style="list-style-type: none"> for copper cable / solid / minimum 	14 AWG
<ul style="list-style-type: none"> for copper cable / solid / maximum 	10 AWG
<ul style="list-style-type: none"> for copper cable / stranded / minimum 	14 AWG
<ul style="list-style-type: none"> for copper cable / stranded / maximum 	2 AWG
<ul style="list-style-type: none"> for aluminum cable / stranded / minimum 	8 AWG
<ul style="list-style-type: none"> for aluminum cable / stranded / maximum 	2 AWG
tightening torque / when using copper cables	
<ul style="list-style-type: none"> solid 	14-10 AWG: 55 lb-in
<ul style="list-style-type: none"> stranded 	14 - 8 AWG: 55 lb-in; 6 - 2 AWG: 62 lb-in
Certificates	
General Product Approval	EMV



[Confirmation](#)

[Miscellaneous](#)



Test Certificates	Maritime application	other		Environment	
Type Test Certificates/Test Report		Confirmation	Miscellaneous	Environmental Confirmations	Environmental Confirmations

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9304-0JF60>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9304-0JF60>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9304-0JF60

CAX-Online-Generator

<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

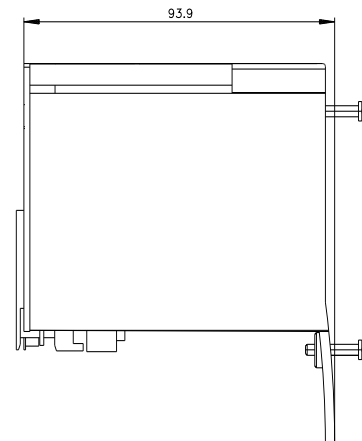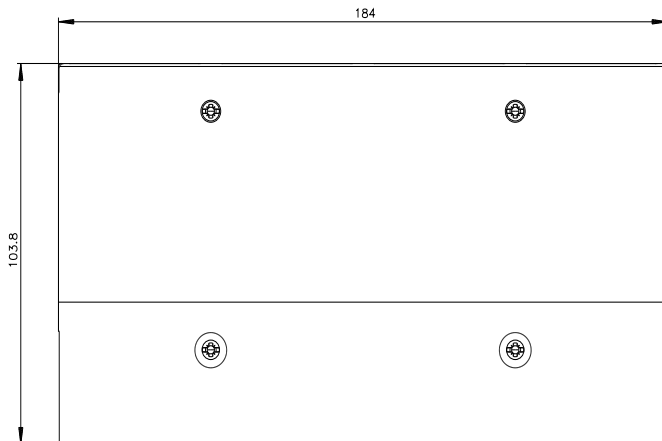

last modified:

8/8/2025

