



circular conduc. terminal TA3.2 3 x 120...185 mm<sup>2</sup> for 2 cables; 3 units accessory for: 3VA15; 3VA25

Model		
product brand name	SENTRON	
product designation	Circular conductor terminal 1 cable 3 units	
accessories	Wire connector	
General technical data		
designation / of the terminal	TA3.2	
type of electrical connection / with control wire tap	No	
Mechanical Design		
Net Weight	1.154 kg	
Connections according IEC		
connectable conductor cross-section		
<ul style="list-style-type: none"> <li>for copper cable / stranded / minimum</li> <li>for copper cable / stranded / maximum</li> <li>for aluminum cable / stranded / minimum</li> <li>for aluminum cable / stranded / maximum</li> </ul>	120 mm <sup>2</sup> 185 mm <sup>2</sup> 120 mm <sup>2</sup> 185 mm <sup>2</sup>	
stripped length	26 mm	
tightening torque / when using copper cables		
<ul style="list-style-type: none"> <li>stranded</li> <li>finely stranded / with core end processing</li> </ul>	120 - 185 mm <sup>2</sup> : 25.4 Nm 120 mm <sup>2</sup> : 25.4 Nm	
Connections according UL		
permissible temperature / of connectable conductor / according to UL 486A-486B	75 °C	
stripped length	1.02 in	
connectable conductor cross-section		
<ul style="list-style-type: none"> <li>for copper cable / stranded / minimum</li> <li>for copper cable / stranded / maximum</li> <li>for aluminum cable / stranded / minimum</li> <li>for aluminum cable / stranded / maximum</li> </ul>	4/0 AWG 400 kcmil 4/0 AWG 400 kcmil	
tightening torque / when using copper cables		
<ul style="list-style-type: none"> <li>stranded</li> </ul>	4/0 - 400 kcmil: 225 lb-in	
Certificates		
General Product Approval	EMV	Test Certificates



EG-Konf.



[Miscellaneous](#)



RCM

[Type Test Certificates/Test Report](#)

Maritime application other

Environment

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9503-0JB32>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9503-0JB32>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[https://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA9503-0JB32](https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9503-0JB32)

CAx-Online-Generator

<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

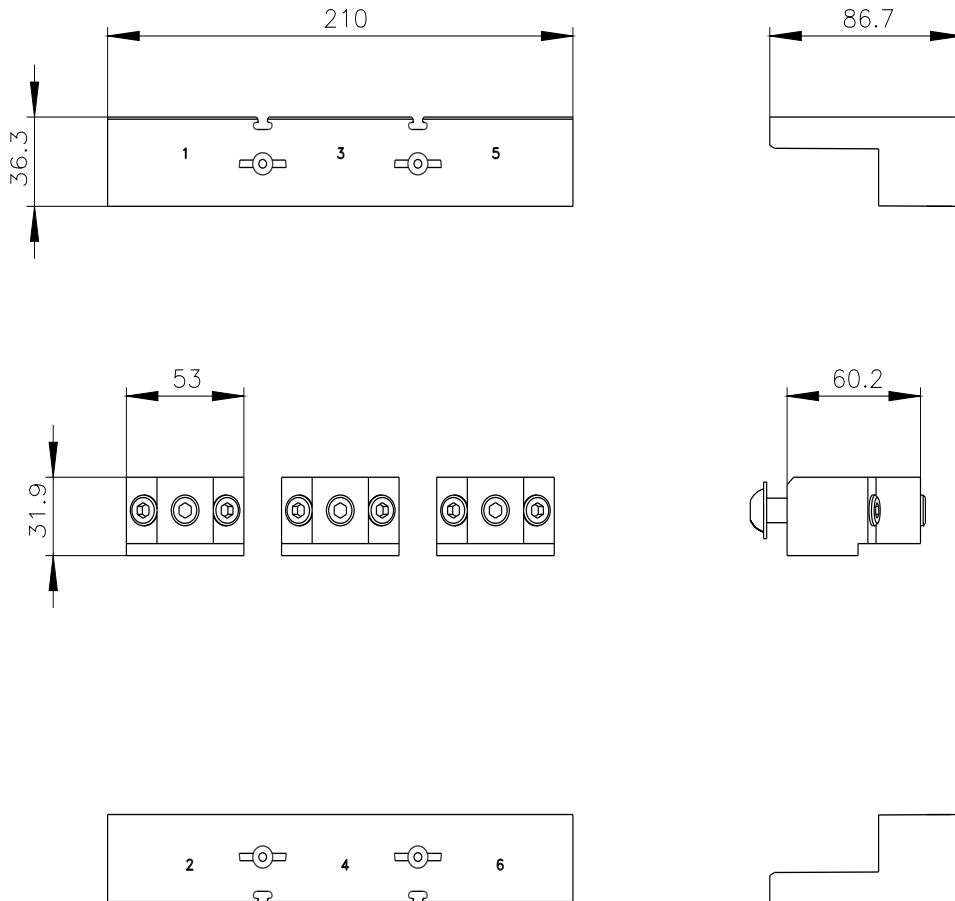

last modified:

8/8/2025

