



circular conduc. terminal TA3.2 3 x 120...185 mm² for 2 cables; 4 units accessory for: 3VA15; 3VA25

| Model | | |
|--|--|-------------------|
| product brand name | SETRON | |
| product designation | sliding bar | |
| accessories | Wire connector | |
| General technical data | | |
| designation / of the terminal | TA3.2 | |
| type of electrical connection / with control wire tap | No | |
| Mechanical Design | | |
| Net Weight | 1.411 kg | |
| Connections according IEC | | |
| connectable conductor cross-section | | |
| <ul style="list-style-type: none"> for copper cable / stranded / minimum for copper cable / stranded / maximum for aluminum cable / stranded / minimum for aluminum cable / stranded / maximum | 120 mm ² 185 mm ² 120 mm ² 185 mm ² | |
| stripped length | 26 mm | |
| tightening torque / when using copper cables | | |
| <ul style="list-style-type: none"> stranded finely stranded / with core end processing | 120 - 185 mm ² : 25.4 Nm 120 mm ² : 25.4 Nm | |
| Connections according UL | | |
| permissible temperature / of connectable conductor / according to UL 486A-486B | 75 °C | |
| stripped length | 1.02 in | |
| connectable conductor cross-section | | |
| <ul style="list-style-type: none"> for copper cable / stranded / minimum for copper cable / stranded / maximum for aluminum cable / stranded / minimum for aluminum cable / stranded / maximum | 4/0 AWG 400 kcmil 4/0 AWG 400 kcmil | |
| tightening torque / when using copper cables | | |
| <ul style="list-style-type: none"> stranded | 4/0 - 400 kcmil: 225 lb-in | |
| Certificates | | |
| General Product Approval | EMV | Test Certificates |



EG-Konf.



[Miscellaneous](#)



[Type Test Certificates/Test Report](#)

Maritime application other

Environment

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9504-0JB32>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9504-0JB32>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9504-0JB32

CAx-Online-Generator

<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

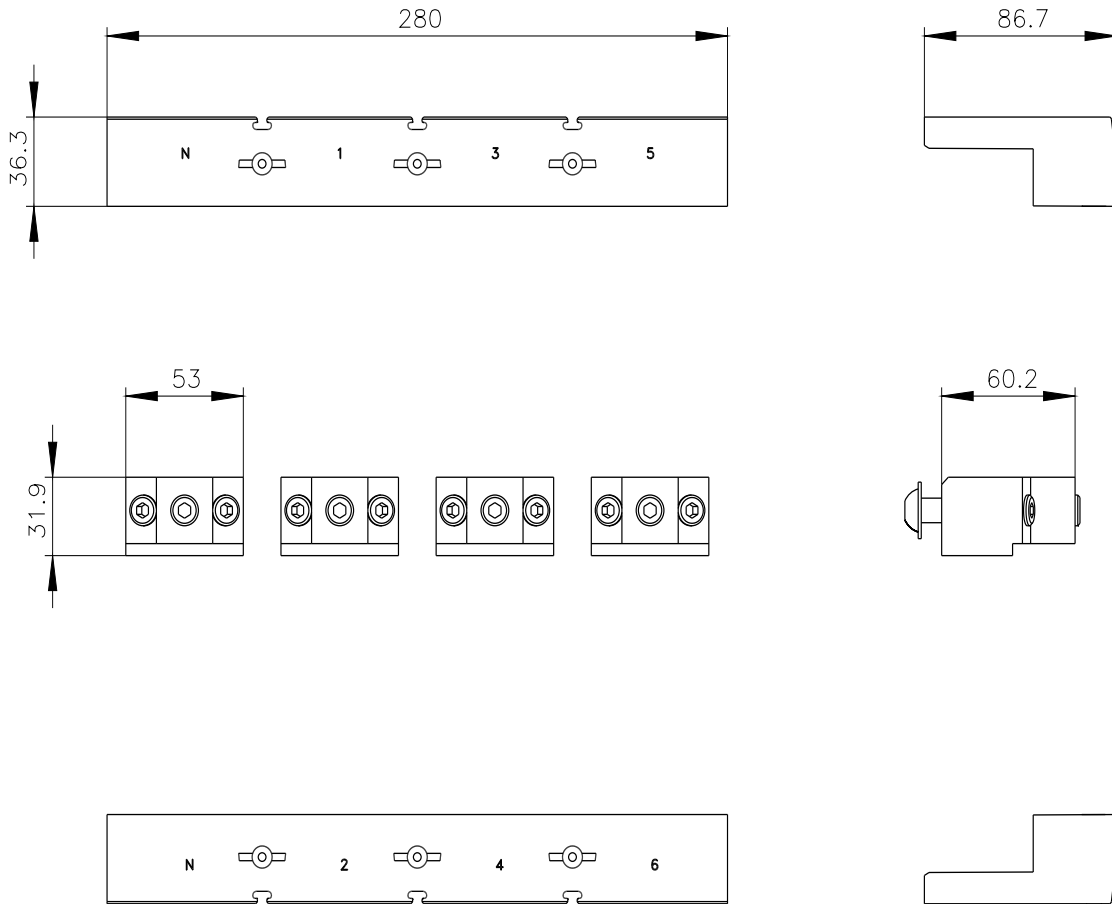

last modified:

8/8/2025

