



circular conduc. terminal TA3.1 2 x 4/0...600 kcmil for 2 cables; 4 units accessory for: 3VA55; 3VA65

Model	
product brand name	SETRON
product designation	Circular conductor terminal voltage tap, internal, 2 cables, 3 units
accessories	Wire connector
General technical data	
designation / of the terminal	TA3.1
type of electrical connection / with control wire tap	No
Mechanical Design	
Net Weight	1.536 kg
Connections according IEC	
connectable conductor cross-section	
<ul style="list-style-type: none"> <li>for copper cable / stranded / minimum</li> <li>for copper cable / stranded / maximum</li> <li>for aluminum cable / stranded / minimum</li> <li>for aluminum cable / stranded / maximum</li> </ul>	120 mm <sup>2</sup> 300 mm <sup>2</sup> 120 mm <sup>2</sup> 300 mm <sup>2</sup>
stripped length	26 mm
tightening torque / when using copper cables	
<ul style="list-style-type: none"> <li>stranded</li> <li>finely stranded</li> <li>finely stranded / with core end processing</li> </ul>	120 - 300 mm <sup>2</sup> : 42.2 Nm 185 mm <sup>2</sup> : 42.2Nm 120 - 185 mm <sup>2</sup> : 42.4 Nm
Connections according UL	
permissible temperature / of connectable conductor / according to UL 486A-486B	75 °C
stripped length	1.02 in
connectable conductor cross-section	
<ul style="list-style-type: none"> <li>for copper cable / stranded / minimum</li> <li>for copper cable / stranded / maximum</li> <li>for aluminum cable / stranded / minimum</li> <li>for aluminum cable / stranded / maximum</li> </ul>	4/0 AWG 600 kcmil 4/0 AWG 600 kcmil
tightening torque / when using copper cables	
<ul style="list-style-type: none"> <li>stranded</li> </ul>	4/0 - 600 kcmil: 375 lb-in
Certificates	
General Product Approval	



EG-Konf.



[Confirmation](#)



UL



UL

[Miscellaneous](#)

General Product Approval	EMV	Test Certificates	Maritime application	other
--------------------------	-----	-------------------	----------------------	-------



[Type Test Certificates/Test Report](#)



[Confirmation](#)

[Miscellaneous](#)

Environment



[Environmental Confirmations](#)

[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9574-0JB23>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9574-0JB23>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[https://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA9574-0JB23](https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9574-0JB23)

CAX-Online-Generator

<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

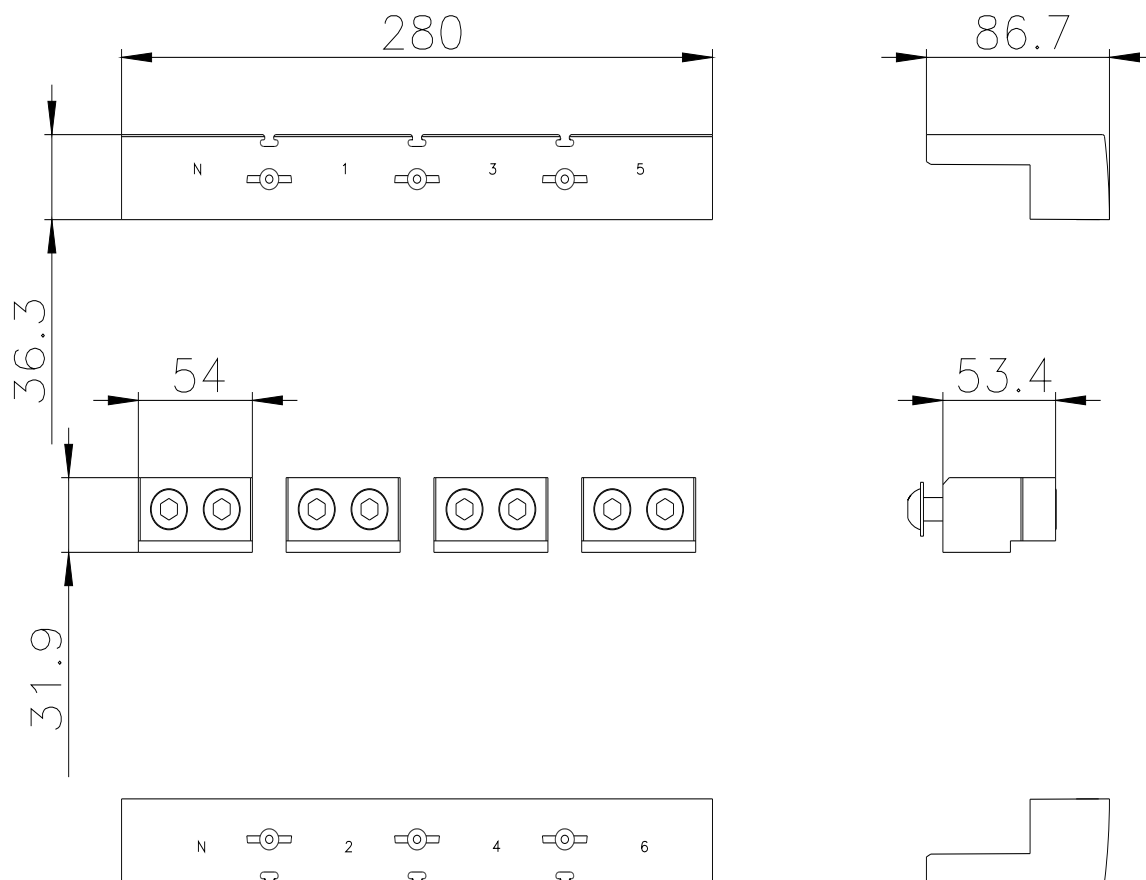

last modified:

8/8/2025



