



activation & trip box TD300 incl. connecting cable 3VA - TD300 accessory for: 3VA6

Model	
product brand name	SENTRON
product designation	Activation and trip box
accessories	Test device
General technical data	
mounting position	any
protection class IP	IP30
Current	
number of circuit breakers / directly connectable	1
Mechanical Design	
height	107 mm
width	76 mm
depth	25 mm
Net Weight	232 g
Connections according UL	
ambient temperature / during operation	
• minimum	-10 °C
• maximum	40 °C
ambient temperature / during storage	
• minimum	-40 °C
• maximum	50 °C

Certificates	
General Product Approval	EMV Test Certificates



EG-Konf.



[Miscellaneous](#)



[Type Test Certificates/Test Report](#)

Maritime application	other	Dangerous goods	Environment
----------------------	-------	-----------------	-------------



LRS

[Confirmation](#)

[Miscellaneous](#)

[Transport Information](#)

[Environmental Confirmations](#)

[Environmental Confirmations](#)

### Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9977-0MA10>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9977-0MA10>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[https://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA9977-0MA10](https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9977-0MA10)

CAX-Online-Generator

<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

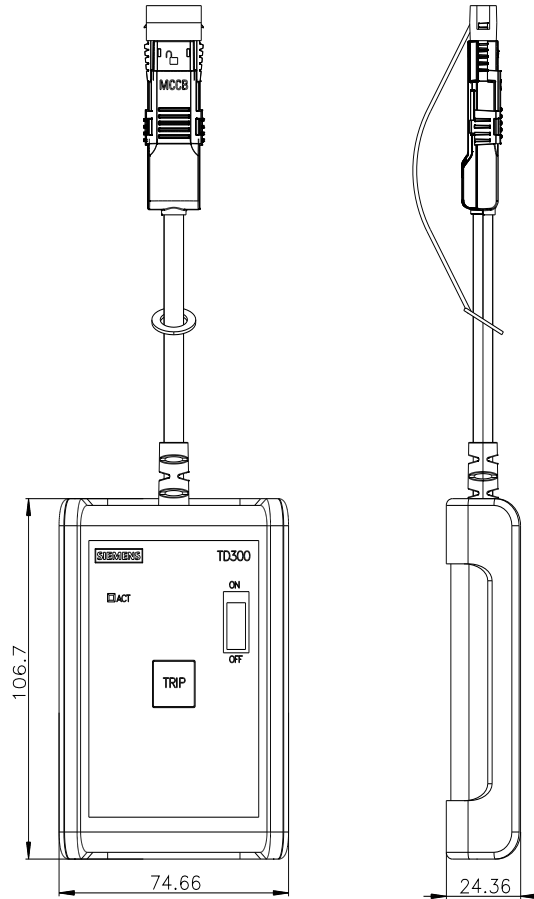

last modified:

4/3/2025 

