

Accessory 3WA/3WL Closing coil (CC) 5% OP, 110-127 V AC / 110-125 V DC momentary duty, with cut-off switch, not for continuous duty

| Model  |   |
|--|---|
| product brand name                                     | SENTRON   |
| product designation                                    | Closing coil  |
| design of the product                                  | closing coil (CC) 5% OP, 110 to 127 V AC / 110 to 125 V DC for momentary duty, with cut-off switch, no continuous duty possible |
| design of the fuse link                                | fuse gG: 4 A, miniature circuit breaker C characteristic: 4 A   |
| closing apparent power [VA]                            | 300 VA  |
| operating apparent power [VA]                          | 300 VA  |
| closing active power [W]                               | 300 W   |
| minimum command time at Us = 100%                      | 60 ms   |
| make time (electrical) of circuit breaker at Us = 100% | 50 ms   |
| control supply voltage (Us) at AC rated value          | 110 to 127 V 50/60 Hz   |
| Net Weight   | 640 g   |
| ambient temperature during operation                   |   |
| • minimum  | -40 °C  |
| • maximum  | 70 °C   |
| ambient temperature during storage                     |   |
| • minimum  | -40 °C  |
| • maximum  | 80 °C   |

| Approvals Certificates   |                       |
|--------------------------|-----------------------|
| General Product Approval | EMV Test Certificates |



[Special Test Certificate](#)

| Test Certificates   | Maritime application | other | Dangerous goods   |
|---|----------------------|-------|---|
| <a href="#">Miscellaneous</a><br><a href="#">Type Test Certificates/Test Report</a> |                      |       | <a href="#">Confirmation</a><br><a href="#">Transport Information</a> |

### Further information

Information on the packaging  
<https://support.industry.siemens.com/cs/ww/en/view/109813875>  
 Information for data generation and storage  
<https://support.industry.siemens.com/cs/ww/en/view/109995012>  
 Information- and Downloadcenter (Catalogs, Brochures,...)  
<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WA9111-0AD15>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WA9111-0AD15>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[https://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3WA9111-0AD15](https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WA9111-0AD15)

CAX-Online-Generator

<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

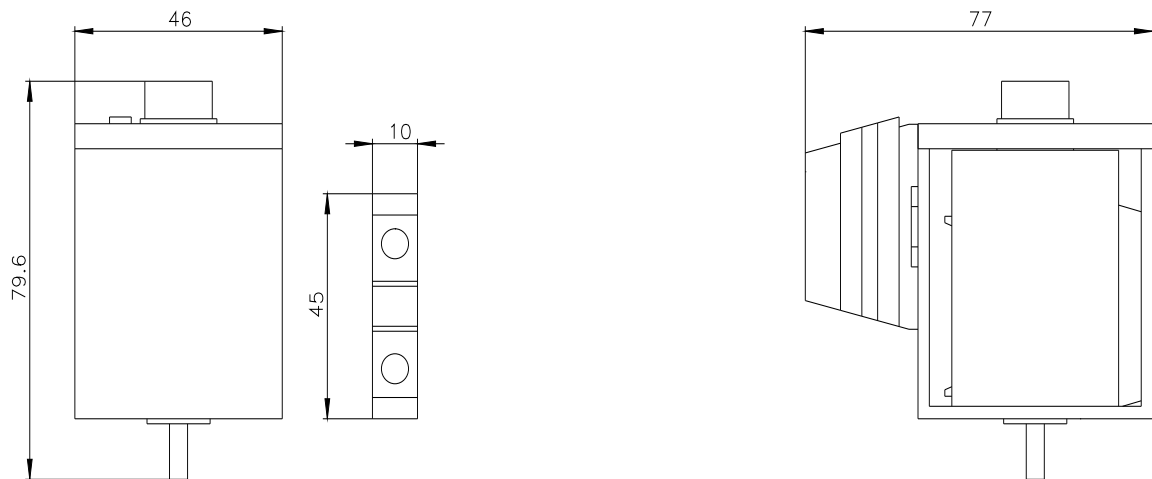

---

last modified:

4/4/2025 

