

Accessory for 3WA; Capacitor trip device for shunt trip; rated control voltage AC 50/60Hz 220 ... 240V; DC 220...250V; can also be used for 3WL, 3VL and 3VA.



Model	
product brand name	SENTRON
product designation	Capacitor trip device
design of the product	capacitor storage device
design of the fuse link	fuse gG: 1 A, miniature circuit breaker C characteristic: 2 A
storage period at Us	5 min
control supply voltage (Us) at AC rated value	200 to 240 V 50/60 Hz
Net Weight	367 g

Approvals Certificates		
General Product Approval	EMV	Test Certificates



[Confirmation](#)



[Miscellaneous](#)

Test Certificates	Maritime application	other
-------------------	----------------------	-------

[Special Test Certificate](#)



[Confirmation](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WA9111-0AD81>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WA9111-0AD81>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WA9111-0AD81

CAx-Online-Generator

<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

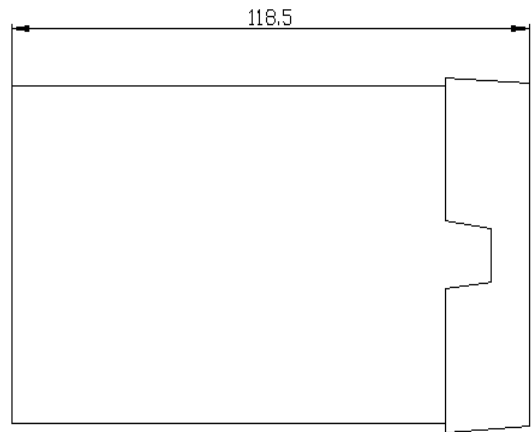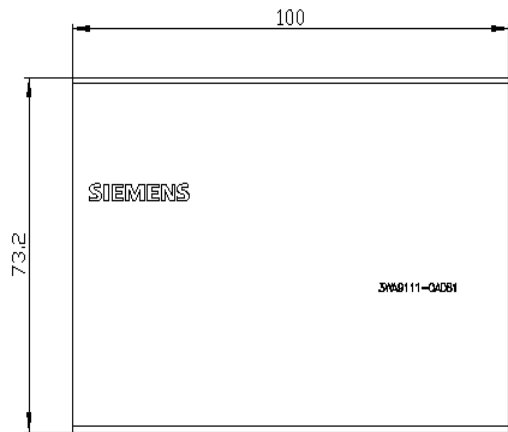

last modified:

8/5/2025 

