



plug connector type 2 N-PE U<sub>c</sub> 264 V AC, I<sub>n</sub> 40 kA, only for 5SD7424-2 (3)

Model		
product brand name	SENTRON	
product designation	Plug-in part T2	
design of the product	only for 5SD7424-2 (3)	
General technical data		
SPD classification according to EN 61643-11 Test Class II, Type 2	Yes	
SPD classification according to EN 61643-11 Test Class I, Type 1	No	
suitability for use	5SD7424-2,5SD7424-3	
Accessories		
accessories	plug connector type 2, N-PE for 5SD742 surge arrester	
Mechanical Design		
height	45 mm	
width	11.7 mm	
depth	56.4 mm	
Net Weight	75 g	
Approvals Certificates		
General Product Approval	other	Environment

[Confirmation](#)



[Confirmation](#)

[Environmental Confirmations](#)

### Environment

[Environmental Confirmations](#)

### Further information

#### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

#### Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

#### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

#### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SD7428-2>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SD7428-2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[https://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SD7428-2](https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SD7428-2)

CAx-Online-Generator

<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

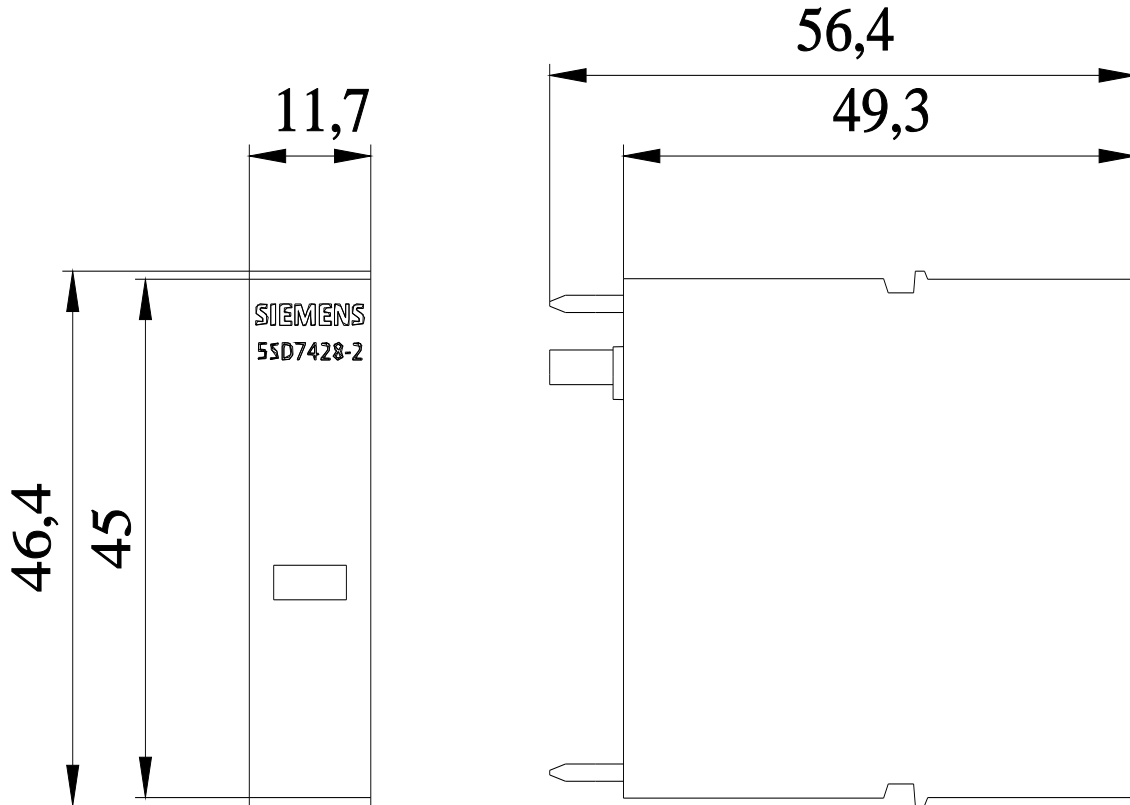

last modified:

5/26/2025 

