



NEOZED fuse-link, D02, 25 A, gR, Un AC: 400 V, Un DC: 250 V, SILIZED

Figure similar

Model		
product brand name	SENTRON	
design of the fuse link	NEOZED fuse link	
General technical data		
size of fuse system according to EN 60269-1	D02	
operating class of the fuse link	gR	
Supply voltage		
supply voltage		
• at AC	400 V	
• at DC	250 V	
operating voltage rated value	400 V	
protection class IP	IP20, with connected conductors	
switching capacity current according to IEC 60947-2 rated value	50 kA	
Dissipation		
power loss [W] for rated value of the current at AC in hot operating state per pole	8.2 W	
Main circuit		
operational current rated value	25 A	
Appearance		
color coding of the fuse link	Yellow	
maximum short-circuit current breaking capacity (I _{cu}) at AC rated value	50 kA	
Mechanical Design		
mounting position	Any, preferably vertical	
Net Weight	13 g	
ambient temperature during operation		
• minimum	-25 °C	
• maximum	40 °C	
environmental category	Up to 45°C at 95 % rel. humidity	
Approvals Certificates		
General Product Approval	other	Environment



[Confirmation](#)

[Environmental Confirmations](#)

Environment

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SE1325>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SE1325>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SE1325

CAX-Online-Generator

<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

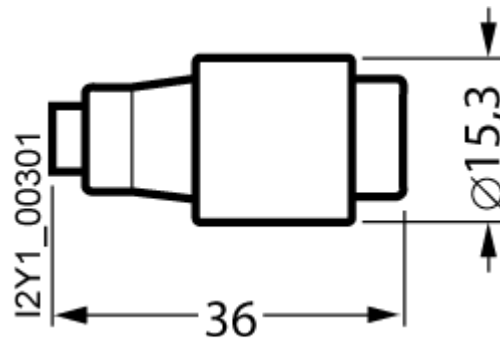

last modified:

4/10/2025

