



D0 switch disconnecter, with fuse 400 V D02 63 A 3-pole, for 60 mm busbar system with screwless terminals, with LED signal detector

Figure similar

Model		
product brand name	MINIZED	
product designation	Switch disconnectors with fuses	
design of the product	For busbar system 8US 60 mm, with LED signal detector	
General technical data		
number of poles	3	
size of fuse system according to EN 60269-1	D02	
Voltage		
surge voltage resistance rated value	6 kV	
Supply voltage		
operating voltage at AC rated value	400 V	
Protection class		
protection class IP	IP20, with connected conductors	
Dissipation		
power loss [W]	7.5 W	
<ul style="list-style-type: none"> for rated value of the current at AC in hot operating state per pole 		
Product details		
product feature sealable	Yes	
Mechanical Design		
height	79 mm	
width	27 mm	
depth	200 mm	
mounting position	any, preferably vertical	
Net Weight	378 g	
Approvals Certificates		
General Product Approval	other	Environment



[Confirmation](#)

[Environmental Conformations](#)

[Environmental Conformations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SG7234-2>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SG7234-2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SG7234-2

CAX-Online-Generator

<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

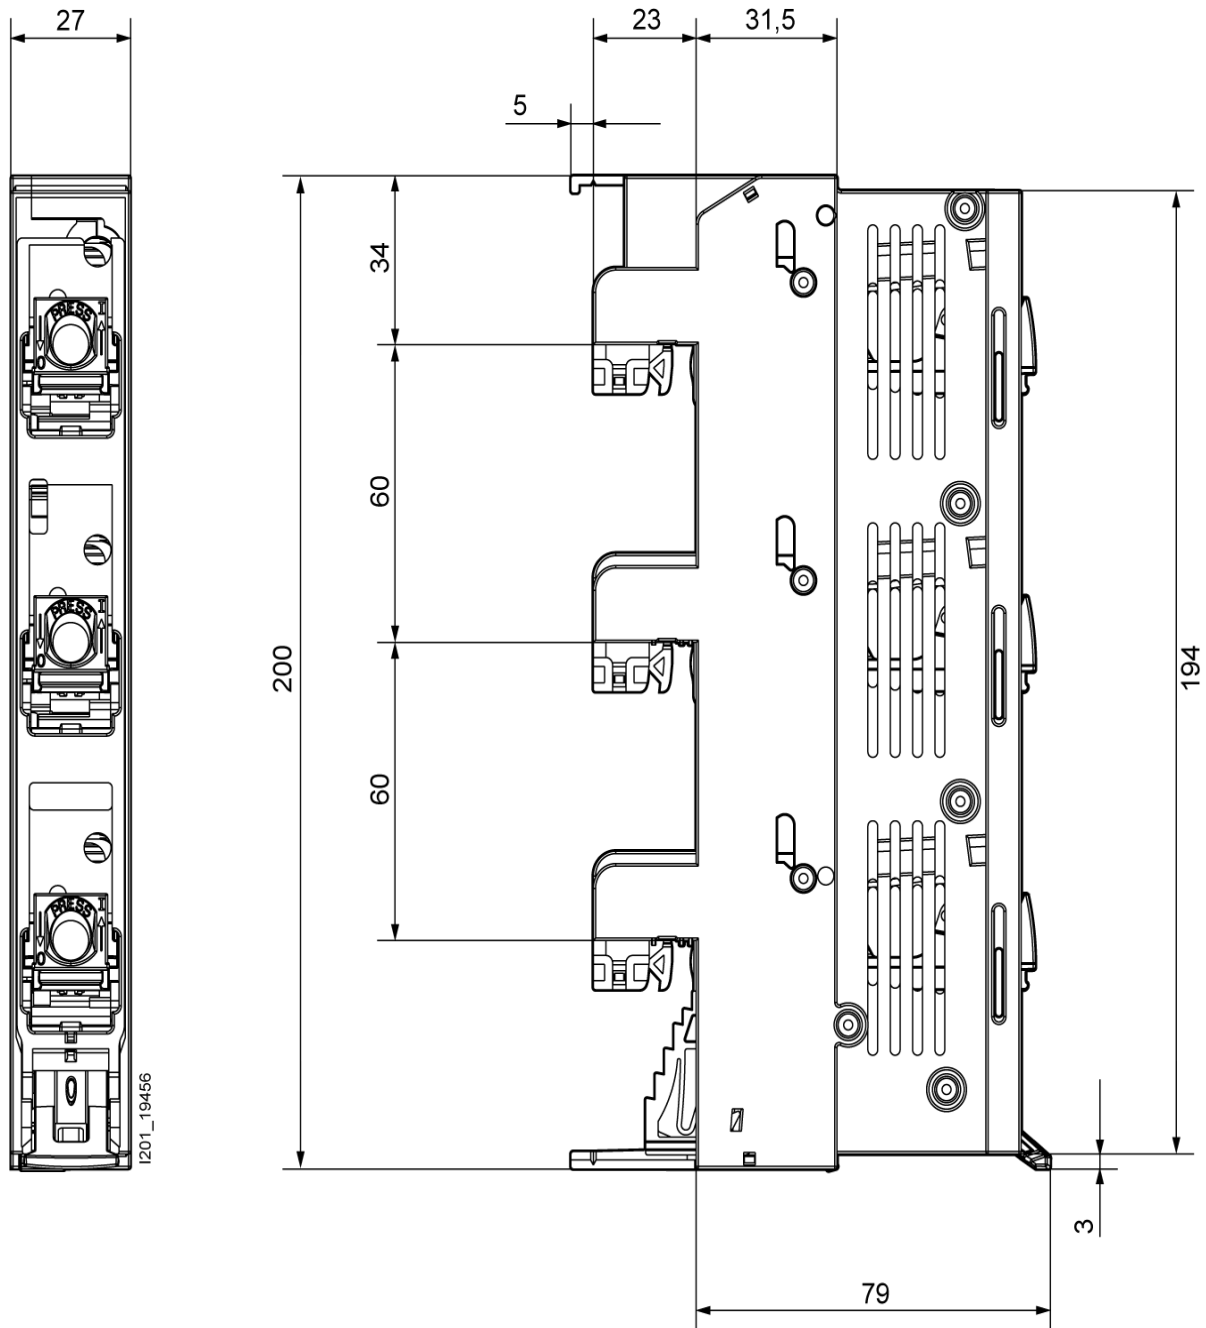

last modified:

4/12/2025

