

Pin busbar 3-phase+AUX, 1016 mm long touch-safe, 18 mm² without end caps, according to UL 508



product brand name	SETRON
product designation	Pin busbar
design of the product	16x (3PH+HS)
design of the phase tap	L1/L2/L3
General technical data	
compatibility	for MCBs 3P
design of pole	3 poles
phase number	3
operational current rated value	80 A
suitability for interaction devices with auxiliary switch	Yes
suitability for interaction devices with N conductor	No
color	light grey
Product details	
product component with end cap	No
product feature attachable arc fault detection device	No
product feature insulated	Yes
product function	
• suitable for compact devices	No
• can be cut	Yes
number of devices suitable for fitting	16
type of electrical connection	Pin
Mechanical Design	
module width	18 mm
height	23 mm
width	21 mm
length	1 000 mm
number of modular width units	56
cross-section	18 mm ²
angle of the pin of busbar	0°
Net Weight	800 g
standards according to UL	508
Approvals Certificates	
General Product Approval	



[Confirmation](#)



[Miscellaneous](#)





[Confirmation](#)

[Environmental Con-
firmations](#)

[Environmental Con-
firmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3712-0HG>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3712-0HG>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3712-0HG


CAX-Online-Generator

<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

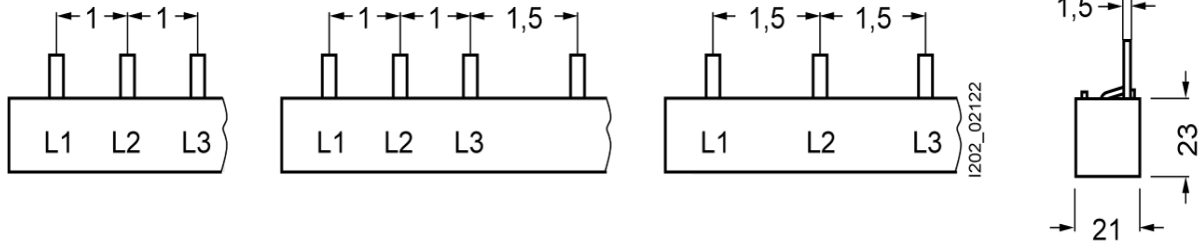



last modified:

8/8/2025 

