



Center infeed terminal 50mm² for pin busbars according to UL 508

Model	
product brand name	SETRON
product designation	Center feeder terminal
design of the product	for pin busbar 50 mm ² UL508
Supply voltage	
operating voltage at AC rated value	1 000 V
Connections	
tightening torque	
• minimum	3.5 N·m
• maximum	3.5 N·m
type of connectable conductor cross-sections for copper conductor stranded	2.5 - 50 mm ²
Mechanical Design	
height	40 mm
width	17.75 mm
length	29.8 mm
Net Weight	33 g
Approvals Certificates	
General Product Approval	other

[Confirmation](#)



[Miscellaneous](#)



[Confirmation](#)

Environment

[Environmental Confirmations](#)

[Environmental Confirmations](#)

Further information

- Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
- Information for data generation and storage
<https://support.industry.siemens.com/cs/ww/en/view/109995012>
- Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/lowvoltage/catalogs>
- Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3770-1HG>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3770-1HG>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3770-1HG

CAx-Online-Generator

<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

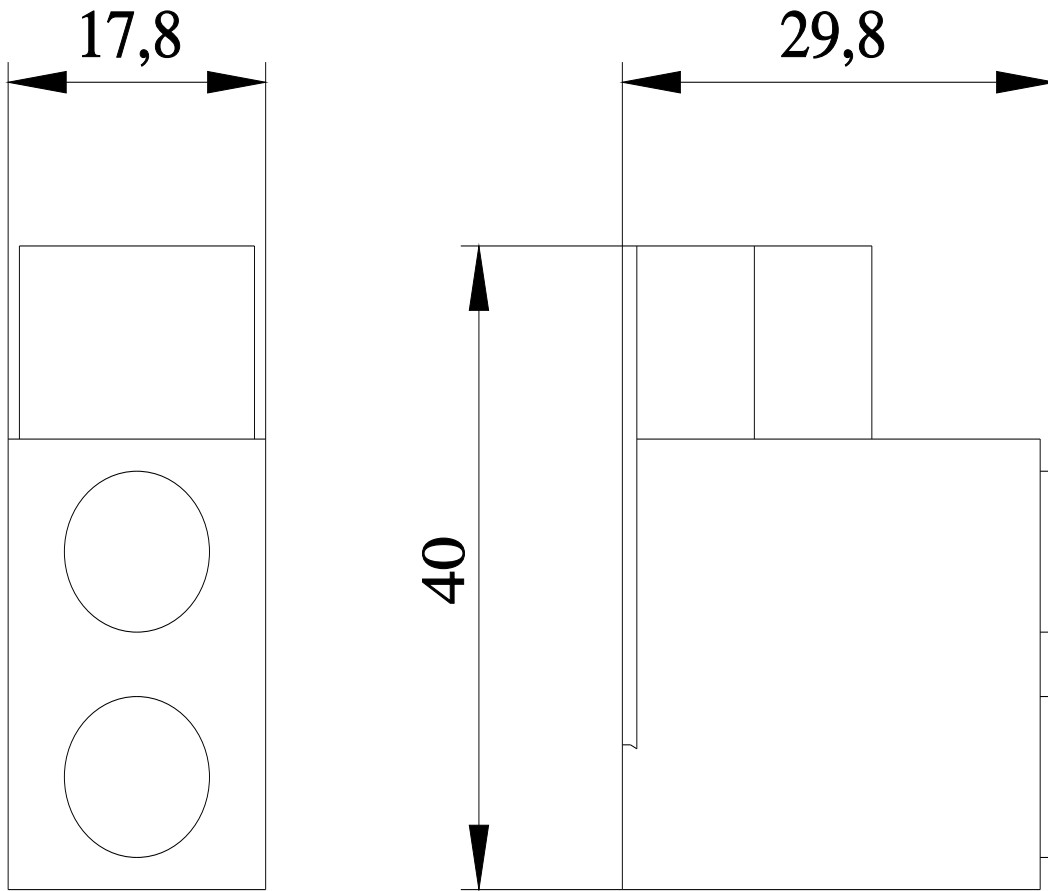

last modified:

4/11/2025 

