









RCBO, 6 kA, 2P Type A, 30 mA, B-Char, In: 10A Un: 230V

| Model | |
|--|--|
| product brand name | SENTRON |
| product designation | RCBO |
| design of the product | Instantaneous |
| General technical data | |
| number of poles | 2 |
| number of poles with protection | 2 |
| design of pole | 2P |
| tripping characteristic class | B |
| mechanical service life (operating cycles) typical | 10 000 |
| overvoltage category | 3 |
| degree of pollution | 3 |
| Voltage | |
| type of voltage of the operating voltage | AC |
| insulation voltage (Ui) rated value | 500 V |
| surge voltage resistance rated value | 4 000 V |
| surge current resistance at (8/20) μ s | 0.25 kA |
| tripping fault current rated value | 30 mA |
| <ul style="list-style-type: none"> ● operational current <ul style="list-style-type: none"> — at 30 °C rated value — at 40 °C rated value — at 45 °C rated value — at 50 °C rated value — at 55 °C rated value — at 60 °C rated value — at 70 °C rated value ● operational current at AC rated value | <ul style="list-style-type: none"> 10 A 9.6 A 9.4 A 9.1 A 8.9 A 8.6 A 8.2 A 10 A |
| residual current type | A |
| Supply voltage | |
| supply voltage <ul style="list-style-type: none"> ● at AC rated value ● for testing equipment minimum | <ul style="list-style-type: none"> 230/240 V 195 V |
| operating frequency | 50 Hz |
| supply voltage frequency rated value | 50 Hz |
| Protection class | |
| protection class IP | IP20, if the distribution board is installed, with connected conductors |
| Breaking Capacity | |
| switching capacity current | |

| | | |
|---|----------------------|-------------|
| <ul style="list-style-type: none"> • according to EN 60898 rated value | 6 kA | |
| <ul style="list-style-type: none"> • according to IEC 60947-2 rated value | 7.5 kA | |
| short-circuit current breaking capacity (I_{cn}) according to EN 61009-1 rated value | 6 kA | |
| rated residual switching capacity (I_{Δm}) according to IEC 61009-1 | 4.5 kA | |
| energy limitation class | 3 | |
| Dissipation | | |
| power loss [W] | | |
| <ul style="list-style-type: none"> • for rated value of the current at AC in hot operating state per pole | 1.03 W | |
| <ul style="list-style-type: none"> • maximum | 2.1 W | |
| Product details | | |
| product feature touch protection | Yes | |
| product component neutral conductor switching | Yes | |
| product feature halogen-free | No | |
| Connections | | |
| connectable conductor cross-section solid | | |
| <ul style="list-style-type: none"> • minimum | 1 mm ² | |
| <ul style="list-style-type: none"> • maximum | 35 mm ² | |
| connectable conductor cross-section stranded | | |
| <ul style="list-style-type: none"> • minimum | 1 mm ² | |
| <ul style="list-style-type: none"> • maximum | 35 mm ² | |
| connectable conductor cross-section finely stranded with core end processing | | |
| <ul style="list-style-type: none"> • minimum | 1 mm ² | |
| <ul style="list-style-type: none"> • maximum | 35 mm ² | |
| tightening torque with screw-type terminals | | |
| <ul style="list-style-type: none"> • minimum | 2 N·m | |
| <ul style="list-style-type: none"> • maximum | 2 N·m | |
| position of power supply cord | Either top or bottom | |
| Mechanical Design | | |
| height | 85 mm | |
| width | 36 mm | |
| depth | 72 mm | |
| installation depth | 70 mm | |
| number of modular width units | 2 | |
| mounting position | any | |
| Net Weight | 237 g | |
| weight with packaging | 251 g | |
| Environmental conditions | | |
| influence of the surrounding temperature | Max. 95% humidity | |
| ambient temperature during operation | | |
| <ul style="list-style-type: none"> • minimum | -25 °C | |
| <ul style="list-style-type: none"> • maximum | 40 °C | |
| ambient temperature during storage | | |
| <ul style="list-style-type: none"> • minimum | -40 °C | |
| <ul style="list-style-type: none"> • maximum | 70 °C | |
| number of test cycles for environmental testing according to IEC 60068-2-30 | 28 | |
| Approvals Certificates | | |
| General Product Approval | other | |
|       | | |
| other | Dangerous goods | Environment |

Further information**Information on the packaging**

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SU1326-6FP10>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SU1326-6FP10>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SU1326-6FP10

CAX-Online-Generator

<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

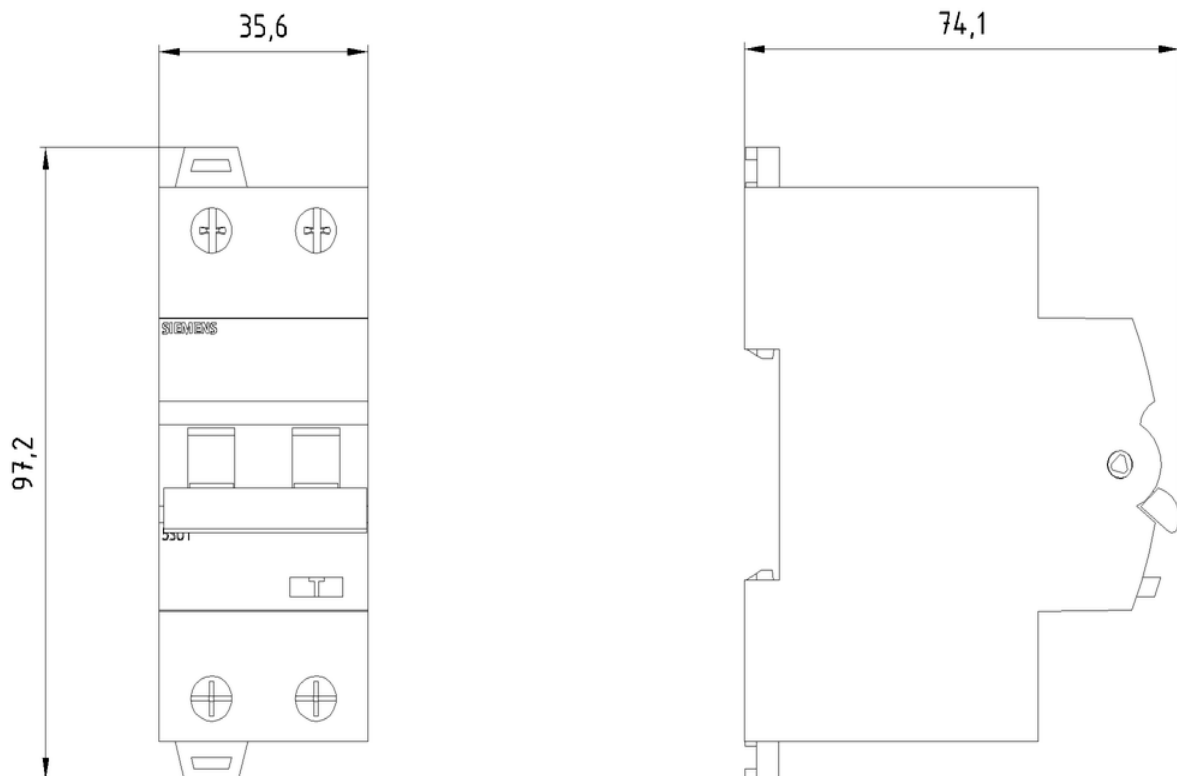

last modified:

7/22/2025 

