



residual current operated circuit breaker, 2-pole, type B, short-time-delayed, In: 25 A, 30 mA, Un AC: 230 V SIGRES: harsh ambient conditions, extended test interval

| Model | |
|--|---|
| product brand name | SENTRON |
| product designation | Residual current operated circuit breaker |
| design of the product | Short-time delayed |
| product type designation | 5SV3 |
| product version | SIGRES |
| General technical data | |
| number of poles | 2 |
| size of installation devices according to DIN 43880 | 1 |
| mechanical service life (operating cycles) typical | 10 000 |
| short-circuit current of series fuse maximum permissible | 100 A |
| short-circuit current rating | 10 kA |
| switching function short-term delayed | Yes |
| degree of pollution | 2 |
| insulation voltage (Ui) rated value | 2 000 V |
| tripping fault current rated value | 30 mA |
| let-through current permissible | 7 500 A |
| I ² t value permissible | 70 000 A ² ·s |
| Supply voltage | |
| supply voltage for testing equipment minimum | 70 V |
| value range of the supply voltage frequency | 50/60 Hz |
| value range of the operating frequency | 50/60 Hz |
| value range of the supply voltage at AC | 70-250 V |
| Protection class | |
| protection class IP | IP20, if the distribution board is installed, with connected conductors |
| Breaking Capacity | |
| switching capacity current | |
| <ul style="list-style-type: none"> according to IEC 61008-1 rated value | 0.8 kA |
| grid spacing | 60 mm |
| Dissipation | |
| power loss [W] | |
| <ul style="list-style-type: none"> for rated value of the current at AC in hot operating state per pole | 1.2 W |
| <ul style="list-style-type: none"> maximum | 2.4 W |
| Appearance | |
| RAL color number | 7 035 |
| RAL color number (similar) | 7 035 |
| Product details | |
| product feature silicon-free | Yes |

| | |
|---|--|
| product extension installable supplementary devices | Yes |
| Connections | |
| connectable conductor cross-section solid | |
| • minimum | 0.75 mm ² |
| • maximum | 35 mm ² |
| connectable conductor cross-section stranded | |
| • minimum | 0.75 mm ² |
| • maximum | 35 mm ² |
| tightening torque with screw-type terminals | |
| • minimum | 2.5 N·m |
| • maximum | 3 N·m |
| position of power supply cord | top or bottom (top for SIGRES function also in switched-off state) |

| | |
|-------------------------------|----------|
| Mechanical Design | |
| height | 90 mm |
| width | 72 mm |
| depth | 70 mm |
| installation depth | 70 mm |
| number of modular width units | 4 |
| fastening method | DIN rail |
| mounting position | any |
| Net Weight | 375 g |

| | |
|---|--------|
| Environmental conditions | |
| ambient temperature during operation | |
| • minimum | -25 °C |
| • maximum | 45 °C |
| ambient temperature during storage minimum | -40 °C |
| number of test cycles for environmental testing according to IEC 60068-2-30 | 28 |

Approvals Certificates

General Product Approval



[Miscellaneous](#)



| | | | | |
|--------------------------|-------------------|-------|---------|-----------------|
| General Product Approval | Test Certificates | other | Railway | Dangerous goods |
|--------------------------|-------------------|-------|---------|-----------------|



[Miscellaneous](#)



[Confirmation](#)

[Special Test Certificate](#)

[Transport Information](#)

Environment



[Environmental Confirmations](#)

[Environmental Confirmations](#)

Further information

- Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
- Information for data generation and storage
<https://support.industry.siemens.com/cs/ww/en/view/109995012>
- Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/lowvoltage/catalogs>
- Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SV3322-4>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/5SV3322-4>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SV3322-4


CAX-Online-Generator

<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

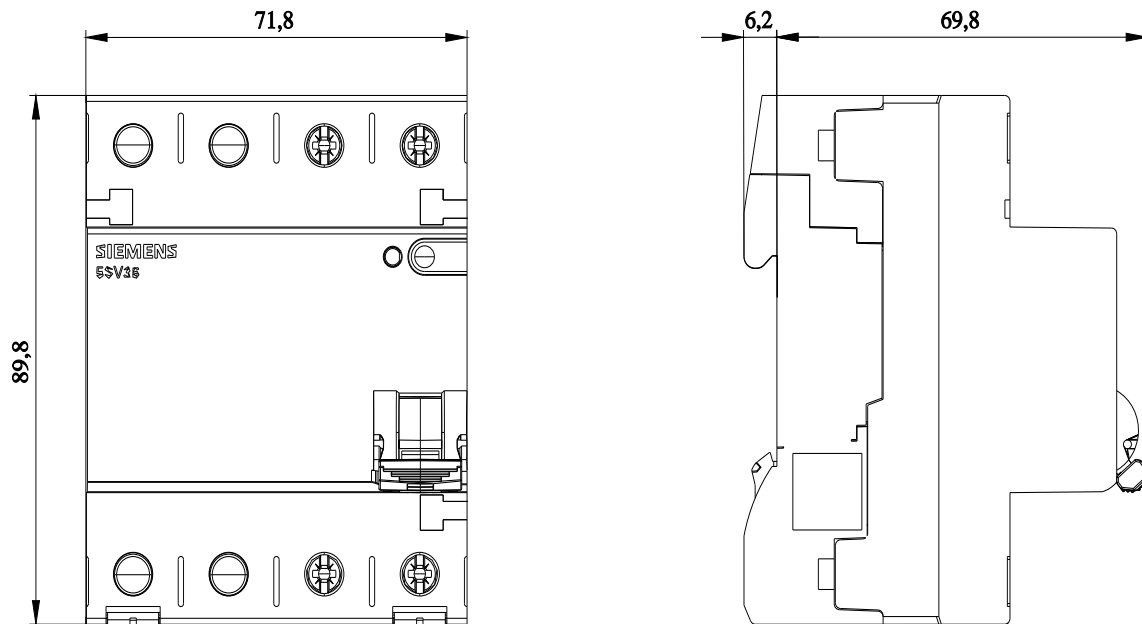

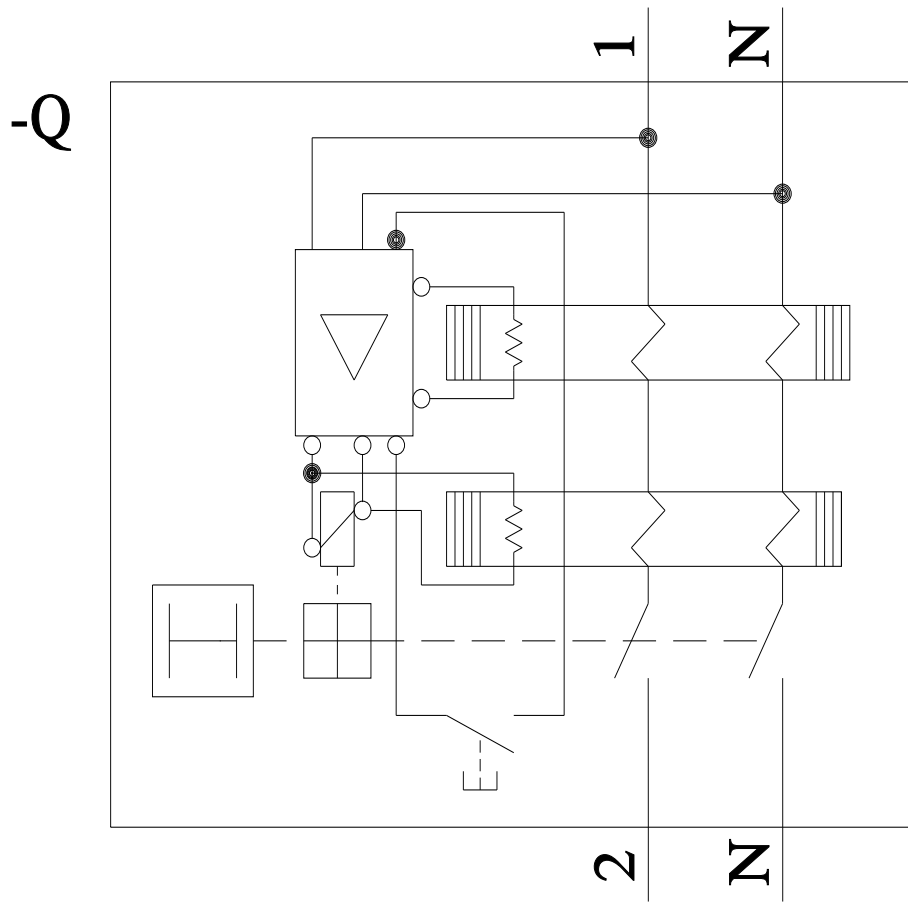

last modified:

10/9/2025 

