


product type designation

product description

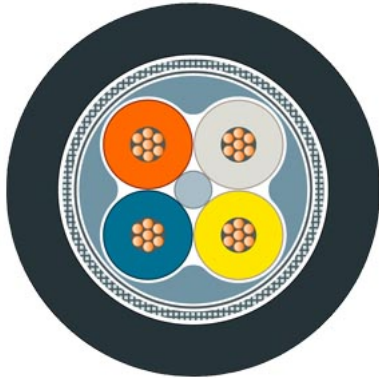

IE FC TP Food Cable 2x2 (Type C)

Flexible bus cable (4-core), sold by the meter, unassembled

Industrial Ethernet FC TP FOOD cable GP 2x2 (PROFINET type C), TP installation cable for use in the food and luxury food industry, 4-core, shielded, CAT5E, sold by the meter; delivery unit max. 1000 m, minimum order quantity: 20 m.

Technical Product Detail Page

<https://l.siemens.com/1P6XV1871-2L>

suitability for use

Food and beverages industry

cable designation

SF/UTP, 2YH (ST) C2Y 2X2X0,75/1,5-100 LI

wire length

sold by the meter

electrical data

attenuation factor per length

- at 10 MHz / maximum

0.063 dB/m

- at 100 MHz / maximum

0.213 dB/m

impedance

- at 1 MHz ... 100 MHz

100 Ω

relative symmetrical tolerance

- of the characteristic impedance at 1 MHz ... 100 MHz

5 %

near-end crosstalk per length

- at 1 MHz ... 100 MHz

0.5 dB/m

transfer impedance per length / at 10 MHz

10 mΩ/m

loop resistance per length / maximum

120 mΩ/m

operating voltage

- RMS value

80 V

NVP value in percent

69 %

mechanical data

number of electrical cores

4

design of the shield

SF/UTP, overlapped aluminum-clad foil, sheathed in a protective braided shield of tinned copper wires

type of electrical connection / FastConnect

Yes

core diameter

- of AWG22 insulated conductor

0.75 mm

outer diameter

- of inner conductor
- of the wire insulation
- of the inner sheath of the cable
- of cable sheath

0.75 mm

1.5 mm

3.9 mm

6.5 mm

symmetrical tolerance of the outer diameter / of cable sheath

0.2 mm

material

- of the wire insulation
- of the inner sheath of the cable
- of cable sheath

polyethylene (PE)

FRNC

PE

color

<ul style="list-style-type: none"> • of the insulation of data wires • of cable sheath 	white/yellow/blue/orange Black
bending radius	
<ul style="list-style-type: none"> • with single bend / minimum permissible • with multiple bends / minimum permissible 	20 mm 49 mm
tensile load / maximum	150 N
weight per length	55 kg/km

ambient conditions

ambient temperature	
<ul style="list-style-type: none"> • during operation • during storage • during transport • during installation 	-40 ... +75 °C -50 ... +75 °C -50 ... +75 °C -20 ... +60 °C
fire behavior	inflammable
class of burning behaviour / according to EN 13501-6	Fca
chemical resistance	
<ul style="list-style-type: none"> • to mineral oil • to grease • to water 	oil resistant according to IEC 60811-2-1 (4 h / 70°C) Conditional resistance Resistant
radiological resistance / to UV radiation	resistant

product features, product functions, product components / general

product feature	
<ul style="list-style-type: none"> • halogen-free • PoE capability • PoE+ capability • silicon-free 	Yes Yes Yes Yes
wire length / for Industrial Ethernet	
<ul style="list-style-type: none"> • with 100BaseTX 	100 m

standards, specifications, approvals

UL/ETL listing / 300 V Rating	No
UL/ETL style / 600 V Rating	No
certificate of suitability	
<ul style="list-style-type: none"> • EAC approval • CE marking • RoHS conformity 	Yes Yes Yes
standard for structured cabling	Cat5e
Marine classification association	
<ul style="list-style-type: none"> • American Bureau of Shipping Europe Ltd. (ABS) • French marine classification society (BV) • Det Norske Veritas (DNV) • Germanische Lloyd (GL) • Lloyds Register of Shipping (LRS) • Nippon Kaiji Kyokai (NK) • Polski Rejestr Statkow (PRS) 	No No No No No No No

further information / internet links

internet link	
<ul style="list-style-type: none"> • to website: Selection guide for cables and connectors • to web page: selection aid TIA Selection Tool • to web page: SiePortal • to website: Image database • to website: CAX-Download-Manager • to website: Industry Online Support 	https://support.industry.siemens.com/cs/ww/en/view/109766358 https://www.siemens.com/tstcloud https://sieportal.siemens.com/ https://www.automation.siemens.com/bilddb https://www.siemens.com/cax https://support.industry.siemens.com

security information

security information	Siemens provides products and solutions with industrial cybersecurity functions that support the secure operation of plants, systems, machines and networks. In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial cybersecurity concept. Siemens' products and solutions constitute one element of such a concept. Customers are responsible for preventing unauthorized access to their plants, systems, machines and networks. Such systems, machines and components should only be connected
----------------------	---

to an enterprise network or the internet if and to the extent such a connection is necessary and only when appropriate security measures (e.g. firewalls and/or network segmentation) are in place. For additional information on industrial cybersecurity measures that may be implemented, please visit www.siemens.com/cybersecurity-industry. Siemens' products and solutions undergo continuous development to make them more secure. Siemens strongly recommends that product updates are applied as soon as they are available and that the latest product versions are used. Use of product versions that are no longer supported, and failure to apply the latest updates may increase customer's exposure to cyber threats. To stay informed about product updates, subscribe to the Siemens Industrial Cybersecurity RSS Feed under <https://www.siemens.com/cert>. (V4.7)

Approvals / Certificates

General Product Approval

[Manufacturer Declaration](#)



[Declaration of Conformity](#)



[Fire safety / Physical security](#)

General Product Approval	Test Certificates	Environment	Industrial Communication
--------------------------	-------------------	-------------	--------------------------

[China RoHS](#)

[Special Test Certificate](#)

[Environmental Conformations](#)

[PROFINET](#)

last modified:

10/28/2025