


product type designation

product description

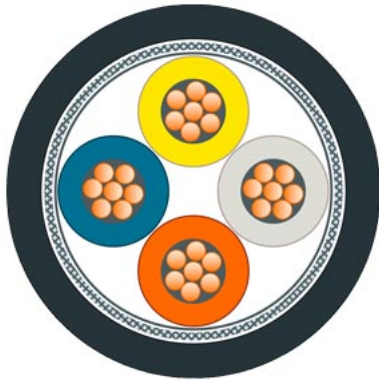

IE TP Train Cable 2x2 (Type C, AWG22/7)

Flexible bus cable with tinned copper leads (4-core) for rail applications, sold by the meter, unassembled

IE TP TRAIN Cable 2x2; CAT5 TP installation cable for Rail applications, for connection to FC RJ45 plug 2x2, FC M12 plug pro 2x2; railway-certified, 4-core, shielded, Cat5e, sold by the meter, max. delivery unit 2000 m, minimum order quantity 20 m.

Technical Product Detail Page

<https://i.siemens.com/1P6XV1871-2T>

suitability for use

For laying in rail vehicles and buses

cable designation

SF/UTP

wire length

sold by the meter

electrical data

attenuation factor per length

- at 10 MHz / maximum
- at 100 MHz / maximum

0.053 dB/m
0.188 dB/m

impedance

- at 1 MHz ... 100 MHz

100 Ω

relative symmetrical tolerance

- of the characteristic impedance at 1 MHz ... 100 MHz

5 %

near-end crosstalk per length

- at 1 MHz ... 100 MHz

0.5 dB/m

transfer impedance per length / at 10 MHz

8 mΩ/m

loop resistance per length / maximum

124 mΩ/m

operating voltage

- RMS value

125 V

mechanical data

number of electrical cores

4

design of the shield

SF/UTP, overlapped aluminum-clad foil, sheathed in a protective braided shield of tinned copper wires

type of electrical connection / FastConnect

No

core diameter

- of AWG22 insulated conductor

0.75 mm

outer diameter

- of inner conductor
- of the wire insulation
- of cable sheath

0.75 mm
1.5 mm
6.6 mm

symmetrical tolerance of the outer diameter / of cable sheath

0.2 mm

material

- of the wire insulation
- of cable sheath

polyethylene (PE)
Elastomer meshed electron beam

color

- of the insulation of data wires
- of cable sheath

white/yellow/blue/orange
Black

bending radius

<ul style="list-style-type: none"> • with single bend / minimum permissible 	40 mm
<ul style="list-style-type: none"> • with multiple bends / minimum permissible 	40 mm
tensile load / maximum	100 N
weight per length	71 kg/km
ambient conditions	
ambient temperature	
<ul style="list-style-type: none"> • during operation 	-40 ... +85 °C
<ul style="list-style-type: none"> • during storage 	-40 ... +85 °C
<ul style="list-style-type: none"> • during transport 	-40 ... +85 °C
<ul style="list-style-type: none"> • during installation 	-25 ... +70 °C
fire behavior	BS 6853 cable internal Ia, Ib, II, cable external Ia, Ib, II, DIN 5510-2 fire protection level 1-4, EN 45545-2 Hazard Level HL 1-HL 3, EN 50306-4, NF F 16-101, NFPA 130, PN-K-02511 Class A, UIC 564-2 Class A
chemical resistance	
<ul style="list-style-type: none"> • to mineral oil 	EN 50306-4 (72h/100 °C, method B volume concentration 200x10-6, 72h/100 °C IRM 902, 168h/70 °C IRM 903), DIN 51900
<ul style="list-style-type: none"> • to grease 	Conditional resistance
<ul style="list-style-type: none"> • to water 	conditional resistance
radiological resistance / to UV radiation	resistant
product features, product functions, product components / general	
product feature	
<ul style="list-style-type: none"> • halogen-free 	Yes
<ul style="list-style-type: none"> • PoE capability 	Yes
<ul style="list-style-type: none"> • PoE+ capability 	Yes
<ul style="list-style-type: none"> • silicon-free 	Yes
wire length / for Industrial Ethernet	
<ul style="list-style-type: none"> • with 100BaseTX 	100 m
standards, specifications, approvals	
UL/ETL listing / 300 V Rating	No
UL/ETL style / 600 V Rating	No
certificate of suitability	
<ul style="list-style-type: none"> • EAC approval 	Yes
<ul style="list-style-type: none"> • CE marking 	Yes
<ul style="list-style-type: none"> • RoHS conformity 	Yes
standard for structured cabling	Cat5
Marine classification association	
<ul style="list-style-type: none"> • American Bureau of Shipping Europe Ltd. (ABS) 	No
<ul style="list-style-type: none"> • French marine classification society (BV) 	No
<ul style="list-style-type: none"> • Det Norske Veritas (DNV) 	No
<ul style="list-style-type: none"> • Germanische Lloyd (GL) 	No
<ul style="list-style-type: none"> • Lloyds Register of Shipping (LRS) 	No
<ul style="list-style-type: none"> • Nippon Kaiji Kyokai (NK) 	No
<ul style="list-style-type: none"> • Polski Rejestr Statkow (PRS) 	No
further information / internet links	
internet link	
<ul style="list-style-type: none"> • to website: Selection guide for cables and connectors 	https://support.industry.siemens.com/cs/ww/en/view/109766358
<ul style="list-style-type: none"> • to web page: selection aid TIA Selection Tool 	https://www.siemens.com/tstcloud
<ul style="list-style-type: none"> • to web page: SiePortal 	https://sieportal.siemens.com/
<ul style="list-style-type: none"> • to website: Image database 	https://www.automation.siemens.com/bilddb
<ul style="list-style-type: none"> • to website: CAX-Download-Manager 	https://www.siemens.com/cax
<ul style="list-style-type: none"> • to website: Industry Online Support 	https://support.industry.siemens.com
security information	
security information	Siemens provides products and solutions with industrial cybersecurity functions that support the secure operation of plants, systems, machines and networks. In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial cybersecurity concept. Siemens' products and solutions constitute one element of such a concept. Customers are responsible for preventing unauthorized access to their plants, systems, machines and networks. Such systems, machines and components should only be connected to an enterprise network or the internet if and to the extent such a connection is necessary and only when appropriate security measures (e.g. firewalls and/or

network segmentation) are in place. For additional information on industrial cybersecurity measures that may be implemented, please visit www.siemens.com/cybersecurity-industry. Siemens' products and solutions undergo continuous development to make them more secure. Siemens strongly recommends that product updates are applied as soon as they are available and that the latest product versions are used. Use of product versions that are no longer supported, and failure to apply the latest updates may increase customer's exposure to cyber threats. To stay informed about product updates, subscribe to the Siemens Industrial Cybersecurity RSS Feed under <https://www.siemens.com/cert>. (V4.7)

Approvals / Certificates

General Product Approval



[Declaration of Conformity](#)



[China RoHS](#)

[Manufacturer Declaration](#)

Environment

[Environmental Confirmations](#)

last modified:

10/28/2025 