



undervoltage release 380-400 V AC 50/60 Hz accessory for: 3VA1 and 3VA20-26

Model		
product brand name	SENTRON	
product designation	Auxiliary release	
accessories	Auxiliary release	
General technical data		
degree of pollution	3	
overvoltage category	III	
apparent power consumption / maximum	2.5 VA	
Voltage		
surge voltage resistance	4 kV	
Mechanical Design		
height	65.1 mm	
width	25.7 mm	
number of slots	3	
depth	28.8 mm	
net weight	91 g	
Net Weight	81 g	
tightening torque / with screw-type terminals / minimum	0.4 N·m	
tightening torque / with screw-type terminals / maximum	0.5 N·m	
Connections according IEC		
stripped length	10 mm	
connectable conductor cross-section	0.5 ... 1.5	
<ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>		
AWG number / as coded connectable conductor cross section / for auxiliary contacts		
<ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>	<p>20</p> <p>16</p>	
Connections according UL		
stripped length [in]	0.4 in	
tightening torque [lbf·in] / with screw-type terminals / minimum	3.5 lbf·in	
tightening torque [lbf·in] / with screw-type terminals / maximum	4.4 lbf·in	
Certificates		
General Product Approval	EMV	Test Certificates



Miscellaneous



Miscellaneous

Test Certificates	Maritime application	other		Environment	
<a href="#">Type Test Certificates/Test Report</a>		<a href="#">Confirmation</a>	<a href="#">Miscellaneous</a>	<a href="#">Environmental Confirmations</a>	<a href="#">Environmental Confirmations</a>

### Further information

#### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

#### Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

#### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

#### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9908-0BB26>

#### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9908-0BB26>

#### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



[https://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA9908-0BB26](https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9908-0BB26)


#### CAX-Online-Generator

<https://www.siemens.com/cax>

#### Tender specifications

<https://www.siemens.com/specifications>

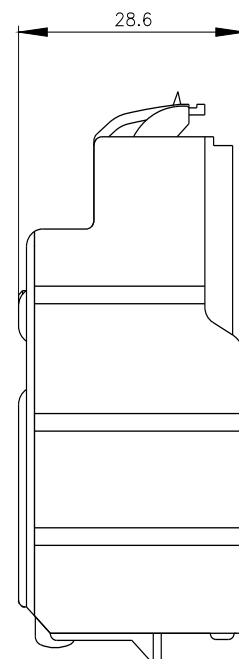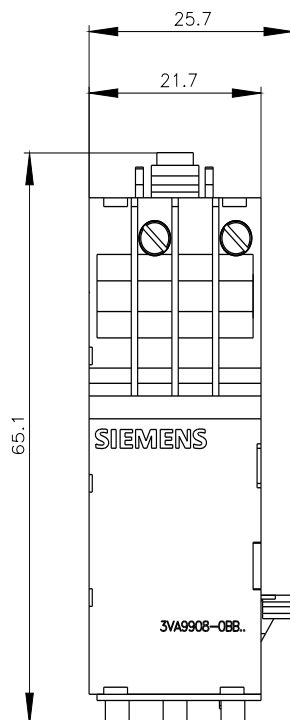

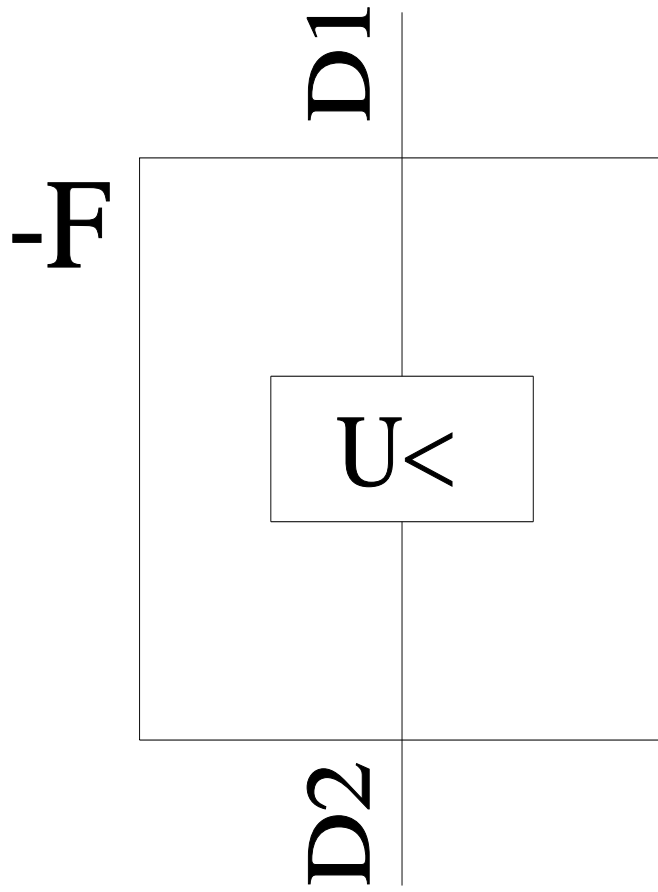

last modified:

5/26/2025 

