



Accessory Circuit breaker 3WA, Front connection DIN 43681 double hole, bottom, 1 piece frame size 2 - up to 2000 A AC and for 1000A and 2000A DC, for circuit breaker in fixed mounted design

Model	
product brand name	SENTRON
product designation	Front connection
design of the product	front connection for fixed-mounted circuit breakers

General technical data	
size of the circuit-breaker	2
switching capacity class of the circuit breaker	S, M, H, E, D
Net Weight	2 kg

Approvals Certificates		
General Product Approval	EMV	Test Certificates



[Confirmation](#)



[Special Test Certificate](#)

Test Certificates	Maritime application	other	Dangerous goods
-------------------	----------------------	-------	-----------------

[Miscellaneous](#)





[Confirmation](#)

[Dangerous goods information](#)

Further information

- Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
- Information for data generation and storage
<https://support.industry.siemens.com/cs/ww/en/view/109995012>
- Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/lowvoltage/catalogs>
- Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WA9111-0AL24>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3WA9111-0AL24>
- Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WA9111-0AL24
- CAX-Online-Generator
<https://www.siemens.com/cax>
- Tender specifications
<https://www.siemens.com/specifications>

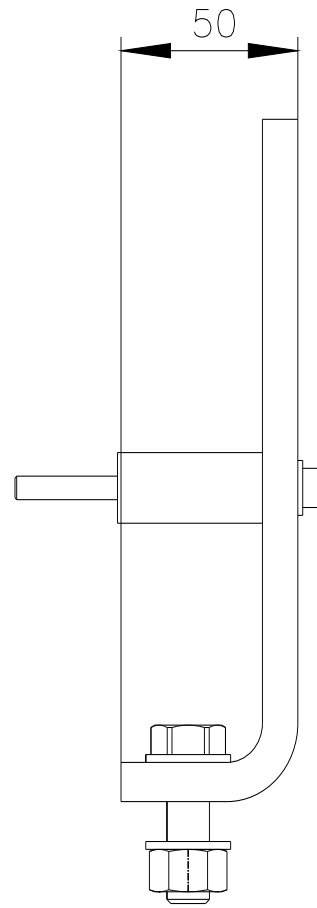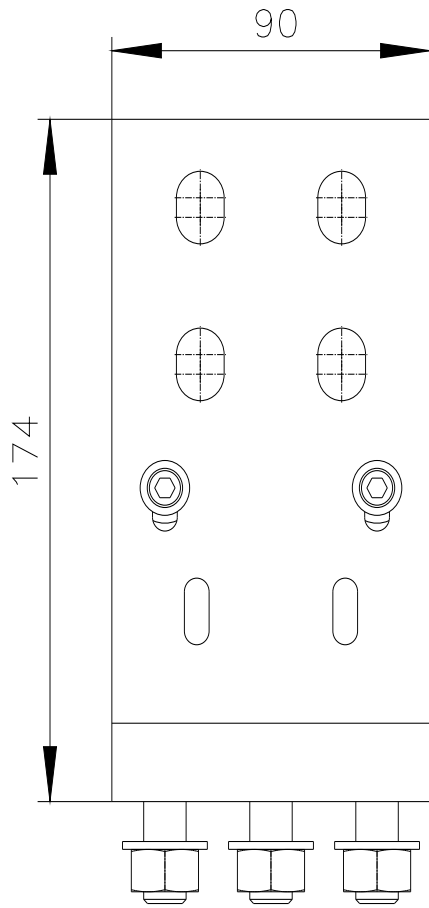

last modified:

4/13/2025 

