



Accessory Circuit breaker 3WA, Front connection DIN 43677 double hole, top or bottom frame size 2 - 3200 A AC and 4000A DC for circuit breaker in withdrawable design, 1 piece

| Model | |
|-----------------------|--|
| product brand name | SENTRON |
| product designation | Front connection |
| design of the product | front connection for withdrawable circuit breakers |

| General technical data | |
|---|---------------|
| size of the circuit-breaker | 2 |
| switching capacity class of the circuit breaker | S, M, H, E, D |
| Net Weight | 3.6 kg |

| Approvals Certificates | | |
|--------------------------|-----|-------------------|
| General Product Approval | EMV | Test Certificates |



[Confirmation](#)



[Miscellaneous](#)

| Test Certificates | Maritime application | other |
|-------------------|----------------------|-------|
|-------------------|----------------------|-------|

[Special Test Certificate](#)



[Type Test Certificates/Test Report](#)



[Confirmation](#)

Further information

- Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
- Information for data generation and storage
<https://support.industry.siemens.com/cs/ww/en/view/109995012>
- Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/lowvoltage/catalogs>
- Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WA9111-0AN23>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3WA9111-0AN23>
- Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WA9111-0AN23
- CAX-Online-Generator
<https://www.siemens.com/cax>
- Tender specifications
<https://www.siemens.com/specifications>

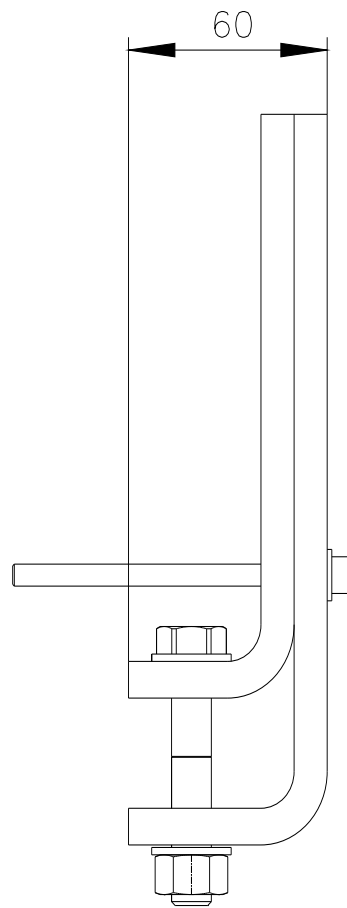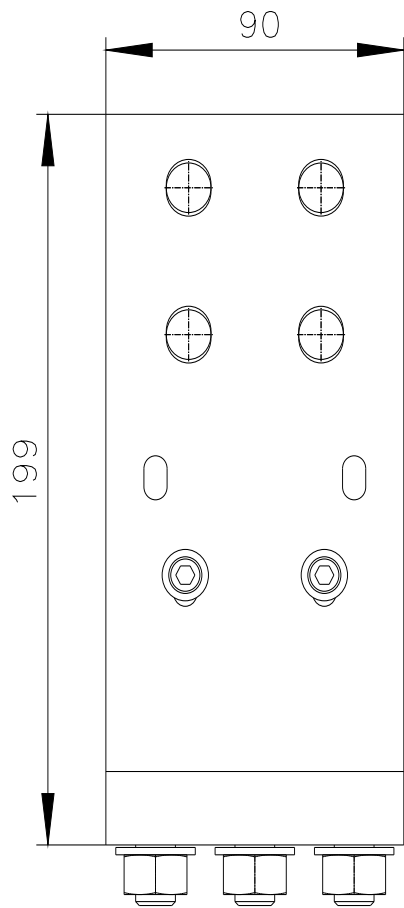

last modified:

4/13/2025 

