









capacitor contactor, AC-6b 20 kVA<sub>r</sub>, / 400 V, 3-pole, 110 V DC, auxiliary contacts:  
1 NO + 2 NC, screw terminal, size: S0

product brand name	SIRIUS
product designation	capacitor contactors
product type designation	3RT26
<b>General technical data</b>	
size of contactor	S0
product extension auxiliary switch	No
<b>power loss [W] for rated value of the current</b>	
• at AC in hot operating state per pole	1.6 W
• without load current share typical	5.9 W
<b>type of calculation of power loss depending on pole</b>	quadratic
<b>insulation voltage</b>	
• of main circuit with degree of pollution 3 rated value	690 V
• of auxiliary circuit with degree of pollution 3 rated value	690 V
<b>surge voltage resistance</b>	
• of main circuit rated value	6 kV
• of auxiliary circuit rated value	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	400 V
<b>shock resistance at rectangular impulse</b>	
• at DC	10g / 5 ms, 7,5g / 10 ms
<b>shock resistance with sine pulse</b>	
• at DC	15g / 5 ms, 10g / 10 ms
<b>mechanical service life (operating cycles)</b>	
• of the contactor with added auxiliary switch block typical	3 000 000
<b>electrical endurance (operating cycles)</b>	200 000
<b>reference code according to IEC 81346-2</b>	Q
<b>Substance Prohibition (Date)</b>	05/01/2014
<b>Weight</b>	0.72 kg
<b>Ambient conditions</b>	
installation altitude at height above sea level maximum	2 000 m
<b>ambient temperature</b>	
• during operation	-25 ... +60 °C
• during storage	-55 ... +80 °C
<b>relative humidity minimum</b>	10 %
<b>relative humidity at 55 °C according to IEC 60068-2-30 maximum</b>	95 %
<b>Environmental footprint</b>	
Environmental Product Declaration (EPD)	Yes
global warming potential [CO <sub>2</sub> eq] total	106 kg
global warming potential [CO <sub>2</sub> eq] during manufacturing	2.47 kg
global warming potential [CO <sub>2</sub> eq] during operation	104 kg

global warming potential [CO2 eq] after end of life	-0.226 kg
<b>Main circuit</b>	
number of poles for main current circuit	3
number of NO contacts for main contacts	3
number of NC contacts for main contacts	0
operational current at AC-6b at 690 V at ambient temperature 60 °C rated value	29 A
<b>operating reactive power at AC-6b</b>	
• at 230 V at 50/60 Hz at ambient temperature 60 °C rated value	4 ... 11.5 kvar
• at 400 V at 50/60 Hz at ambient temperature 60 °C rated value	7 ... 20 kvar
• at 500 V at 50/60 Hz at ambient temperature 60 °C rated value	8 ... 25 kvar
• at 690 V at 50/60 Hz at ambient temperature 60 °C rated value	11 ... 34 kvar
<b>no-load switching frequency</b>	
• at DC	500 1/h
<b>operating frequency at AC-6b</b>	
• at 230 V maximum	100 1/h
• at 240 V maximum	100 1/h
• at 400 V maximum	100 1/h
• at 480 V maximum	100 1/h
• at 500 V maximum	100 1/h
• at 600 V maximum	100 1/h
• at 690 V maximum	100 1/h
<b>Control circuit/ Control</b>	
type of voltage	DC
type of voltage of the control supply voltage	DC
control supply voltage at DC rated value	110 V
<b>operating range factor control supply voltage rated value of magnet coil at DC</b>	
• initial value	0.8
• full-scale value	1.1
<b>closing power of magnet coil at DC</b>	5.9 W
<b>holding power of magnet coil at DC</b>	5.9 W
<b>closing delay</b>	
• at DC	50 ... 170 ms
<b>opening delay</b>	
• at DC	15 ... 18 ms
<b>arcing time</b>	10 ... 10 ms
<b>control version of the switch operating mechanism</b>	Standard A1 - A2
<b>Auxiliary circuit</b>	
<b>number of NC contacts for auxiliary contacts</b>	2
• attachable	0
• instantaneous contact	2
<b>number of NO contacts for auxiliary contacts</b>	1
• attachable	0
• instantaneous contact	1
<b>operational current of auxiliary contacts at AC-12 maximum</b>	10 A
<b>operational current of auxiliary contacts at AC-15</b>	
• at 230 V	6 A
• at 400 V	3 A
• at 690 V	1 A
<b>operational current of auxiliary contacts at DC-13</b>	
• at 24 V	6 A
• at 60 V	2 A
• at 110 V	1 A
• at 125 V	0.9 A
• at 220 V	0.3 A
<b>contact reliability of auxiliary contacts</b>	0.00000001
<b>UL/CSA ratings</b>	

<b>contact rating of auxiliary contacts according to UL</b>	A600 / Q600	
<b>Category Control Number (CCN)</b>	E31519 (NLDX, NLDX7)	
<b>Short-circuit protection</b>		
design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V	C characteristic: 10 A; 0.4 kA	
<b>design of the fuse link</b>		
<ul style="list-style-type: none"> <li>for short-circuit protection of the main circuit with type of coordination 1 required</li> </ul>	gG: 63 A (690 V, 50 kA)	
<ul style="list-style-type: none"> <li>for short-circuit protection of the auxiliary switch required</li> </ul>	gG: 10 A (690 V, 1 kA)	
<b>Installation/ mounting/ dimensions</b>		
<b>mounting position</b>	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface	
<b>fastening method</b>	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 50022	
<b>height</b>	135 mm	
<b>width</b>	45 mm	
<b>depth</b>	165 mm	
<b>required spacing</b>		
<ul style="list-style-type: none"> <li>with side-by-side mounting at the side</li> </ul>	10 mm	
<ul style="list-style-type: none"> <li>for grounded parts at the side</li> </ul>	10 mm	
<b>Connections/ Terminals</b>		
<b>type of electrical connection</b>		
<ul style="list-style-type: none"> <li>for main current circuit</li> </ul>	screw-type terminals	
<ul style="list-style-type: none"> <li>for auxiliary and control circuit</li> </ul>	screw-type terminals	
<ul style="list-style-type: none"> <li>at contactor for auxiliary contacts</li> </ul>	Screw-type terminals	
<ul style="list-style-type: none"> <li>of magnet coil</li> </ul>	Screw-type terminals	
type of connectable conductor cross-sections for main contacts		
<ul style="list-style-type: none"> <li>solid</li> </ul>	2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 10 mm <sup>2</sup> )	
<ul style="list-style-type: none"> <li>stranded</li> </ul>	2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 10 mm <sup>2</sup> )	
<ul style="list-style-type: none"> <li>solid or stranded</li> </ul>	2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 10 mm <sup>2</sup> )	
<ul style="list-style-type: none"> <li>finely stranded with core end processing</li> </ul>	2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup>	
<b>type of connectable conductor cross-sections</b>		
<ul style="list-style-type: none"> <li>for auxiliary contacts</li> </ul>		
<ul style="list-style-type: none"> <li>— solid</li> </ul>	2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> ), 2x 4 mm <sup>2</sup>	
<ul style="list-style-type: none"> <li>— solid or stranded</li> </ul>	2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> ), 2x 4 mm <sup>2</sup>	
<ul style="list-style-type: none"> <li>— finely stranded with core end processing</li> </ul>	2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )	
<ul style="list-style-type: none"> <li>for AWG cables for auxiliary contacts</li> </ul>	2x (20 ... 16), 2x (18 ... 14), 2x 12	
<b>type of minimum connectable cross-sections for main contacts at AC-6b</b>		
<ul style="list-style-type: none"> <li>at 40 °C</li> </ul>	1x 10 mm <sup>2</sup>	
<ul style="list-style-type: none"> <li>at 60 °C</li> </ul>	2x 10 mm <sup>2</sup>	
<b>AWG number as coded connectable conductor cross section for main contacts</b>	16 ... 8	
<b>Safety related data</b>		
<b>product function</b>		
<ul style="list-style-type: none"> <li>mirror contact according to IEC 60947-4-1</li> </ul>	No	
<ul style="list-style-type: none"> <li>positively driven operation according to IEC 60947-5-1</li> </ul>	No	
<b>Electrical Safety</b>		
<b>protection class IP on the front according to IEC 60529</b>	IP20	
<b>touch protection on the front according to IEC 60529</b>	finger-safe, for vertical contact from the front	
<b>Approvals Certificates</b>		
<b>General Product Approval</b>	EMV	
     		
<b>Test Certificates</b>	<b>Maritime application</b>	<b>other</b>

other Dangerous goods Environment

[Confirmation](#)

[Transport Information](#)



[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2626-1BF45>

Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2626-1BF45>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2626-1BF45>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)




[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT2626-1BF45&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2626-1BF45&lang=en)



Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2626-1BF45/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<https://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2626-1BF45&objecttype=14&gridview=view1>

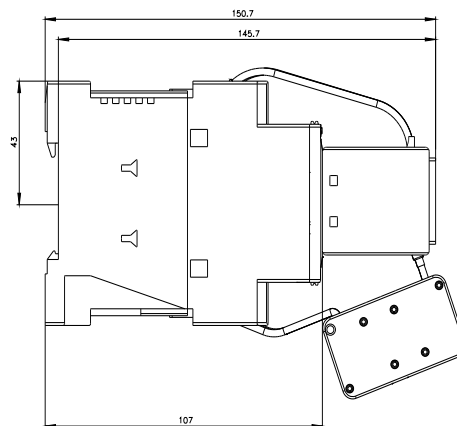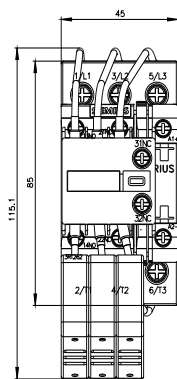

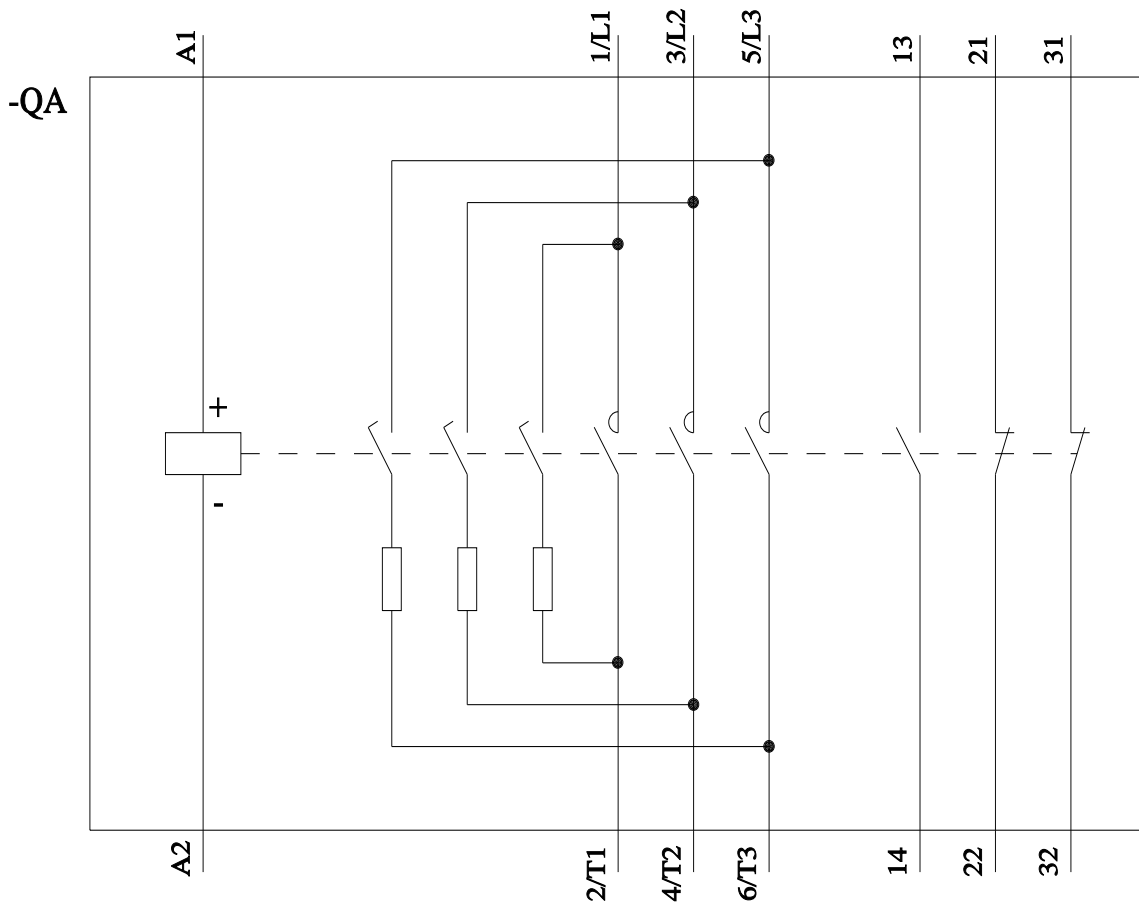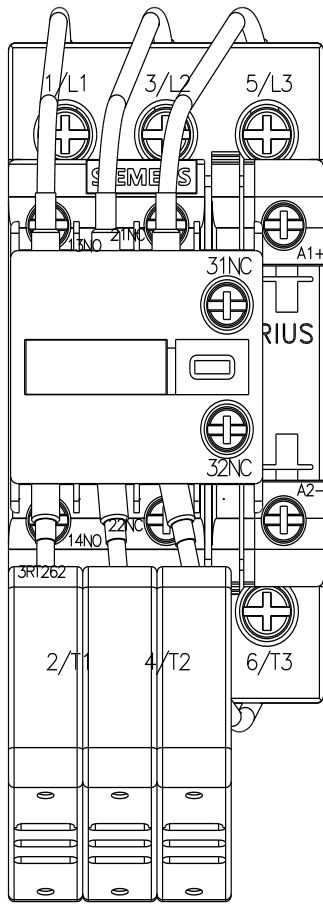

last modified:

11/13/2025