

contactor, DC-3/DC-5, 400 A, 1-pole, 220 V DC, auxiliary contacts: 4 NO + 4 NC, connecting bar

<b>product designation</b>	Contactor
<b>product type designation</b>	3TC
<b>General technical data</b>	
<b>size of contactor</b>	12
<b>product extension</b>	
• function module for communication	No
• auxiliary switch	No
<b>insulation voltage rated value</b>	1 500 V
<b>surge voltage resistance rated value</b>	8 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	630 V
<b>mechanical service life (operating cycles)</b>	
• of contactor typical	30 000 000
• of the contactor with added auxiliary switch block typical	30 000 000
<b>reference code according to IEC 81346-2</b>	Q
<b>Substance Prohibitance (Date)</b>	03/01/2017
<b>SVHC substance name</b>	Lead - 7439-92-1
<b>Weight</b>	9.818 kg
<b>Ambient conditions</b>	
<b>ambient temperature</b>	
• during operation	-25 ... +55 °C
• during storage	-50 ... +80 °C
<b>relative humidity minimum</b>	10 %
<b>relative humidity at 55 °C according to IEC 60068-2-30 maximum</b>	95 %
<b>Main circuit</b>	
<b>number of poles</b>	1
<b>number of poles for main current circuit</b>	1
<b>number of NO contacts for main contacts</b>	1
<b>number of NC contacts for main contacts</b>	0
<b>type of voltage</b>	DC
<b>operational current</b>	
• at 1 current path at DC-1	
— at 24 V rated value	500 A
— at 110 V rated value	500 A
— at 220 V rated value	500 A
— at 440 V rated value	500 A
— at 600 V rated value	500 A
— at 750 V rated value	500 A

<ul style="list-style-type: none"> <li>● <b>at DC-3 at DC-5</b> <ul style="list-style-type: none"> <li>— at 220 V rated value</li> <li>— at 600 V rated value</li> <li>— at 750 V rated value</li> </ul> </li> <li>● <b>at 1 current path at DC-3 at DC-5</b> <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> <li>— at 750 V rated value</li> </ul> </li> </ul>	<p>400 A</p> <p>400 A</p> <p>400 A</p> <p>400 A</p> <p>400 A</p> <p>400 A</p> <p>400 A</p> <p>400 A</p> <p>400 A</p> <p>400 A</p>
<b>operating power</b>	
<ul style="list-style-type: none"> <li>● at DC-1 <ul style="list-style-type: none"> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 750 V rated value</li> </ul> </li> <li>● at DC-3 at DC-5 <ul style="list-style-type: none"> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> <li>— at 750 V rated value</li> </ul> </li> </ul>	<p>55 kW</p> <p>110 kW</p> <p>220 kW</p> <p>375 kW</p> <p>35 kW</p> <p>70 kW</p> <p>140 kW</p> <p>200 kW</p> <p>250 kW</p>
<b>operating frequency</b>	
<ul style="list-style-type: none"> <li>● at DC-1 maximum</li> <li>● at DC-3 maximum</li> <li>● at DC-5 maximum</li> </ul>	<p>750 1/h</p> <p>500 1/h</p> <p>500 1/h</p>
<b>Control circuit/ Control</b>	
<b>type of voltage of the control supply voltage</b>	DC
<b>control supply voltage at DC rated value</b>	220 V
<b>operating range factor control supply voltage rated value of magnet coil at AC</b>	
<ul style="list-style-type: none"> <li>● at 50 Hz</li> </ul>	0.8 ... 1.2
<b>closing power of magnet coil at DC</b>	46 W
<b>holding power of magnet coil at DC</b>	46 W
closing delay at DC	60 ... 100 ms
opening delay at DC	20 ... 35 ms
<b>arcing time</b>	40 ... 70 ms
<b>Auxiliary circuit</b>	
<b>number of NC contacts for auxiliary contacts</b>	4
<ul style="list-style-type: none"> <li>● instantaneous contact</li> </ul>	4
<b>number of NO contacts for auxiliary contacts</b>	4
<ul style="list-style-type: none"> <li>● instantaneous contact</li> </ul>	4
number of CO contacts for auxiliary contacts	0
<b>identification number and letter for switching elements</b>	44
operational current at AC-12 maximum	10 A
<b>operational current at AC-15</b>	
<ul style="list-style-type: none"> <li>● at 230 V rated value</li> <li>● at 400 V rated value</li> <li>● at 500 V rated value</li> </ul>	<p>5.6 A</p> <p>3.6 A</p> <p>2.5 A</p>
<b>operational current at DC-12</b>	
<ul style="list-style-type: none"> <li>● at 24 V rated value</li> <li>● at 48 V rated value</li> <li>● at 60 V rated value</li> <li>● at 110 V rated value</li> <li>● at 125 V rated value</li> <li>● at 220 V rated value</li> <li>● at 600 V rated value</li> </ul>	<p>10 A</p> <p>10 A</p> <p>10 A</p> <p>3.2 A</p> <p>2.5 A</p> <p>0.9 A</p> <p>0.22 A</p>
<b>operational current at DC-13</b>	

• at 24 V rated value	10 A
• at 48 V rated value	5 A
• at 60 V rated value	5 A
• at 110 V rated value	1.14 A
• at 125 V rated value	0.98 A
• at 220 V rated value	0.48 A
• at 600 V rated value	0.07 A

### Short-circuit protection

<b>design of the fuse link</b>	
• for short-circuit protection of the main circuit	
— with type of coordination 1 required	2 x 3NE1330-4D (315 A) parallel (750 V, 12 kA)
— with type of coordination 2 required	2 x 3NE1330-4D (315 A) parallel (750 V, 12 kA)
• for short-circuit protection of the auxiliary switch required	gG: 16 A (500 V, 1 kA)

### Installation/ mounting/ dimensions

<b>mounting position</b>	+/-22,5° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
fastening method side-by-side mounting	Yes
<b>fastening method</b>	screw fixing
<b>height</b>	360 mm
<b>width</b>	78 mm
<b>depth</b>	276 mm
<b>required spacing</b>	
• with side-by-side mounting	
— forwards	20 mm
— backwards	0 mm
— upwards	25 mm
— downwards	10 mm
— at the side	10 mm
• for grounded parts	
— forwards	50 mm
— backwards	0 mm
— upwards	25 mm
— at the side	10 mm
— downwards	10 mm
• for live parts	
— forwards	50 mm
— backwards	0 mm
— upwards	25 mm
— downwards	10 mm
— at the side	10 mm

### Connections/ Terminals

<b>type of electrical connection</b>	screw terminal
• for main current circuit	screw-type terminals
• for auxiliary and control circuit	screw-type terminals
<b>type of connectable conductor cross-sections</b>	
• for auxiliary contacts	
— solid or stranded	2x (1 ... 2.5 mm <sup>2</sup> )
— finely stranded with core end processing	2x (0.75 ... 1.5 mm <sup>2</sup> )

### Safety related data

product function mirror contact according to IEC 60947-4-1	Yes
Electrical Safety	
<b>protection class IP on the front according to IEC 60529</b>	IP00

### Approvals Certificates

General Product Approval	Functional Safety	Test Certificates
--------------------------	-------------------	-------------------



[Type Examination Certificate](#)

[Special Test Certificate](#)

Test Certificates	other	Dangerous goods	Environment
<a href="#">Type Test Certificates/Test Report</a>	<a href="#">Miscellaneous</a>	<a href="#">Confirmation</a>	<a href="#">Transport Information</a>
		<a href="#">Confirmation</a>	<a href="#">Environmental Confirmations</a>

#### Further information

##### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

##### Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3TC7414-0EM>

##### Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TC7414-0EM>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3TC7414-0EM>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3TC7414-0EM&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TC7414-0EM&lang=en)


##### Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3TC7414-0EM/char>

##### Further characteristics (e.g. electrical endurance, switching frequency)

<https://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3TC7414-0EM&objecttype=14&gridview=view1>

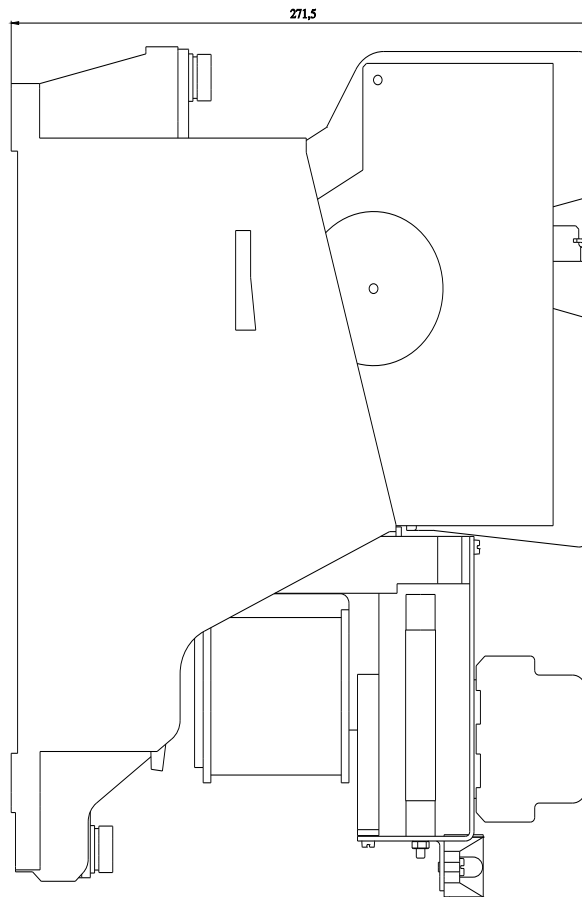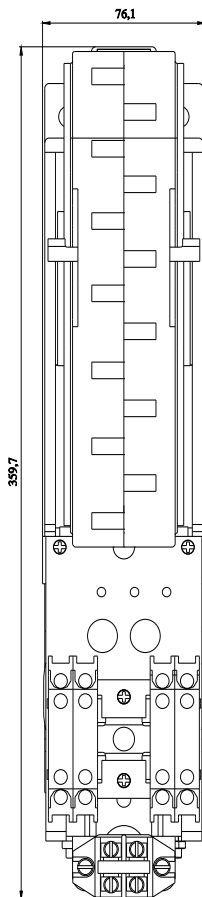

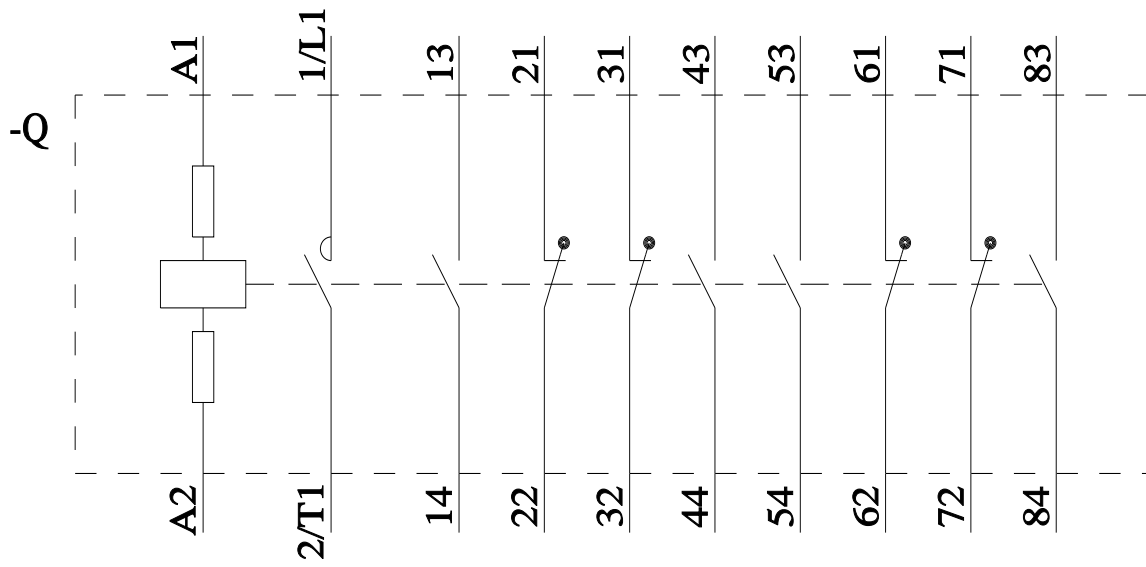

last modified:

4/2/2025 