



Figure similar

!!! product phase-out !!! the preferred successor is 3UG5514-2BR20 phase failure and sequence monitoring 3x 160-690 V, spring-loaded terminal digital monitoring relay asymmetry 0-20% connectable phase sequence phase failure 3 x 160 to 690 V 50 to 60 Hz AC undervoltage 160-690 V hysteresis 1-20 V ON and OFF delay 0-20 s 2 changeover contacts spring-loaded connection system

<b>product brand name</b>	SIRIUS
<b>product designation</b>	Network monitoring relay with digital setting
<b>design of the product</b>	4 functions
<b>product type designation</b>	3UG4
<b>General technical data</b>	
<b>product function</b>	Phase monitoring relay
<b>display version LED</b>	No
<b>design of the display</b>	LCD
<b>insulation voltage for overvoltage category III according to IEC 60664</b>	
• with degree of pollution 3 rated value	690 V
<b>degree of pollution</b>	3
<b>type of voltage</b>	
• for monitoring	AC
<b>surge voltage resistance rated value</b>	6 kV
<b>shock resistance according to IEC 60068-2-27</b>	sinusoidal half-wave 15g / 11 ms
<b>vibration resistance according to IEC 60068-2-6</b>	1 ... 6 Hz: 15 mm, 6 ... 500 Hz: 2g
<b>mechanical service life (operating cycles) typical</b>	10 000 000
electrical endurance (operating cycles) at AC-15 at 230 V typical	100 000
<b>thermal current of the switching element with contacts maximum</b>	5 A
<b>reference code according to IEC 81346-2</b>	K
<b>relative repeat accuracy</b>	1 %
<b>Substance Prohibittance (Date)</b>	05/01/2012
<b>SVHC substance name</b>	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol - 119-47-1
<b>Weight</b>	0.143 kg
<b>Product Function</b>	
<b>product function</b>	
• undervoltage detection	Yes
• overvoltage detection	No
• phase sequence recognition	Yes
• phase failure detection	Yes
• asymmetry detection	Yes
• overvoltage detection 3 phase	No
• undervoltage detection 3 phases	Yes
• voltage window recognition 3 phase	No
• adjustable open/closed-circuit current principle	Yes

• auto-RESET	Yes
<b>Control circuit/ Control</b>	
<b>type of voltage of the control supply voltage</b>	AC
<b>operating range factor control supply voltage rated value at AC at 50 Hz</b>	
• initial value	1
• full-scale value	1
<b>operating range factor control supply voltage rated value at AC at 60 Hz</b>	
• initial value	1
• full-scale value	1
<b>Measuring circuit</b>	
<b>adjustable response delay time</b>	
• when starting	0.1 ... 20 s
• with lower or upper limit violation	0.1 ... 20 s
<b>response time maximum</b>	450 ms
<b>accuracy of digital display</b>	+/-1 digit
<b>Precision</b>	
<b>relative metering precision</b>	5 %
<b>Auxiliary circuit</b>	
number of NC contacts delayed switching	0
number of NO contacts delayed switching	0
<b>number of CO contacts</b>	
• for auxiliary contacts	2
• delayed switching	2
<b>operating frequency with 3RT2 contactor maximum</b>	5 000 1/h
<b>Main circuit</b>	
<b>number of poles for main current circuit</b>	3
<b>ampacity of the output relay at AC-15</b>	
• at 250 V at 50/60 Hz	3 A
• at 400 V at 50/60 Hz	3 A
<b>ampacity of the output relay at DC-13</b>	
• at 24 V	1 A
• at 125 V	0.2 A
• at 250 V	0.1 A
<b>operational current at 17 V minimum</b>	5 mA
<b>continuous current of the DIAZED fuse link of the output relay</b>	4 A
<b>Electromagnetic compatibility</b>	
<b>conducted interference</b>	
• due to burst according to IEC 61000-4-4	2 kV
• due to conductor-earth surge according to IEC 61000-4-5	2 kV
• due to conductor-conductor surge according to IEC 61000-4-5	1 kV
<b>field-based interference according to IEC 61000-4-3</b>	10 V/m
<b>electrostatic discharge according to IEC 61000-4-2</b>	6 kV contact discharge / 8 kV air discharge
<b>Galvanic isolation</b>	
<b>galvanic isolation</b>	
• between input and output	Yes
• between the outputs	Yes
• between the voltage supply and other circuits	Yes
<b>Electrical Safety</b>	
<b>protection class IP on the front according to IEC 60529</b>	IP20
<b>Connections/ Terminals</b>	
<b>product component removable terminal for auxiliary and control circuit</b>	Yes
<b>type of electrical connection</b>	spring-loaded terminals
<b>type of connectable conductor cross-sections</b>	
• solid	2x (0.25 ... 1.5 mm <sup>2</sup> )
• finely stranded with core end processing	2 x (0.25 ... 1.5 mm <sup>2</sup> )

<ul style="list-style-type: none"> <li>finely stranded without core end processing</li> <li>for AWG cables solid</li> <li>for AWG cables stranded</li> </ul>	<p>2x (0.25 ... 1.5 mm<sup>2</sup>)</p> <p>2x (24 ... 16)</p> <p>2x (24 ... 16)</p>
<b>connectable conductor cross-section</b> <ul style="list-style-type: none"> <li>solid</li> <li>finely stranded with core end processing</li> <li>finely stranded without core end processing</li> </ul>	<p>0.25 ... 1.5 mm<sup>2</sup></p> <p>0.25 ... 1.5 mm<sup>2</sup></p> <p>0.25 ... 1.5 mm<sup>2</sup></p>
<b>AWG number as coded connectable conductor cross section</b> <ul style="list-style-type: none"> <li>solid</li> <li>stranded</li> </ul>	<p>24 ... 16</p> <p>24 ... 16</p>

#### Installation/ mounting/ dimensions

<b>mounting position</b>	any
<b>fastening method</b>	snap-on mounting
<b>height</b>	94 mm
<b>width</b>	22.5 mm
<b>depth</b>	91 mm
<b>required spacing</b> <ul style="list-style-type: none"> <li>with side-by-side mounting <ul style="list-style-type: none"> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> </ul> </li> <li>for grounded parts <ul style="list-style-type: none"> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> </ul> </li> <li>for live parts <ul style="list-style-type: none"> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> </ul> </li> </ul>	<p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p>

#### Ambient conditions

installation altitude at height above sea level maximum	2 000 m
<b>ambient temperature</b> <ul style="list-style-type: none"> <li>during operation</li> <li>during storage</li> <li>during transport</li> </ul>	<p>-25 ... +60 °C</p> <p>-40 ... +85 °C</p> <p>-40 ... +85 °C</p>

#### Environmental footprint

Environmental Product Declaration (EPD)	Yes
global warming potential [CO2 eq] total	17.1 kg
global warming potential [CO2 eq] during manufacturing	4.44 kg
global warming potential [CO2 eq] during operation	13.7 kg
global warming potential [CO2 eq] after end of life	-1.06 kg

#### Approvals Certificates

##### General Product Approval



EMV	Test Certificates	Maritime application
-----	-------------------	----------------------



KC

[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



other	Railway	Environment
-------	---------	-------------



[Confirmation](#)

[Special Test Certificate](#)



[Environmental Confirmations](#)

### Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UG4614-2BR20>

Cax online generator


<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UG4614-2BR20>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3UG4614-2BR20>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3UG4614-2BR20&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UG4614-2BR20&lang=en)

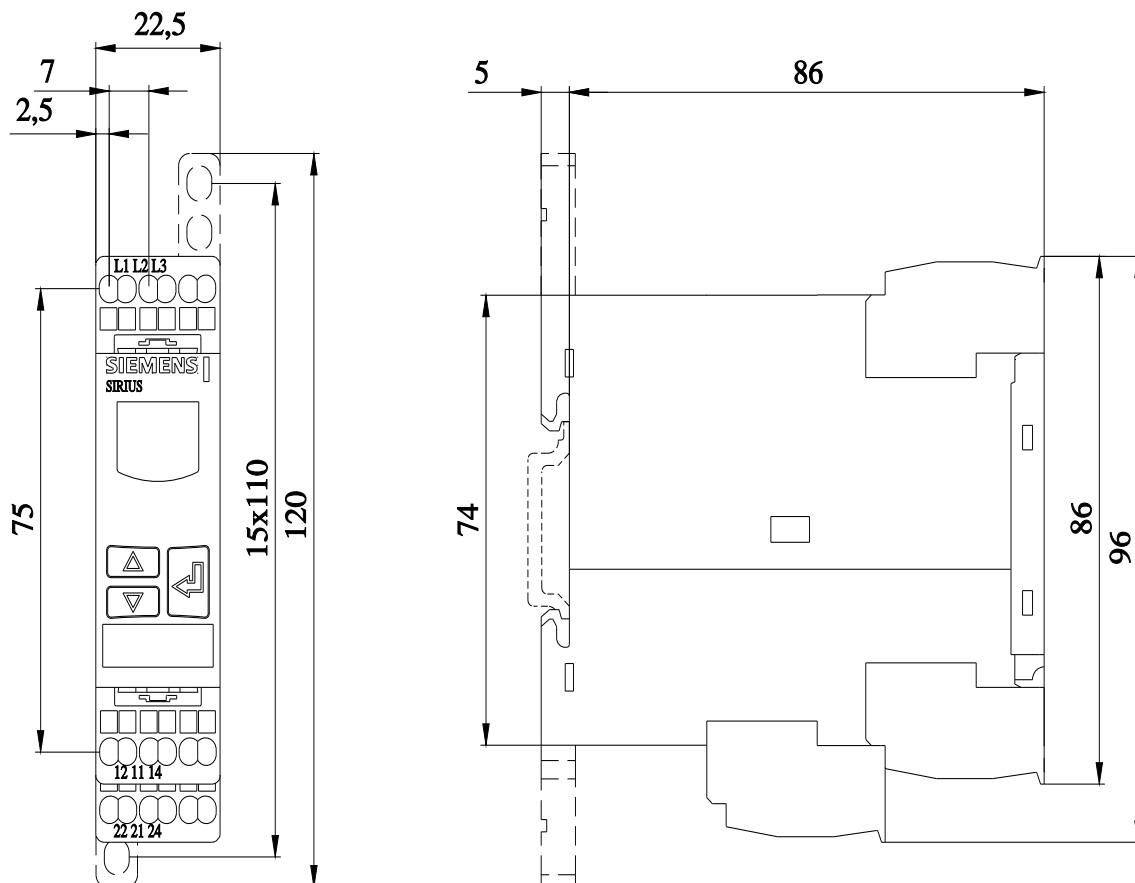

last modified:

10/28/2025