



expansion module Switched Ethernet PROFINET V3, plug-in, for 7KM PAC3220 / 4220 / 3VA COM100 / 800

Model	
product brand name	SETRON
product designation	Switched Ethernet PROFINET expansion module
type of voltage supply	via PAC 3200 / PAC3220 / PAC4200 / COM100 / 800
General technical data	
type of update time at the PROFINET IO device with IRT	500 µs, 1 ms, 2 ms, 4 ms for IRT
design of the interface according to PROFINET	2 ports (switch)
type of transfer rate for plug type RJ45	PROFINET with 100 Mbps
MTBF	196.31 a
galvanic isolation	Maximum insulation voltage: 500V AC
reference code according to DIN 40719 extended according to IEC 204-2 according to IEC 750	P
software version with STEP 7 in the TIA Portal required	≥ STEP 7 V16
GSD version/revision with PROFINET required	GSDML V2.3
number of interfaces according to PROFINET	2
interface design 1 integrated switch	Yes
<ul style="list-style-type: none"> protocol at the 1st interface media redundancy protocol PROFINET IO device 	PROFINET MRP Yes
transmission mode for Industrial Ethernet	PROFINET with 100 Mbps
product function at the Ethernet interface Autonegotiation	Yes
product function at the Ethernet interface Autocrossover	Yes
open IE communication	Yes
IRT	Yes
transfer rate for plug type RJ45 100 Mbit/s	Yes
service as PROFINET IO device supports PROFINET energy	Yes
protocol at the 1st interface media redundancy protocol	Yes
product function of the PROFINET IO controller is supported PROFINET system redundancy	Yes
for open IE communication <ul style="list-style-type: none"> TCP/IP SNMP LLDP 	Yes Yes Yes
degree of pollution	2 according to IEC 61131
supply voltage 1 at DC <ul style="list-style-type: none"> minimum rated value maximum rated value 	28.8 V 19.2 V
Protection class	
protection class IP	IP20

combustibility class according to UL 94	V 0
suitability for use	7KM PAC 3220 / PAC 4200 / PAC 4220 / 3VA COM100 / 800
suitability for use reactive power meter	No

Connections

type of electrical connection	2 x RJ45 socket
-------------------------------	-----------------

Mechanical Design

height	90 mm
width	18 mm
depth	73 mm
fastening method	pluggable
Net Weight	59 g

Environmental conditions

ambient temperature during operation	
• minimum	-25 °C
• maximum	55 °C
ambient temperature during storage	
• minimum	-25 °C
• maximum	70 °C

Environmental footprint

Environmental Product Declaration(EPD)	Yes
global warming potential [CO2 eq] total	7.89 kg
global warming potential [CO2 eq] during manufacturing	8.48 kg
global warming potential [CO2 eq] during operation	0 kg
global warming potential [CO2 eq] after end of life	-0.602 kg

Approvals Certificates

General Product Approval	EMV
--------------------------	-----



KC



other Environment



[Confirmation](#)



Siemens EcoTech



[Environmental Confirmations](#)

[Environmental Confirmations](#)

Industrial Communication

[PROFINET](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=7KM9300-0AE02-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/7KM9300-0AE02-0AA0>




Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=7KM9300-0AE02-0AA0


CAX-Online-Generator

<https://www.siemens.com/cax>

Tender specifications

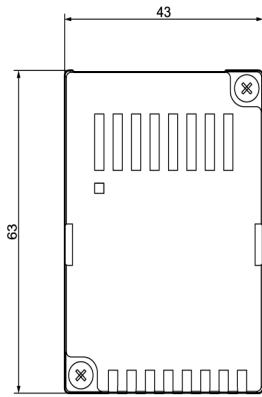

I202_18221



mm
27,5 = 27.5

last modified:

10/14/2025 